



HiKOKI

HIGH PERFORMANCE POWER TOOLS

**Power tools
catalogue
Volume 2**

HiKOKI
The new
name for
Hitachi
Power Tools

Contents

Everything
you need
for the highest
power tool
performance.

Introduction

HiKOKI service

Index

Technologies

Cordless

Screwdrivers	12
Angle drills	12
Drill/drivers	13
Combi drills	14
Impact drivers	16
Impact wrenches	18
Hammer drills	20
Angle grinders	24
Mitre saws	26
Metal cutting saw	27
Circular saws	28
Reciprocating saws	29
Jigsaws	29
Multi tool	30
Bandsaw	30
Planer	30
Stud cutters	31
Shear	31
Nibbler	31
Vacuum	31
Cleaners	32
Nailers	34
Radio	36
Torches	36
Charger	37
Mains Adapter	37
Multi Volt batteries	37
Hedgetrimmer	38
Chainsaw	38
Grass trimmers	39
Blower	39
Kits	40
Heated outerwear	44
USB battery adapters	44
Stackable cases	44

Drilling

Rotary Drills	47
Impact drills	48

Demolition

Rotary hammer drills	50
Rotary demolition hammers	51
Demolition hammers	52

Fastening

Screwdrivers	54
Impact wrenches	54

Sawing

Circular saws	56
Jigsaws	57
Mitre saws	58
Reciprocating saws	59
Multi tool	59

Routing & Planing

Routers	60
Planers	60

Sanding & Polishing

Random orbit sanders	61
Palm Sander	62
Belt sanders	62
Sander polisher	62

Grinding

Die grinders	63
Angle grinders	63

Cutting

Nibbler	67
Cut-off machine	67
Disc cutters	67

Miscellaneous

Mixers	68
Blower	68

Nailers


Gas nailers	69
Pneumatic nailer	69

Spares

Carbon brushes	70
----------------	----

Introduction

Safety

Double-Insulation power tool, indicated by the double square mark , can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

Power input

HiKOKI power tools employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110 to 240V.

General precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children, away from the tool.
4. Wear eye protection to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts are properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at regular intervals by an authorized Service Centre.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Centre for repair and/or part replacement.
15. DO NOT use the power tool for any other application than those specified in the handling instructions.
16. DO NOT use the tool for work beyond its prescribed capability.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in proper clothing and shoes.
25. Always keep the work area in good order.
26. When not in use, store the power tool.
27. DO NOT stare into laser beams.
























Guarantee

Our primary concern is the convenience and satisfaction of the customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials. Defects in workmanship and materials (not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling) will be repaired or replaced without charge.

Notes

1. Koki Holdings reserves the right to change specifications of parts and accessories of HiKOKI power tools without notice.
2. Specifications, features, accessories and parts such as power input, maximum torque, cutting capacity, length, weight brake, hook, spindle thread, chuck, blade, bore and handle, may vary from country to country.
3. Figures of battery capacity are nominal values.
4. Standard accessories such as battery, charger, grinding wheel, sanding paper, blade, washer, collet chuck, chuck sleeve, side handle, dust collection adapter, protective items, wrench and carrying case, sometimes may vary from country to country. Some standard accessories may be excluded from country to country.
5. Please state required voltage and specifications when you order.
6. Orders are subject to product-availability in each country.
7. Some models in this catalogue are shown with optional accessories and fasteners such as screw, nail, bit, socket, blade, battery and grinding wheel.
8. Actual colours of products may differ from those in printed photos of this catalogue.

Icons

	Double insulation		Blower function
	Electronic constant speed control		Brake
	Electronic soft start control		Brake
	Variable speed		2-speed gear
	Random orbit action		Multi-speed settings
	Orbital cutting action		SDS max shank
	Shock absorbing handle type		SDS plus shank
	Reversible		1/2" square shank
	Dust extracting type		1/4" hex shank
	Spindle lock		28mm hex shank
	Slip clutch		30mm hex shank
	Deep cut		Battery capacity
			Carbon brush part number

Battery capacity



Cases

IM Injection moulded	SC Stackable case
BM Blow moulded	X No case

HiKOKI service

Guarantee

We pride ourselves on the convenience and satisfaction of every customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials for a period of one year. Defects in workmanship and materials (not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling) will be repaired or replaced without charge.

Heavy Duty Warranty

The HiKOKI Heavy Duty Warranty scheme covers cordless and electric power tools. You can register your electric power tools for an extra 2 years warranty in addition to the standard 12 months. Mains power tools and cordless tool bodies are covered. Batteries over 3.0Ah are covered, including Multi Volt batteries.

Online registration is required within 4 weeks of purchase via the HiKOKI Power Tools (UK) Ltd website.

What does the extended warranty cover?

We undertake to replace or repair any part found to be defective in material or workmanship, within 36 months of delivery to the original purchaser.

What tools are not covered by the warranty?

This scheme is only available to new tools purchased and used in the UK.

Cordless gas nailers and pneumatic nailers are not eligible for the extended warranty. They are covered by the standard 12 month warranty.

Fleet tools are not eligible for the extended warranty.

These are covered by a 3 month warranty against manufacturing defects.

What is not covered?

- Gas nailers and pneumatic nailers
- Chargers, accessories and other consumable items
- NiCad and NiMH batteries
- Li-Ion batteries with capacity of 1.5Ah, 2.5Ah & 3.0Ah
- Defects arising from neglect, misuse or accident, except as provided by statute.

How do I get my tool repaired?

Contact your nearest HiKOKI authorised service agent. You can find this on our website or by calling us on 01908 660663. You will need to provide your proof of purchase and warranty registration number to the service agent.



HiKOKI
SERVICE

3 YEAR
HEAVY DUTY
WARRANTY

hikoki-powertools.co.uk/service

Index.

A place for
everything
and everything
in its place.

123

712650 58

B

BSL18UA(S) 35

BSL36A18 37

BSL36B18 37

C

C7SB3 56

C7ST 56

C7U3 56

C7UR 56

C8FSE 58

C9U3 57

C10FCE2 58

C12RSH2 58

C18DBAL 28

C18DSL 28

C3605DYA 27

C3606DA 28

C3607DA 28

C3607DRA 26

C3610DRA 27

CB18DBL 30

CC14SF 67

CD3605DA 27

CE18DSL 31

CG36DA 39

CH3656DA 38

CJ18DSL 29

CJ90VST 57

CJ110MV 57

CJ160V 57

CL14DSL 30

CL18DSL 30

CM12Y 67

CM75EAP 67

CN16SA 67

CN18DSL 31

CR13V2 59

CR13VBY 59

CR13VEY 59

CR18DBL 29

CR18DSL 29

CR36DA 29

CS3630DA 38

CV18DBL 30

CV350V 59

D

D6SH 47

D10VC3 47

D10VF 47

D13 48

D13VF 47

DB3DL2 12

DB10DL 14

DH18DBL 20

DH18DSL 20

DH24DVC 20

DH24PX2 50

DH26PX 50

DH28PC 50

DH28PX 50

DH36DMA 21

DH36DPA 22

DH36DPB 22

DH40MC 51

DH40MEY 51

DH45ME 51

DH52ME 51

DN18DSL 12

DS18DSDL 13

DS36DAX 13

DV12DD 14

DV16V 48

DV18DBFL2 15

DV18DBXL 15

DV18DGAL 14

DV18DGL 14

DV18DSDL 14

DV18V 48

DV20VB2 49

DV20VD 49

DV36DAX 15

E

ET36A 37

F

FDV16VB2 48

G

G10SR4 63

G12SE2 65

G12SN2 64

G12SR4 64

G12STX 63

G12STX/CD 64

G13SE2 65

G13YC2 65

G18DBAL 24

G18DBBAL 24

G18DSL 24

G18SE4 65

G23MR 66

G23SC4 66

G23ST 66

G23ST/CD 66

G3612DA 25

G3613DB 25

GP2S2 63

H

H41MB2 53

H45MEY 52

H60MC 52

H60MEY 52

H65SD3 53

H90SG 53

HSC1 44

HSC2 44

HSC3 44

HSC4 44

K

KC18DBFL2 40

KC18DGL 40

KC18DKL 40

KC18DPL2 41

KTL318G 41

KTL318WG 41

KTL318WH2 42

KTL436MV 42

KTL618BL2 42

KTL618S2 42

KTL618SJ2 43

KTL818BL2 43

KTL918S2 43

KTN218S 43

M

M8V2 60

M12V2 60

M12VE 60

N

NH18DSL 35

NR1890DC 34

NR90GC2 69

NT1850DE 35

NT1865DM 35

NT1865DMA 35

NT50AE2 69

NT65GB 69

NT65GS 69

P

P18DSL 31

P20SF 60

R

R18DSL 31

RB36DA 39

RB40VA 68

RP3608DA 33

RP3608DB 33

S

SB8V2 62

SB10V2 62

SP18VA 62

SV12SG 62

SV13YA 61

SV15YC 61

U

UB18DA 36

UB18DAL 36

UB18DJL 36

UC18YTSL 37

UJ1810DA 44

UM12VST 68

UM16VST 68

UR18DSDL 36

W

W6VB3 54

W8VB2 54

WF18DSL 12

WH12DD 16

WH18DBDL2 17

WH18DBFL2 17

WH18DGL 17

WH36DB 17

WR16SE 54

WR18DBDL2 18

WR18DSDL 18

WR18DSDL 18

WR22SE 55

WR25SE 55

WR36DA 19

WR36DB 19

Technologies





Reduced vibration and improved operating efficiency.



Stops the motor's output to reduce twisting of the tool body if the tool bit is suddenly overloaded during operation.



Internal double insulation construction with an aluminum die-cast body and a plastic stator holder.



The IP (Ingress Protection) Code rates the degree of protection provided against intrusion of water, dust, body parts such as hands and fingers, accidental contact by mechanical casings and electrical enclosures. The equivalent European standard is EN 60529.

First digit: Solid particle protection

5 - Dust protection

Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment.

Second digit: Liquid ingress protection

4 - Splashing of water

Water splashing against the enclosure from any direction shall have no harmful effect.

6 - Powerful water jets

Water projected in powerful jets (12.5 mm nozzle) against the enclosure from any direction shall have no harmful effects.



One battery pack, two volt classes - the new and innovative Multi-Volt battery packs. The 36 Volt lithium-ion battery packs are compatible with 18 Volt class cordless tools. Smart connecting technology make this possible; the battery pack is able to detect whether it is being used in an 18 Volt or a 36 Volt device, and is capable of supplying both voltages.

Li-ion

Every 10.8, 14, 18 and 36 Volt Lithium-ion battery pack has a built in Electronic Control Circuit. This unique design provides the safest system available to protect and enhance the performance of these batteries. By always keeping the batteries within safe operating conditions, this electronic control ensures that batteries accept many charges than conventional batteries.

Fan-cooled smart battery chargers for 14, 18 and 36V feature a built in fan-cooling system. When a Lithium-ion battery is being charged, cool air is forced up into the battery pack and circulates around the cells. Ensuring that the cells stay cool allows the charger to replenish the battery to a high capacity without causing damage.



HiKOKI original compact controller with fewer wearing parts (no carbon brush, commutator or rotor coil).



Multi Volt series AC power. DC freedom.

A new generation battery system, which has almost the same size and weight as the 18V battery, but it's the technology inside that provides you with the improvements you need. The double voltage contributes to an optimal power, and without the hassle of cords. Also, the Multi Volt is compatible with almost every HiKOKI cordless tool, which means you can easily switch from one power tool to another, regardless the voltage. So you're just a simple click away from maximum performance.



Cordless Brushless

**BRUSH
LESS**
Brushless Motor

Li-Ion nailer series Blending portability with power.

Experience the same power as pneumatic nailers, but without an air hose, power cord or fuel cell. As well as great portability, the HiKOKI Li-ion Nailer series have good gravity balance and an ergonomic soft grip, which makes your job as easy and comfortable as possible. The unique air spring drive system, which is integrated inside the machine, requires no fuel cell, so the maintenance is reduced. The dry-fire lockout prevents unwanted marks or scratches on the material, so you can rely on a great finish.



AC Brushless

**BRUSH
LESS**
Brushless Motor

AC brushless motor series Everlasting efficiency.

Professionals no longer have to worry about losing voltage and power when using a long extension cord. Our AC Brushless Motor series feature an electronic-circuit control that offers continuous and constant power output. With the innovative AC Brushless Motor you'll experience more power and less energy consumption, and lower heat generation on prolonged tasks.



Cordless Tools



DB3DL2 3.6V Screwdriver

Li-ion



Specifications

Drive	6.35mm (1/4") Hex Bit Shank
Capacity : Mild Steel	5mm
Wood Screw (D x L)	3.8 x 38mm
Machine Screw	5mm
Battery Voltage	3.6V
No Load Speed:	
High	600/min
Low	200/min
Torque Setting	0.3 - 2.9Nm
Overall Length: Straight	268mm
Angled	210mm
Weight	0.45kg



Variant	Voltage	Contents	Case	GTIN
DB3DL2JLZ	3.6V	DB3DL2 + 2 x 1.5Ah Li-ion batteries + charger	BM	4966376306152

WF18DSL 18V Collated Screwdriver

Li-ion



Specifications

Drive	6.35mm (1/4") hex bit shank
Capacity:	
Screw Size	4mm
Screw Length	25 - 41mm
Loading	50 screws
Battery Voltage	18V
No Load Speed	4200/min
Overall Length	379mm
Weight	2.1kg



Variant	Voltage	Contents	Case	GTIN
WF18DSLJZ	18V	WF18DSL + 2 x 5.0 Ah Li-ion batteries + UC18YRSL charger + 3 x PH2 bits + 3 x surface protectors	BM	4966376319824
WF18DSLJ4Z	18V	WF18DSL + 3 x PH2 bits + 3 x surface protectors	X	5017658062958

Screws not included

DN18DSL 18V Angle Drill 18V Drill/Driver

Li-ion



Specifications

Drill Chuck	10mm
Head Height	88mm
Centre Height	23mm
Capacity: Mild Steel	10mm
Soft Wood	28mm
Wood Screw (D x L)	5.1 x 38mm
Battery Voltage	18V
No Load Speed	0-1800/min
Max Torque (hard)	12Nm
Overall Length	326mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
DN18DSL4Z	18V	DN18DSL (body only)	X	4966376308507



DS18DSDL
18V Drill/Driver



Li-ion

Specifications

Drill Chuck	1.5-13mm
Capacity: Mild Steel	13mm
Soft Wood	65mm
Wood Screw (D x L)	8 x 100mm
Machine Screw	6mm
Battery Voltage	18V
No Load Speed: High	0-1600/min
Low	0-350/min
Max Torque Hard	92Nm
Max Torque Soft	46Nm
Torque Setting	2-8Nm
Overall Length	228mm
Weight	2.1kg



Variant	Voltage	Contents	Case	GTIN
DS18DSDLJZ	18V	DS18DSDL + 2 x 5.0Ah Li-ion batteries + UC18YRSL charger	IM	4966376311163
DS18DSDLW4Z	18V	DS18DSDL (body only)	None	4966376311255

DS36DAX
36V Brushless Drill/Driver



MV
MULTI VOLT
Li-ion
BRUSHLESS
Brushless Motor

Specifications

Drill Chuck	1.5 - 13mm
Capacity: Mild Steel	16mm
Soft Wood	102mm
Wood Screw	12 x 100mm
Machine Screw	6mm
Battery Voltage	36V
No Load Speed: High	0 - 2100/min
Low	0 - 500/min
Max Torque: Hard	138Nm
Torque Setting	2 - 8Nm
Overall Length	204mm
Weight	2.7kg



Variant	Voltage	Contents	Case	GTIN
DS36DAXJRZ	36V	DS36DAX + 2 x 5.0Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376311538
DS36DAXJ4Z	36V	DS36DAX (body only)	X	4966376311521

DV12DD 12V Peak Combi Drill

NEW
**12V
PEAK**

Li-ion
BRUSHLESS
Brushless Motor



Specifications

Drill Chuck	0.8-10mm
Capacity:	Brick 8mm
	Mild Steel 10mm
	Soft Wood 29mm
	Wood Screw 5,8 x 45mm
Battery Voltage	12V peak
No Load Speed:	High 0 - 1700/min
	Low 0 - 440/min
Impact Rate:	High 0 - 25500/min
	Low 0 - 6600/min
Max Torque: Hard	38Nm
Torque Setting	0.5-5Nm
Overall Length	162mm
Weight inc battery	1.2kg



Variant	Voltage	Contents	Case	GTIN
DV12DDJHZ	12V Peak	DV12DD + 2 x 4.0Ah Multi Volt batteries + UC12SL charger	SC	4966376325566
DV12DDJ4Z	12V Peak	DV12DD (body only)	X	4966376325542

DV18DGL 18V Combi Drill

Li-ion



Specifications

Drill Chuck	2.0-13mm keyless
Capacity:	Brick 13mm
	Mild Steel 13mm
	Soft Wood 38mm
	Wood Screw 8 x 75mm
	(D x L)
	Machine Screw 6mm
Battery Voltage	18V
No Load Speed:	High 0-1400/min
	Low 0-350/min
Impact Rate:	High 0-19600/min
	Low 0-4900/min
Max Torque Hard	55Nm
Max Torque Soft	23Nm
Torque Setting	1-6Nm
Overall Length	220mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
DV18DGLJMZ	18V	DV18DGL + 2 x 3.0Ah Li-ion batteries + UC18YKSL charger	IM	4966376312696
DV18DGLJRZ	18V	DV18DGL + 2 x 5.0Ah Multi Volt batteries + UC18YKSL charger	IM	5017658062460

DV18DGAL 18V Combi Drill (4 pole motor)

Li-ion



Specifications

Drill Chuck	13mm keyless
Capacity:	Brick 13mm
	Mild Steel 13mm
	Soft Wood 38mm
Battery Voltage	18V
No Load Speed:	High 0-1500/min
	Low 0-400/min
Impact Rate	0-21000/min
Max Torque Hard	70Nm
Overall Length	210mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
DV18DGALJMZ	18V	DV18DGAL + 2 x 3.0Ah Li-ion batteries + UC18YKSL charger	IM	4966376312641
DV18DGALJZ	18V	DV18DGAL + 2 x 5.0Ah Li-ion batteries + UC18YKSL charger	IM	4966376312634

DV18DSDL 18V Combi Drill

Li-ion



Specifications

Drill Chuck	1.5-13mm keyless
Capacity:	Brick 16mm
	Mild Steel 13mm
	Soft Wood 65mm
	Wood Screw 8 x 100mm
	(D x L)
Machine Screw	6mm
Battery Voltage	18V
No Load Speed	Hi: 0-1800/min Lo: 0-400/min
Impact Rate	Hi: 0-27000/min Lo: 0-6000/min
Max Torque Hard	92Nm
Max Torque Soft	43Nm
Torque Setting	2-8Nm
Overall Length	242mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
DV18DSDLJZ	18V	DV18DSDL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	IM	4966376313044
DV18DSDLW4Z	18V	DV18DSDL (body only)	X	4966376313143

DV18DBFL2
18V Brushless Combi Drill



Drill Chuck 13mm keyless
Capacity: Brick 16mm
Mild Steel 13mm
Soft Wood 50mm
Battery Voltage 18V
No Load Speed Hi: 0-1800/min Lo: 0-400/min
Impact Rate Hi: 0-2700/min Lo: 0-6000/min
Max Torque Hard 70Nm
Overall Length 189mm
Weight 1.7kg



Variant	Voltage	Contents	Case	GTIN
DV18DBFL2JMZ	18V	DV18DBFL2 + 2 x 3.0Ah Li-ion batteries + UC18YKSL charger	IM	4966376312122

DV18DBXL
18V Brushless Combi Drill



Specifications

Drill Chuck 1.5-13mm
Capacity: Brick 16mm
Mild Steel 13mm
Soft Wood 76mm
Wood Screw 10mm x 90mm
(D x L)
Machine Screw 6mm
Battery Voltage 18V
No Load Speed :High 0-2100
Low 0-500/min
Impact Rate :High 0-31500/min
Low 0-7500/min
Max Torque Hard 136Nm
Overall Length 204mm
Weight 2.5kg



Variant	Voltage	Contents	Case	GTIN
DV18DBXLJXZ	18V	DV18DBXL + 2 x 6.0Ah Li-ion batteries + UC18YFSL charger	SC	4966376312535
DV18DBXLJ4Z	18V	DV18DBXL (body only)	X	4966376312511

DV36DAX
36V Multi Volt Brushless
Combi Drill



Specifications

Drill Chuck 1.5 - 13mm
Capacity: Brick 20mm
Mild Steel 16mm
Soft Wood 102mm
Wood Screw 12 x 100mm
Machine Screw 6mm
Battery Voltage 36V
No Load Speed: High 0 - 2100/min
Low 0 - 500/min
Impact Rate: High 0 - 31500/min
Low 0 - 7500/min
Max Torque: Hard 138Nm
Torque Setting 2 - 8Nm
Overall Length 204mm
Weight 2.7kg



Variant	Voltage	Contents	Case	GTIN
DV36DAXJRZ	36V	DV36DAX + 2 x 2.5Ah Multi Volt batteries + UC18YSL charger	SC	4966376313365
DV36DAXJ4Z	36V	DV36DAX (body only)	X	4966376313358

Impact tools



WH12DD
12V Peak Impact Driver

NEW

**12V
PEAK**

Li-ion
BRUSHLESS
Brushless Motor



Specifications

- Capacity:
- Screw M4-M8
 - Bolt M5-M15
 - HS Bolt M5-M12
- Drive 6.35mm (1/4") hex
- Battery Voltage 12V peak
- No Load Speed 0-3200/min
- Full Load Impact Rate 0-4000/min
- Max Torque 135Nm
- Overall Length 134mm
- Weight 1.1kg



Variant	Voltage	Contents	Case	GTIN
WH12DDJHZ	12V Peak	WH12DD + 2 x 4.0Ah Multi Volt batteries + UC12SL charger	SC	4966376325450
WH12DDJ5Z	12V Peak	WH12DD (body only)	X	4966376325443

WH18DGL 18V Impact Driver

Li-ion



Specifications

Capacity: Bolt	6-14mm
HT Bolt	6-12mm
Machine Screw	4-8mm
Drive	6.35mm (1/4") hex bit shank
Tightening Torque	145Nm
Battery Voltage	18V
No Load Speed	0-2400/min
Full Load Impact Rate	0-3200/min
Overall Length	166mm
Weight	1.4kg



Variant	Voltage	Contents	Case	GTIN
WH18DGLJ4Z	18V	WH18DGL (body only)	X	4966376321094

Driver bit not included

WH18DBFL2 18V Brushless Impact Driver

Li-ion
BRUSH LESS
Brushless Motor



Specifications

Capacity: Bolt	5-16mm
HT Bolt	5-12mm
Machine Screw	4-10mm
Drive	6.35mm (1/4") hex bit shank
Tightening Torque	172Nm
Battery Voltage	18V
No Load Speed	0-3100/min
Full Load Impact Rate	0-3200/min
Overall Length	126mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
WH18DBFL2JJZ	18V	WH18DBFL2 + 2 x 5.0Ah Li-ion batteries + UC18YSL3 charger		4966376320936
WH18DBFL2J4Z	18V	WH18DBFL2 (body only)	X	4966376320929

WH18DBDL2 18V Brushless Impact Driver

IP56
Li-ion
BRUSH LESS
Brushless Motor
TRIPLE HAMMER



Specifications

Capacity: Bolt	5 - 18mm
HT Bolt	5 - 14mm
Machine Screw	4 - 10mm
Self Drilling Screw	3.5 - 6mm
Drive	6.35mm (1/4") Hex Bit Shank
Tightening Torque	207Nm
Battery Voltage	18V
No Load Speed:	
Power Mode	0 - 2900/min
Normal Mode	0 - 2900/min
Soft Mode	0 - 900/min
Self Drilling Screw Mode	0 - 2900/min
Full Load Impact Rate:	
Power Mode	0 - 4000/min
Normal Mode	0 - 4000/min
Soft Mode	0 - 1900/min
Self Drilling Screw Mode	0 - 2100/min
Overall Length	127mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
WH18DBDL2JXZ	18V	WH18DBDL2 + 2 x 6.0Ah Li-ion batteries + UC18YSL3 charger	SC	4966376320806
WH18DBDL2J4Z	18V	WH18DBDL2 (body only)	X	4966376320783

Driver bit not included

WH36DB 36V Brushless Impact Driver

MV
MULTI VOLT

Li-ion **BRUSH LESS**
Brushless Motor
IP56 **TRIPLE HAMMER**



Specifications

Capacity: Bolt	5 - 18mm
HT Bolt	5 - 14mm
Machine Screw	4 - 10mm
Self Drilling Screw	3.5 - 6mm
Drive	6.35mm (1/4") Hex Bit Shank
Tightening Torque	210Nm
Battery Voltage	36V
No Load Speed:	
Power Mode	0 - 2900/min
Normal Mode	0 - 2900/min
Soft Mode	0 - 900/min
Self Drilling Screw Mode	0 - 2900/min
Impact Rate:	
Power Mode	0 - 4100/min
Normal Mode	0 - 4100/min
Soft Mode	0 - 2000/min
Self Drilling Screw Mode	0 - 2200/min
Overall Length	127mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
WH36DBJRZ	36V	WH36DB + 2 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376321544
WH36DBJ4Z	18V	WH36DB (body only)	X	4966376321537

Driver bit not included

WR18DSDL 18V Impact Wrench



Specifications

Capacity: Bolt	10-18mm
HT Bolt	8-14mm
Drive	12.7mm (½") square
Tightening Torque:	
Power mode	255Nm
Save mode	140Nm
Battery Voltage	18V
No Load Speed:	
Power mode	0-2600/min
Save mode	0-2000/min
Full Load Impact Rate	0-3200/min
Overall Length	173mm
Weight	1.7kg



Li-ion

Variant	Voltage	Contents	Case	GTIN
WR18DSDLJJZ	18V	WR18DSDL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	IM	4966376322954
WR18DSDLW4Z	18V	WR18DSDL (body only)	X	4966376323043

WR18DSDL 18V Impact Wrench



Specifications

Capacity: Bolt	12-22mm
HT Bolt	12-16mm
Drive	12.7mm (½") square
Tightening Torque	480Nm
Battery Voltage	18V
No Load Speed	1500/min
Full Load Impact Rate	2000/min
Overall Length	264mm
Weight	3.4kg



Li-ion

Variant	Voltage	Contents	Case	GTIN
WR18DSDLJJZ	18V	WR18DSDL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	IM	4966376323272
WR18DSDLW4Z	18V	WR18DSDL (body only)	X	4966376323388

WR18DBDL2 18V Brushless Impact Wrench



Specifications

Capacity: Bolt	M10 - M20
HT Bolt	M10 - M16
Drive	12.7mm (½") square
Tightening Torque	305Nm
Battery Voltage	18V
No Load Speed:	
High Mode	0 - 2700/min
Medium Mode	0 - 2000/min
Low Mode	0 - 1000/min
Single Mode	0 - 2700/min
Full Load Impact Rate	0 - 3600/min
Overall Length	145mm
Weight	1.8kg



IP56
Li-ion
BRUSHLESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
WR18DBDL2JXZ	18V	WR18DBDL2 + 2 x 6.0Ah Li-ion batteries + UC18YSL3 charger	SC	4966376322671
WR18DBDL2W4Z	18V	WR18DBDL2 (body only)	X	4966376322725

WR36DA

36V 19mm (3/4") Brushless Impact Wrench



Specifications

Capacity: Bolt	M12 – M30
HT Bolt	M10 – M24
Drive	19mm (3/4") square
Tightening Torque	1100Nm
Battery Voltage	36V
No Load Speed:	
High Mode	0 – 1500/min
Medium Mode	0 – 1200/min
Low 2 Mode	0 – 900/min
Low 1 Mode	0 – 600/min
Impact Rate:	
High Mode	0 – 2900/min
Medium Mode	0 – 2300/min
Low 2 Mode	0 – 1800/min
Low 1 Mode	0 – 1200/min
Overall Length	221mm
Weight	3.7kg



1100Nm Torque

IP56 protection

Multi Volt batteries

Mains equivalent power



Variant	Voltage	Contents	Case	GTIN
WR36DAJRZ	36V	WR36DA + 2 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376323586
WR36DAJ4Z	36V	WR36DA (body only)	X	4966376323555

WR36DB

36V 12.7mm (1/2") Brushless Impact Wrench



Specifications

Capacity: Bolt	M12 – M30
HT Bolt	M10 – M24
Drive	12.7mm (1/2") square
Tightening Torque	1050Nm
Battery Voltage	36V
No Load Speed:	
High Mode	0 – 1500/min
Medium Mode	0 – 1200/min
Low 2 Mode	0 – 900/min
Low 1 Mode	0 – 600/min
Impact Rate:	
High Mode	0 – 2800/min
Medium Mode	0 – 2300/min
Low 2 Mode	0 – 1800/min
Low 1 Mode	0 – 1200/min
Overall Length	221mm
Weight	3.7kg



Variant	Voltage	Contents	Case	GTIN
WR36DBJRZ	36V	WR36DB + 2 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376323777
WR36DBJ4Z	36V	WR36DB (body only)	X	4966376323746

DH18DSL

18V SDS-Plus Rotary Hammer Drill



Variants

- DH18DSLW4Z body only

Li-ion

Specifications

Capacity: Concrete	16mm
Mild Steel	13mm
Wood	18mm
Bit Shank	SDS-plus
Battery Voltage	18V
No Load Speed	0-750/min 0-1500/min
Impact Rate	0-3100/min 0-6200/min
Impact Energy	1.4 Joules
Overall Length	276mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
DH18DSLW4Z	18V	DH18DSL (body only)	X	4966376306954

DH18DBL

18V SDS-Plus Rotary Hammer Drill



Li-ion
BRUSH
LESS
Brushless Motor

Specifications

Capacity: Concrete	26mm
Mild Steel	13mm
Wood	27mm
Bit Shank	SDS-plus
Battery Voltage	18V
No Load Speed	0-1050/min
Impact Rate	0-3950/min
Impact Energy	2.6 Joules
Overall Length	390mm
Weight	3.7kg



Variant	Voltage	Contents	Case	GTIN
DH18DBLJPZ	18V	DH18DBL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	SC	4966376306503
DH18DBLJ4Z	18V	DH18DBL (body only)	X	4966376306497

Drill bit not included

DH24DVC

24V SDS-Plus Rotary Hammer Drill



Specifications

Capacity: Concrete	20mm
Mild Steel	13mm
Wood	27mm
Bit Shank	SDS-plus
Battery Voltage	24V
No Load Speed	0-1250/min
Impact Rate	0-5600/min
Impact Energy	1.7 Joules
Overall Length	305mm
Weight	4.1kg



Variant	Voltage	Contents	Case	GTIN
DH24DVCJKZ	24V	DH24DVC + 2 x 2.0Ah NiMH batteries + UC24SGH charger	BM	4966376307029

Drill bit not included

DH36DMA

36V Brushless SDS-Max Hammer Drill



MV
MULTI VOLT
Li-ion
BRUSH
LESS
Brushless Motor

SDS-Max power

Multi Volt batteries

8.5 Joules impact energy

Variable speed



Specifications

Capacity	
Concrete: Drill Bit	40mm
Core Bit	105mm
Bit Shank	SDS max
Battery Voltage	36V
No Load Speed	260 - 590/min
Full Load Impact Rate	1420 - 2860/min
Impact Energy	8.5 Joules
Overall Length	496mm
Weight	6.94kg without battery



Variant	Voltage	Contents	Case	GTIN
DH36DMAJAZ	36V	DH36DMA + 2 x 4.0Ah Multi Volt Li-ion batteries + UC18YSL3 charger + grease pack	BM	4966376325245
DH36DMAJ3Z	36V	DH36DMA (body only)	BM	4966376307630

Drill bit not included

Dust extraction unit

HEPA filter

Multi Volt batteries

Mains equivalent power

DH36DPB

36V Brushless SDS-Plus Hammer Drill With Dust Extraction



Specifications

Capacity: Concrete 20mm
 Bit Shank SDS-plus
 Battery Voltage 36V
 No Load Speed 0 - 1100/min
 Impact Rate 0 - 4300/min
 Impact Energy 3.3 Joules
 Overall Length 493mm
 Weight 5.7kg



Variant	Voltage	Contents	Case	GTIN
DH36DPBJKZ	36V	DH36DPB + 3 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	BM	4966376307937
DH36DPBJ3Z	36V	DH36DPB (body only)		4966376307920

Drill bit not included

DH36DPA

36V Brushless SDS-Plus Hammer Drill



Specifications

Capacity: Concrete 28mm
 Steel 13mm
 Wood 32mm
 Bit Shank SDS-plus
 Battery Voltage 36V
 No Load Speed 0 - 1100/min
 Impact Rate 0 - 4300/min
 Impact Energy 3.3 Joules
 Overall Length 351mm
 Weight 3.9kg



Variant	Voltage	Contents	Case	GTIN
DH36DPAJRZ	36V	DH36DPA + 2 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376307821
DH36DPAJSZ	36V	DH36DPA + 3 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376307838
DH36DPAJ3Z	36V	DH36DPA (body only)	SC	4966376307807

Drill bit not included



G18DSL 18V Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Voltage	18V
No Load Speed	9100/min
Overall Length	296mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G18DSLJJZ	18V	G18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + abrasive wheel + side handle + wrench	BM	4966376314676
G18DSLW4Z	18V	G18DSL + abrasive wheel + side handle + wrench	X	4966376314799

G18DBAL 18V Brushless Angle Grinder



Specifications

Capacity: Wheel Dia.	115mm
Hole Dia.	22.2mm
Spindle Thread	M14 x 2
Voltage	18V
No Load Speed	9000/min
	AUTO mode : 5500/min
Overall Length	326mm
Weight	2.4kg



Variant	Voltage	Contents	Case	GTIN
G18DBALJJZ	18V	G18DBAL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + abrasive wheel + side handle + wrench	BM	4966376313921
G18DBALW4Z	18V	G18DBAL + abrasive wheel + side handle + wrench	X	4966376313945

G18DBBAL 18V Brushless Angle Grinder with Brake



Specifications

Capacity: Wheel Dia.	115mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Voltage	18V
No Load Speed	9000/min
	AUTO mode : 5500/min
Overall Length	326mm
Weight	2.7kg



Variant	Voltage	Contents	GTIN
G18DBBALJJZ	18V	G18DBBAL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + abrasive wheel + side handle + wrench	4966376314027
G18DBBALW4Z	18V	G18DBBAL + abrasive wheel + side handle + wrench	4966376314041

G3613DB

36V Brushless Angle
Grinder - Paddle Switch



Li-ion
BRUSH
LESS
Brushless Motor

Specifications

Capacity: Wheel Dia.	125mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Battery Voltage	36V
No Load Speed:	
Transmission Mode	3000 - 9500/min
AUTO Mode	5500/min
Overall Length	358mm
Weight	2.8kg



Multi Volt batteries

High overload capacity

Electronic brake

Auto mode

Variant	Voltage	Contents	Case	GTIN
G3613DBJRZ	36V	G3613DB + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger + abrasive wheel + side handle + wrench	SC	4966376315031
G3613DBWZ2	36V	G3613DB + abrasive wheel + side handle + wrench	SC	4966376315048

G3612DA

36V Brushless Angle
Grinder - Side Switch



Li-ion
BRUSH
LESS
Brushless Motor



Specifications

Capacity: Wheel Dia.	115mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Voltage	36V
No Load Speed:	
Transmission Mode	3000 - 9500/min
Mode	5500/min
AUTO Mode	
Overall Length	358mm
Weight	2.8kg



Variant	Voltage	Contents	Case	GTIN
G3612DAJRZ	36V	G3612DA + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger + abrasive wheel + side handle + wrench	SC	4966376314959
G3612DAJZ3	36V	G3612DA + abrasive wheel + side handle + wrench	SC	4966376314942

NEW

C3607DRA
Multi Volt Slide Compound Mitre Saw



Twin belt drive - low noise

Fine bevel adjustment

Laser guide

Fixed pipe slide action

Specifications

Blade	185mm x 40T
(H x W) Cross Cut:	0° 58 x 310mm
Mitre Cut:	45° L/R 58 x 218mm
Bevel Cut:	45° L 39 x 310mm
Bevel Cut:	45° R 16 x 310mm
Mitre Angle:	Right 0-57°
	Left 0-45°
Bevel Angle:	Left 0-45°
	Right 0-45°
Voltage	36V
No Load Speed	4000/min
Dimensions (w/o dust bag)	830 x 780 x 484mm
Weight	15.4kg

Variant	Voltage	Contents	Case	GTIN
C3607DRAJGZ	36V	C3607DRA + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger + dust bag + sub table assy + holders + wrench	X	4966376324125

C3610DRA
Multi Volt Slide Compound Mitre Saw



NEW



Specifications

Blade	255mm
(H x W) Cross Cut:	0° 89 x 292mm
Mitre Cut:	45° L/R 89 x 204mm
Bevel Cut:	45° L 45 x 292mm
Bevel Cut:	45° R 25 x 292mm
Mitre Angle:	Right 0-60°
	Left 0-55°
Bevel Angle:	Left 0-48°
	Right 0-48°
Voltage	36V
No Load Speed	4000/min
Dimensions	778 x 792 x 686mm
Weight	20.6kg

Variant	Voltage	Contents	Case	GTIN
C3610DRAJAZ	36V	C3610DRA + 2 x 4.0Ah Multi Volt batteries + UC18YSL3 charger + dust bag + vice assy + sub fence + wrench	X	4966376324453
C3610DRAW4Z	36V	C3610DRA + dust bag + vice assy + sub fence + wrench	X	4966376324408

C3605DYA
125mm Multi Volt Circular saw



NEW



Specifications

Blade	125mm
Cutting Capacity:	0° 47mm
	45° 30mm
Voltage	36V
No Load Speed	4000/min
Dimensions	277 x 193 x 236mm
Weight	2.8kg

Variant	Voltage	Contents	Case	GTIN
C3605DYAJ4Z	36V	C3605DYA (body only)	SC	4966376328291

CD3605DA
125mm Multi Volt Metal Cutting Saw



NEW



Specifications

Blade	125mm
Cutting Capacity	46mm
Voltage	36V
No Load Speed:	Power 3600/min
	Silent 2400
Dimensions	286 x 193 x 236mm
Weight	2.8kg

Variant	Voltage	Contents	GTIN
C3605DAJ3Z	36V	C3605DA (body only)	4966376328352

C18DSL

36V 165mm Circular Saw



Specifications

Capacity: Blade Dia	165mm
Max Cut Depth	90°: 57mm 45°: 40mm
Voltage	18V
No Load Speed	3400/min
Overall Length	365mm (14-3/8")
Weight	3.2kg (7.1lbs.)



Li-ion

Variant	Voltage	Contents	Case	GTIN
C18DSLJZ	18V	C18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger	BM	4966376302086
C18DSLW4Z	18V	C18DSL (body only)	X	4966376302192

C18DBAL

36V 185mm Circular Saw



Specifications

Capacity: Blade Dia.	165mm
Max Cut Depth	90°: 66mm 45°: 45mm
Voltage	18V
No Load Speed	
Power Mode	4100/min
Silent Mode	2500/min
Overall Length	294mm with BSL1850
Weight	3.2kg with BSL1850



Li-ion
BRUSH LESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
C18DBALJPZ	18V	C18DBAL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger	SC	4966376301713
C18DBALJ4Z	18V	C18DBAL (body only)	X	4966376301706

C3606DA

18V 165mm Circular Saw

MV
MULTI VOLT



Specifications

Capacity: Blade Dia.	165mm
Max Cut Depth:	
90°	66mm
45°	45mm
Voltage	36V
No Load Speed:	
Power Mode	4300/min
Silent Mode	2000/min
Overall Length	292mm
Weight	3.4kg



Li-ion
BRUSH LESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
C3606DAJRZ	36V	C3606DA + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger	SC	4966376302307
C3606DAJ3Z	36V	C3606DA (body only)	SC	4966376302277

C3607DA

18V 165mm Circular Saw

MV
MULTI VOLT



Specifications

Capacity: Blade Dia.	185mm
Max Cut Depth:	
90°	62mm
45°	47.5mm
Voltage	36V
No Load Speed:	
Power Mode	4300/min
Silent Mode	2000/min
Overall Length	335mm
Weight	3.4kg



Li-ion
BRUSH LESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
C3607DAJRZ	36V	C3607DA + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger	SC	4966376313631
C3607DAJ3Z	36V	C3607DA (body only)	SC	4966376313600

CR18DSL
18V Reciprocating Saw



Specifications

Capacity:	Pipe	90mm
	Steel Plate	10mm
	Wood	90mm
Voltage		18V
Length of Stroke		28mm
No Load Speed		0 - 2100/min
Overall Length		434mm
Weight		3.4kg



Variant	Voltage	Contents	Case	GTIN
CR18DSLJZ	18V	CR18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + blade + wrench	BM	4966376305216
CR18DSLW4Z	18V	CR18DSL + blade + wrench	X	4966376305315

CR18DBL
18V Brushless Reciprocating Saw



Specifications

Capacity:	Mild Steel Pipe	130mm
	PVC Pipe	130mm
	Wood	120mm
	Mild Steel Plate	19mm
Voltage		18V
Length of Stroke		32mm
No Load Speed		0 - 2500/min
Overall Length		435mm
Weight		3.4kg with BSL1850



Variant	Voltage	Contents	Case	GTIN
CR18DBLJZ	18V	CR18DBL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + blade + wrench	BM	4966376304929
CR18DBLJ4Z	18V	CR18DBL + blade + wrench	X	4966376304912

CR36DA
36V Brushless Reciprocating Saw



Specifications

Capacity:	Pipe	130mm
	Wood	300mm
	Mild Steel Plate	19mm
Voltage		36V
Length of Stroke		32mm
No Load Speed		0-1700/min 0-2000/min 0-2500/min 0-3000/min
Overall Length		457mm
Weight		4.5kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
CR36DAJAZ	36V	CR36DA + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger + blade	BM	4966376324859
CR36DAJ4Z	36V	CR36DA + blade	X	4966376324842

CJ18DSL
18V Jigsaw



Specifications

Capacity:	Wood	135mm
	Mild Steel Plate	10mm
Min Cutting Radius		25mm
Base Tilt Angle		45° Right/Left
Voltage		18V
Length of Stroke		26mm
No-Load Speed(stroke)		0-2400/min
Overall Length		277mm
Weight		2.4kg



Variant	Voltage	Contents	Case	GTIN
CJ18DSLJZ	18V	C18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger	BM	4966376303953
CJ18DSLW4Z	18V	CJ18DSL (body only)	X	4966376304066

CV18DBL 18V Multi Tool



**BRUSH
LESS**
Brushless Motor

Specifications

Battery Voltage	18V
Oscillation Frequency:	
Standard Mode (Dial 1-5)	6000 - 20000/min
AUTO Mode (Dial A)	15000 - 20000/min
Oscillation Angle	3.2°
Overall Length	307 mm
Weight	2.0kg with BSL1850



Variant	Voltage	Contents	Case	GTIN
CV18DBLW4Z	18V	CV18DBL + pad + sanding paper + blades	X	4966376305865

CB18DBL 18V Bandsaw



**Li-ion
BRUSH
LESS**
Brushless Motor

Specifications

Max Cut Capacity: Round Pipe	83mm
Square Pipe (W x H)	80 x 80mm
Blade Speed: Standard Mode (1-5)	1.3-3.2m/s (80-195m/min)
Auto Mode (without load)	2.0m/s (120m/min)
Auto Mode (with load)	3.2m/s (195m/min)
Band Saw Blade Dimensions (L x W x T)	900 x 12.5 x 0.5mm
Dimensions (L x W x H)	413 x 173 x 266mm
Weight	3.6kg with BSL1850



Variant	Voltage	Contents	Case	GTIN
CB18DBLJ4Z	18V	CB18DBL + side handle + blade + wrench	X	4966376302352

CL14DSL 14.4V Stud Cutter



Specifications

Capacity:	
Threaded Stud Size	W3/8, W5/16, M10, M8, M6
Battery Voltage	18V
No Load Speed	30/min
Overall Length	283mm (11-9/64")
Weight	3.2kg (7.1lbs)



Variant	Voltage	Contents	Case	GTIN
CL14DSLJLZ	18V	CL14DSL + 2 x 3.0Ah Li-Ion batteries + UC18YFSL charger + M10 cutter set + M10 trimmer	BM	4966376304165

CL18DSL 18V Stud Cutter



Specifications

Capacity:	
Threaded Stud Size	W3/8, W5/16, M10, M8, M6
Battery Voltage	18V
No Load Speed	30/min
Overall Length	283mm (11-9/64")
Weight	3.2kg (7.1lbs)



Variant	Voltage	Contents	Case	GTIN
CL18DSLJLZ	18V	CL18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + M10 cutter set + M10 trimmer	BM	4966376304325

P18DSL
18V Planer



Specifications

Capacity: Cutting Width	82mm
Max Cutting Depth	2mm
Battery Voltage	18V
No Load Speed	16000/min
Overall Length	326mm
Weight	3.2kg



Variant	Voltage	Contents	Case	GTIN
P18DSLJZ	18V	P18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + blade setting gauge + guide + wrench	BM	4966376316830
P18DSLW4Z	18V	P18DSL + blade setting gauge + guide + wrench	X	4966376317004

CE18DSL
18V Shear



Specifications

Voltage	18V
Capacity:	
Steel	1.6mm (16ga.)
Stainless	1.2mm (18ga.)
Aluminium	2.3mm (13ga.)
Plate	
Min. Cutting Radius	25mm (1")
No Load Speed	5300/min
Overall Length	295mm (11-39/64") with BSL1850
Weight	2.2kg (4.9lbs.) with BSL1850



Variant	Voltage	Contents	Case	GTIN
CE18DSLJZ	18V	CE18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + blade set + thickness gauge	SC	4966376302451

CN18DSL
18V Nibbler



Specifications

Voltage	18V
Capacity:	
Steel	1.6mm (16ga.)
Stainless	1.2mm (18ga.)
Aluminium	2.3mm (13ga.)
Plate	
Min. Cutting Radius	40mm (1-9/16")
No Load Speed	2500/min
Overall Length	295mm (11-39/64") with BSL1850
Weight*2	2.1kg (4.6lbs.) with BSL1850
Standard Accessories*3	



Variant	Voltage	Contents	Case	GTIN
CN18DSLJZ	18V	CN18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger	SC	4966376304455

R18DSL
18V Wet/Dry Vacuum



Specifications

Battery Voltage	18V
Dust box Capacity	670ml
Overall Length	430mm
Weight	1.5kg

Variants

- **R18DSLW4Z** Brush nozzle + crevice nozzle

Variant	Voltage	Contents	Case	GTIN
R18DSLW4Z	18V	R18DSL + brush nozzle + crevice nozzle	X	4966376317349

Dust Extraction



Cordless & dustless
Easy pairing with a cordless tool

 **Bluetooth®**

Cordless Cleaner
RP3608DB



Cordless
Circular Saw
C3605DYA

All new Bluetooth® connectivity allows the cordless cleaner to automatically turn on or off when the connected tool starts or stops

RP3608DB

Multi Volt Cleaner with Bluetooth



NEW



Specifications

Usage	Dry only
Voltage	36V x 2
Bluetooth	Yes
Communication Distance	10m
Maximum Airflow	3.5m ³ /min
Maximum Vacuum	20.1kPa
Continuous Operating Time (2 x BSL36B18):	
Turbo	9 mins
Standard	33 mins
Eco	75 mins
Effective Dust Volume	8.0 litres
Dust Class	L
Hose Length	5.0m
Dimensions	331 x 369 x 382mm
Weight (inc battery)	10.5kg

Variant	Voltage	Contents	Case	GTIN
RP3608DBJ4Z	36V	RP3608DB + hose + adapter + 10 plastic bags	X	4966376328215

RP3608DA

Multi Volt Cleaner



NEW



Specifications

Usage	Wet/dry
Voltage	36V x 2
Bluetooth	No
Maximum Airflow	3.5m ³ /min
Maximum Vacuum	20.1kPa
Continuous Operating Time (2 x BSL36B18):	
Turbo	14 mins
Standard	52 mins
Eco	120 mins
Effective Dust Volume:	
Dry	8.0 litres
Wet	6.0 litres
Hose Length	1.5m
Dimensions	331 x 369 x 382mm
Weight (inc battery)	10.9kg

Variant	Voltage	Contents	Case	GTIN
RP3608DAW4Z	36V	RP3608DA + hose + pipe + floor cleaning accessory + 10 plastic bags	X	4966376324668

Cordless nailers



NR1890DC 18V Brushless Framing Nailer

Brushless motor

No fuel cells required

No air line or compressor

High driving power



5.0Ah
Li-ion

Specifications

Driving System	Air Spring
Nail Length	50mm to 90mm
Driving Speed	1.5 to 2nails/sec. (Intermittent)
Loading Capacity	47 nails
Firing Mode	Full sequential / Contact
Battery Voltage	18V
Dimensions (H x L x W)	342 x 309 x 127mm
Weight (Battery included)	4.8kg with BSL1850

Li-ion
BRUSHLESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
NR1890DCJPZ	18V	NR1890DC + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + safety glasses	SC	4966376327829
NR1890DCJ6Z	18V	NR1890DC + safety glasses	SC	4966376327812

NT1850DE
18V Brushless 18G Brad Nailer



Specifications

Driving System	Air Spring
Nail Length	16mm to 50mm
Driving Speed	3nails/sec. (Intermittent)
Loading Capacity	100nails (1 strip)
Firing Mode	Full sequential/ Contact (Selectable)
Battery Voltage	18V
Dimension (H x L x W)	323 x 298 x 104mm
Weight (Battery included)	3.3kg with BSL1830C



Variant	Voltage	Contents	Case	GTIN
NT1850DEJXZ	18V	NT1850DE + 2 x 3.0Ah Li-Ion batteries + UC18YFSL charger + nose cap + safety glasses	SC	4966376327881
NT1850DEJ4Z	18V	NT1850DE + nose cap + safety glasses		4966376327911

NT1865DM
18V Brushless 16G Finish Nailer



Specifications

Driving System	Air Spring
Nail Length	25mm to 65mm
Driving Speed	3nails/sec. (Intermittent)
Loading Capacity	100nails (2 strips)
Firing Mode*6	Full sequential/ Contact (Selectable)
Battery Voltage	18V
Dimension (H x L x W)	315 x 298 x 104mm
Weight (Battery included)	3.4kg with BSL1830C



Variant	Voltage	Contents	Case	GTIN
NT1865DMJXZ	18V	NT1865DM + 2 x 3.0Ah Li-Ion batteries + UC18YFSL charger + nose cap + safety glasses	SC	4966376327904
NT1865DMJ4Z	18V	NT1865DM + nose cap + safety glasses	X	4966376327935

NT1865DMA
18V Brushless 15G Finish Nailer



Specifications

Driving System	Air Spring
Nail Length	32mm to 65mm
Driving Speed	3nails/sec. (Intermittent)
Loading Capacity	100nails (1 strip)
Firing Mode*6	Full sequential/ Contact (Selectable)
Battery Voltage	18V
Dimension (H x L x W)	344 x 300 x 104mm
Weight (Battery included)*	3.5kg with BSL1830C



Variant	Voltage	Contents	Case	GTIN
NT1865DMAJXZ	18V	NT1865DMA + 2 x 3.0Ah Li-Ion batteries + UC18YFSL charger + nose cap + safety glasses	SC	4966376327898
NT1865DMAJ4Z	18V	NT1865DMA + nose cap + safety glasses		4966376327928

NH18DSL
18V Automatic Nailer



Specifications

Nail Length	25 - 90mm*
Nail Diameter	1.7 - 4.1mm*
Nail Head Diameter	4.4 - 8.7mm*
Impact Rate	4000/min
Driving Time	1.5 seconds*
Battery Voltage	18V
Head Height	113mm
Centre Height	17mm
Length	285mm
Weight (Battery included)	1.3kg with BSL1815
* Material: SPF	

Variant	Voltage	Contents	Case	GTIN
NH18DSLW4Z	18V	NH18DSL (body only)	X	4966376264391

UR18DSDL
DAB Site Radio



Specifications

Frequency Band: DAB/DAB+ 174.928 to 239.200MHz (BAND III)
 FM 87.5 to 108MHz
 AM 522 to 1629KHz
 Antenna: DAB/FM Rubber antenna
 AM Ferrite bar antenna (built-in)
 Bluetooth® Bluetooth Ver.4.0
 Bluetooth profile: A2DP (Advanced Audio Distribution Profile) / AVRCP (Audio Video Remote Control Profile)
 Send/Receive sensitivity: Class2
 Speaker (diameter) 90mm (8Ω) x 2
 Input Terminal AUX-IN (3.5mm)
 Output Terminal USB charging jack (5V 1A)
 Max Available Output AC: 5W x 2, 14.4V: 6W x 2, 18V: 7W x 2
 Power Supply: Slide Battery DC 14.4V, 18V
 Household Power Supply Using provided AC adapter
 Backup Batteries DC 3.0V, Two AA Batteries
 Dimensions (L x W x H) 405 x 312 x 265mm (with antenna retracted)
 Weight 4.0kg without battery

Variant	Voltage	Contents	Case	GTIN
UR18DSDLJ4Z	18V	UR18DSDL + mains adapter	X	4966376319626

UB18DA
LED Searchlight



Specifications

Battery Voltage 14.4V/18V/Multi Volt
 Maximum Output 2500 lumens
 Lighting Mode:
 Spot + Wide 2500 lumens
 Spot 1100 lumens
 Wide 1300 lumens
 Continuous Run Time*:
 Spot + Wide 3.0 hours
 Spot 6.0 hours
 Wide 5.8 hours
 Wide (Eco) 22.0 hours
 Dimensions (L x W x H) 203 x 280 x 204mm
 Weight 1.85kg
*using BSL1860

Variant	Voltage	Contents	Case	GTIN
UB18DAW4Z	18V	UB18DA (body only)	X	4966376328734

UB18DJL
LED Torch/ Work Light



Specifications

Battery Voltage 14.4V/18V/Multi Volt
 Torchlight:
 Brightness/ Measured distance 6000lx/1m
 LED lamp 1 x LED 3W
 Worklight:
 Brightness/ Measured distance High: 110lx/1m, Medium: 55lx/1m, Low 27lx/1m
 LED lamp 12 x LED 0.5W
 Dimensions (L x W x H) 205 x 78 x 108mm without battery
 Weight 0.3kg without battery

Variant	Voltage	Contents	Case	GTIN
UB18DJLL0Z	18V	UB18DJL (body only)	X	4966376317745

UB18DAL
Angle Head Torch



Specifications

For 18V slide Lithium-ion batteries
 Adjustable head
 Batteries not included

Variant	Voltage	Contents	Case	GTIN
UB18DALL0Z	18V	UB18DAL (body only)	X	4966376317585

UC18YTSL
4 port charger

NEW



Specifications

Charge Time per Battery (Rapid Charge):		
6.0Ah		38 mins
5.0Ah		32 mins
3.0Ah		20 mins
Charge Time Per Set of 4 Batteries (Simultaneous charge):		
6.0Ah		152 mins
5.0Ah		128 mins
3.0Ah		80 mins
USB output		2 sockets, 2A total
AC Output		8A
Operating Temperature		-10°C to 50°C

Variant	Voltage	Contents	Case	GTIN
UC18YTSLJ0Z	18V/36V	UC18YTSL	X	4966376330904

ET36A
Multi Volt Mains Adapter

NEW



Specifications

Compatible Tool Range	Multi Volt series
Input Supply	AC 230V
Output Voltage	36V
Peak Output Wattage	2kW
Cord Length	6.0m
Dimensions:	
Adapter	83 x 134 x 75mm
PFC Box	100 x 185 x 78mm
Weight (exc. cord):	
Adapter	0.8kg
PFC Box	1.2kg

Variant	Voltage	Contents	Case	GTIN
ET36AJ0Z	36V	ET36A	X	4966376324521

Model shown features International plug

BSL36A18
Multi Volt Battery



Specifications

Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah
Battery Level Indicator	4 stage
Cooling System	Yes
Dimensions (L x H x W)	116 x 69 x 76mm
Charging Time	Approx. 32 min* (when using the UC18YSL3)
Compatible Products:	18V All existing 18V slide-type tools 36V MULTI VOLT 36V tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

Variant	Voltage	Contents	Case	GTIN
BSL36A18J0Z	18V/36V	1 x BSL36A18	X	4549115156203

BSL36B18
Multi Volt Battery



Specifications

Voltage & Capacity	36V - 4.0Ah / 18V - 8.0Ah
Battery Level Indicator	4 stage
Cooling System	Yes
Dimensions (L x H x W)	134 x 75 x 83mm
Charging Time	Approx. 52 min (when using the UC18YSL3)
Compatible Products:	18V Existing 18V slide-type tools 36V MULTI VOLT 36V tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

Variant	Voltage	Contents	Case	GTIN
BSL36B18J0Z	18V/36V	1 x BSL36B18	X	4549115160651

CH3656DA

36V Hedgetrimmer



Multi Volt Battery

4 speed settings

Triple edged blade

Up to 62 mins run time

Li-ion

Specifications

Battery Voltage	36V
Blade:	
Length	620mm
Effective	560mm
Blade Pitch	35mm
Overall Length	1088mm
Weight	4.1kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
CH3656DAJLZ	18V	CH3656 + 1 x Multi Volt battery + UC18YSL3 charger + blade cover	X	4966376303465
CH3656DAJ4Z	18V	CH3656 + blade cover	X	4966376303458

CS3630DA

36V Top Handle Chainsaw



Specifications

Battery Voltage	36V
Guide Bar Length	300mm
Chain Speed	8.3m/s
Type of Guide Bar	P012-50CR
Chain Pitch	9.5mm
Overall Length	599mm
Weight	4.3 kg with BSL36A18

Li-ion



NOTE: TOP HANDLE CHAINSAWS ARE FOR USE BY TRAINED ARBORISTS ONLY

Variant	Voltage	Contents	Case	GTIN
CS3630DAJLZ	18V	CS3630DA + 1 x Multi Volt battery + UC18YSL3 charger + bar cover + chain oil + wrench	X	4966376305384
CS3630DAJ4Z	18V	CS3630DA + bar cover + chain oil + wrench	X	4966376305377

CG36DA (loop handle)

36V Grass Trimmer



Specifications

Battery Voltage	36V
Cutting Capacity Dia.	310mm
No Load Speed of Trimmer	5800 - 7000/min
Overall Length	1885mm
Weight	5.6kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
CG36DAJZ	18V	CG36DA + 1 x Multi Volt battery + UC18YSL3 charger + harness + safety glasses + wrenches	X	4966376302864
CG36DAJ4Z	18V	CG36DA + harness + safety glasses + wrenches	X	4966376302840

CG36DA (bike handle)

36V Grass Trimmer



Specifications

Battery Voltage	36V
Cutting Capacity Dia.	310mm (12")
No Load Speed of Trimmer	5800 - 7000/min
Overall Length	1885mm (74")
Weight	5.8kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
CG36DAJEZ	18V	CG36DA + 1 x Multi Volt battery + UC18YSL3 charger + harness + safety glasses + wrenches	X	4966376302871
CG36DAJ5Z	18V	CG36DA + harness + safety glasses + wrenches	X	4966376302857

RB36DA

36V Blower



Specifications

Battery Voltage	36V
Air Volume	680m ³ /h (800m ³ /h in turbo mode)
Air Velocity	45m/s (53m/s in turbo mode)
Overall Length	940mm
Weight	3.5kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
RB36DAJLZ	18V	RB36DA + 1 x Multi Volt battery + UC18YSL3 charger + nozzle	X	4966376317493
RB36DAJ4Z	18V	RB36DA + nozzle	X	4966376317486

KC18DGL

18V 2 pce Cordless Kit



Specifications

DV18DGL combi drill
WH18DGL impact driver
Injection moulded case

Li-ion

Variant	Voltage	Contents	Case	GTIN
KC18DGLJEZ	18V	DV18DGL + WH18DGL + 2 x 5.0Ah Li-Ion batteries + UC18YKSL charger	IM	4966376315499

Driver bits not included

KC18DBFL2

18V 2 pce Brushless Cordless Kit



Specifications

DV18DBFL2 combi drill
WH18DBFL2 impact driver

Li-ion
BRUSH
LESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
KC18DBFL2JAZ	18V	DV18DBFL2 + WH18DBFL2 + 2 x 5.0Ah batteries + UC18YFSL charger	IM	4966376315291
KC18DBFL2JCZ	18V	DV18DBFL2 + WH18DBFL2 + 2 x 3.0Ah batteries + UC18YFSL charger	SC	4966376315307

Driver bits not included

KC18DKL

18V 2 pce Cordless Kit



Specifications

DV18DSDL combi drill
WH18DSAL impact driver

Li-ion

Variant	Voltage	Contents	Case	GTIN
KC18DKLJBZ	18V	DV18DSDL + WH18DSAL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger	IM	4966376315581

Driver bits not included

KC18DPL2

18V 2 pce Brushless Cordless Kit



Specifications

DV18DBXL combi drill
WH18DBDL2 impact driver

Li-ion
BRUSH
LESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
KC18DPL2JAZ	18V	DV18DBXL + WH18DBDL2 + 2 x 6.0Ah Li-Ion batteries + UC18YSL3 charger	SC	5017658062590

Driver bits not included

KC18DPL2

18V 2 pce Brushless Cordless Kit

Li-ion
BRUSH
LESS
Brushless Motor



Specifications

DV18DBXL combi drill
WR18DBDL2 impact wrench

Variant	Voltage	Contents	Case	GTIN
KC18DPL2JBZ	18V	DV18DBXL + WR18DBDL2 + 2 x 6.0Ah Li-ion batteries + UC18YSL3 charger	SC	5017658062606

Socket not included

KTL318G

18V 3 pce Cordless Kit

Li-ion



Specifications

DV18DGL combi drill
G18DSL angle grinder
UB18DAL torch

Variant	Voltage	Contents	Case	GTIN
KTL318GJMZ	18V	DV18DGL + G18DSL + UB18DAL + 2 x 3.0Ah Li-ion batteries + UC18YFSL charger	IM (drill)	5017658062613

Socket not included

KTL318WG

3 pce Cordless Kit

Li-ion



Specifications

WR18DSDL impact wrench
G18DSL angle grinder
UB18DAL torch

Variant	Voltage	Contents	GTIN
KTL318WGJZ	18V	WH18DSDL + G18DSL + UB18DAL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	5017658062620

Socket not included

KTL318WH2

3 pce Cordless Kit



Specifications

DV18DSDL combi drill
WH18DSAL impact driver
WH18DGL impact driver

Li-ion

Variant	Voltage	Contents	GTIN
KTL318WH2Z	18V	DV18DSDL + WH18DSAL + WH18DGL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	5017658062637

Driver bits not included

KTL436MV

4 pce Multi Volt Cordless Kit



NEW

BRUSH LESS
Brushless Motor



Specifications

DV36DAX combi drill
WH36DB IP56 impact driver
G3613DB angle grinder
CR36DA reciprocating saw

Variant	Voltage	Contents	Case	GTIN
KTL436MV	18V	CR36DA + DV36DAX + WH36DB + G3613DB + 2 X Multi Volt batteries + UC18YSL3 charger	SC (drill)	5017658062637

Driver bits not included

KTL618BL2

6 pce Brushless Cordless Kit



Li-ion
BRUSH LESS
Brushless Motor

Specifications

DV18DBXL combi drill
WH18DBDL2 impact driver
C18DBAL circular saw
G18DBAL angle grinder
CV18DBL multi tool
UB18DJL torch/work light

Variant	Voltage	Contents	GTIN
KTL618BL2	18V	DV18DBXL + WH18DBDL2 + C18DBAL + G18DBAL + CV18DBL + UB18DJL + 2 x 6.0Ah Li-ion batteries + UC18YSL3 charger + tool bag	5017658062644

Driver bits not included

KTL618S2

6 pce Cordless Kit



Li-ion

Specifications

DV18DSDL combi drill
WH18DSAL impact driver
C18DSL circular saw
CR18DSL reciprocating saw
G18DSL angle grinder
UB18DJL torch/work light

Variant	Voltage	Contents	GTIN
KTL618S2JJ3Z	18V	DV18DSDL + WH18DSAL + C18DSL + CR18DSL + G18DSL + UB18DJL + 3 x 5.0Ah Li-ion batteries + UC18YFSL charger + tool bag	5017658062651

Driver bits not included

KTL618SJ2
6 pce Cordless Kit

Li-ion



Specifications

DV18DSDL combi drill
WH18DSAL impact driver
C18DSL circular saw
CJ18DSL jigsaw
G18DSL angle grinder
UB18DJL torch/work light

Variant	Voltage	Contents	GTIN
KTL618SJ2JJ3Z	18V	DV18DSDL + WH18DSAL + C18DSL + CJ18DSL + G18DSL + UB18DJL + 3 x 5.0Ah Li-ion batteries + UC18YFSL charger + tool bag	5017658062668

Socket not included

KTL818BL2
8 pce Brushless Cordless Kit

Li-ion
BRUSHLESS
Brushless Motor



Specifications

DV18DBXL combi drill
WH18DBDL2 impact driver
DH18DBL SDS-Plus hammer drill
C18DBAL circular saw
G18DBAL angle grinder
CV18DBL multi tool
CR18DBL reciprocating saw
UB18DJL torch/work light

Variant	Voltage	Contents	GTIN
KTL818BL2JAZ	18V	DV18DBXL + WH18DBDL2 + C18DBAL + G18DBAL + DH18DBL + CV18DBL + CR18DBL + UB18DJL + 2 x 6.0Ah Li-ion batteries + UC18YSL3 charger + tool bag	5017658062675

Driver bits not included

KTL918S2
9 pce Cordless Kit

Li-ion



Specifications

DV18DSDL combi drill
WH18DSAL impact driver
C18DSL circular saw
DH18DSL SDS-Plus hammer drill
CJ18DSL jigsaw
CR18DSL reciprocating saw
G18DSL angle grinder
R18DSL wet/dry vacuum
UB18DJL torch/work light

Variant	Voltage	Contents	GTIN
KTL918S2JJ3Z	18V	DV18DSDL + WH18DSAL + C18DSL + CJ18DSL + DH18DSL + G18DSL + CR18DSL + R18DSL + UB18DJL + 3 x 5.0Ah Li-ion batteries + UC18YFSL charger + tool bag	5017658062682

Driver bits not included

KTN218S
2 pce Nailer Kit

Li-ion



Specifications

NR1890DC cordless framing nailer
NT1865DM cordless 16G finish nailer
2 x stackable cases

Variant	Voltage	Contents	Case	GTIN
KTN218SJJZ	18V	NR1890DC + NT1865DM + safety glasses + nose cap + wrenches + 2 x 5.0Ah Li-ion batteries + UC18YSL3 charger	SC	5017658062699

BSL18UA

Battery Adapter



Specifications

Battery Voltage	14.4/18V Li-ion battery
Output Port	USB output x 2 (5V, total 2A), DC12V output x 1 (2A)
Battery Over discharge Protection	Yes
Auto Power-off Time	120 minutes
Dimensions (L x W x H):	
Without battery	92 x 75 x 56mm
with BSL1850	117 x 80 x 102mm
Weight	150g

Suitable for use with UJ1810DA jacket

USB output for phone charging

Variant	Voltage	Contents	GTIN
BSL18UAW6Z	14.4V/18V	BSL18UA(S) (body only)	4966376301669

HSC1/2/3/4

Stackable Case System

- Fully stackable and interlocking system
- Cases can be stacked in any order or configuration
- Optional wheeled trolley platform
- Optional insert boxes for HSC1, perfect for screws, nuts, bolts and other small loose items
- Optional moulded trays to fit a wide variety of HIKOKI mains and cordless tools



HSC4
295 x 395 x 315mm



HSC3
295 x 395 x 210mm



HSC2
295 x 395 x 158mm



HSC1
295 x 395 x 101mm



Castor Assembly

Part no	Description	Suitable for	Fits
402544	HSC1 - empty case with upper foam lining	General use	
402545	HSC2 - empty case with upper foam lining	General use	
402546	HSC3 - empty case with upper foam lining	General use	
402547	HSC4 - empty case with upper foam lining	General use	
402538	HSC1 with 3 boxes	Storage of small items	
402539	HSC2 with upper & lower foam lining	General use	
402540	HSC3 with upper & lower foam lining	General use	
402541	HSC4 with upper & lower foam lining	General use	
402543	Castor Tray	Transport	HSC1/2/3/4
402542	Organiser tray with 3 partitions	Storage of small items	HSC1
337746	Inner tray	General use	HSC1
336475	Plastic tray for 14/18V drill driver/combi/impact	All DS/DV/WH/WR series	HSC2
339776	Plastic tray for Multi Volt drill driver/combi drill	DS36DAX/DV36DAX	HSC2
336644	Plastic tray for 10.8V drill driver drill/impact driver	10.8V tools	HSC1
337740	Plastic tray for jigsaw	CJ110MV	HSC1
337741	Plastic tray for 2kg hammer drill	2kg hammers	HSC1
337764	Plastic tray for palm sander	SV13YA	HSC2
337114	Plastic tray for cordless hammer drill	DH18DSL	HSC2
337110	Plastic tray for cordless jigsaw, bottom for battery & charger	CJ18DSL	HSC3
337111	Plastic tray for cordless Jigsaw, upper for machine	CJ18DSL	HSC3
337112	Plastic tray for cordless screwdriver	WF18DSL	HSC3
337937	Plastic tray for multi tool	CV18DBL	HSC2
337288	Plastic tray for cordless corner drill	DN18DSL	HSC2
337113	Plastic tray for cordless grinder	G18DSL	HSC3
338872	Plastic tray for brushless grinder	G18DBAL	HSC3
370370	Plastic tray for Multi Volt grinder	G3612DA/G3613DB	HSC3
339368	Plastic tray for 2 pce drill/impact driver kit	Most 18V drills & impact drivers	HSC3
373646	Plastic tray for 185mm Multi Volt circular saw	C3607DA	HSC4
337742	Sponge tray for planer	P20SF/P18DSL	HSC3
337109	Sponge tray for cordless high-torque impact wrench	WR18DShL	HSC3
337658	Sponge tray for circular saw	C7UY only	HSC4
337659	Sponge tray for circular saw	C6BU2/C7U2/C7BU2	HSC4
337529	Sponge tray for cordless circular saw	C18DSL	HSC4
373135	Spong tray for Multi Volt SDS hammer drill	DH36DPA	HSC4
373138	Sponge tray for 165mm Multi Volt circular saw	C3606DA	HSC4
373223	Sponge tray for Multi Volt impact wrench	WR36DA/WR36DB	HSC3
337763	Sponge tray for router	M8V2	HSC2
370331	Sponge tray for brushless hammer drill/framing nailer	DH18DBL/NR1890DBCL	HSC4
371895	Sponge tray for finish nailer	NT1850DBSL/NT1865DBSL/ NT1865DBAL	HSC4
336472	Latch (C217817)	Spare	HSC1/2/3/4
336473	Handle (C112759)	Spare	HSC1/2/3/4
336474	Hinge (C345573)	Spare	HSC1/2/3/4
337743	Castor Latch	Spare for Castor Tray	402543
337744	Castor(A) w/o stopper	Spare for Castor Tray	402543
337745	Castor(B) with stopper	Spare for Castor Tray	402543

The HSC case range are covered by the standard 12 month warranty only

Mains Powered Tools



D6SH
6mm Rotary Drill



Specifications

Chuck Capacity	0.5 – 6.5mm
Capacity: Steel	6.5mm
Wood	9mm
Power Input	240W
No Load Speed	4500/min
Overall Length	206mm
Weight	0.9kg



Variant	Voltage	Contents	Case	GTIN
D6SHJ1Z	230V	D6SH + depth stop + chuck key	X	4966376271436
D6SHJ2Z	110V	D6SH + depth stop + chuck key	X	4966376271443

D10VC3
10mm Rotary Drill



Specifications

Drill Chuck Capacity	10mm
Capacity:	
Steel (Twist Bit)	10mm
Wood (Flat Spade Bit)	32mm
Power Input	600W
No Load Speed	0 - 2500/min
Overall Length	242mm
Weight	1.4kg



Variant	Voltage	Contents	Case	GTIN
D10VC3J6Z	230V	D10VC3 (tool only)	X	4966376270064
D10VC3J7Z	110V	D10VC3 (tool only)	X	4966376270071

D10VF
10mm Rotary Drill



Specifications

Chuck Capacity	0.8–10mm
Capacity: Chuck	
Steel Twist Bit:	10mm
Wood Flat Bit:	25mm
Hole Saw:	29mm
Power Input	710W
No Load Speed	0–3000/min
Overall Length	265mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
D10VFJ6Z	230V	D10VF (tool only)	BM	4966376270125
D10VFJ7Z	110V	D10VF (tool only)	BM	4966376270132

D13VF
13mm Rotary Drill



Specifications

Chuck Capacity	1.5–13mm
Capacity:	
Steel Twist Bit:	13mm
Hole Saw:	50mm
Wood Auger Bit:	32mm
Hole Saw:	102mm
Power Input	710W
No Load Speed	0–850/min
Overall Length	290mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
D13VFJ6Z	230V	D13VF + side handle	BM	4966376270873
D13VFJ7Z	110V	D13VF + side handle	BM	4966376270880

D13 13mm Rotary Drill



Specifications

Chuck Capacity	1.5 - 13mm
Capacity: Steel	13mm
Wood	40mm
Power Input	720W
No Load Speed	550/min
Overall Length	378mm
Weight	3.0kg
	None



Variant	Voltage	Contents	Case	GTIN
D13J1Z	230V	D13 + side handle + chuck key	X	4966376270699
D13J2Z	110V	D13 + side handle + chuck key	X	4966376270705

FDV16VB2 16mm Impact Drill



Specifications

Drill Chuck	1.5-13mm
Capacity: Brick	16mm
Steel	13mm
Wood	25mm
Power Input	550W
No Load Speed	0-2900/min
Full Load Impact Rate	27360/min
Overall Length	289mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
FDV16VB2J1Z	230V	FDV16VB2 + side handle + depth stop	BM	4966376298358
FDV16VB2J2Z	110V	FDV16VB2 + side handle + depth stop	BM	4966376298365

DV16V 16mm Impact Drill



Specifications

Drill Chuck	1.5-13mm
Capacity: Concrete	16mm
Steel	13mm
Power Input	590W
No Load Speed	0-2900/min
Full Load Impact Rate	34500/min
Overall Length	269mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
DV16VJ6Z	230V	DV16V + side handle + depth stop	BM	4966376286317
DV16VJ7Z	110V	DV16V + side handle + depth stop	BM	4966376286324

Drill bit not included

DV18V 18mm Impact Drill



Specifications

Drill Chuck	1.5-13mm
Capacity: Concrete	18mm
Steel	13mm
Power Input	690W
No Load Speed	0-1000/0-3000/min
Full Load Impact Rate	8400/27300/min
Overall Length	333mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
DV18VJ6Z	230V	DV18V + side handle + depth stop	IM	4966376287024
DV18VJ7Z	110V	DV18V + side handle + depth stop	IM	4966376287031

Drill bit not included

DV20VD

20mm Impact Drill

Aluminium housing body

Powerful 860W motor

Brush rotation system

Double moulded handle



FHB
FLUORHAUTHERODUR

Specifications

Drill Chuck	1.5-13mm
Capacity: Concrete	20mm
Steel	13mm
Wood	40mm
Power Input	860W
No Load Speed	0-1100/3000/min
Full Load Impact Rate	8100/22000/min
Overall Length	363mm
Weight	3.0kg
Case	

Variant	Voltage	Contents	GTIN
DV20VDJ6Z	230V	DV20VD + side handle + depth stop	4966376287468
DV20VDJ7Z	110V	DV20VD + side handle + depth stop	4966376287475



Drill bit not included

DV20VB2

20mm Impact Drill



Specifications

Drill Chuck	1.5-13mm
Capacity: Concrete	20mm
Steel	13mm
Wood	40mm
Power Input	790W
No Load Speed	0-1000/3000/min
Full Load Impact Rate	0-13000/39000/min
Overall Length	333mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
DV20VB2J6Z	230V	DV20VB2 + side handle + depth stop	IM	4966376287291
DV20VB2J7Z	110V	DV20VB2 + side handle + depth stop	IM	4966376287307

Drill bit not included

DH24PX2

24mm SDS-Plus Rotary Hammer Drill

NEW



Variant	Voltage	Contents	Case	GTIN
DH24PX2J1Z	230V	DH24PX2 + side handle + depth stop	IM	4966376328574
DH24PX2J2Z	110V	DH24PX2 + side handle + depth stop	IM	4966376328574

Drill bit not included

Specifications

Capacity:	
Concrete:	Drill Bit 3.4 - 24mm Core Bit 25 - 50mm
Mild Steel	13mm
Wood	32mm
Power Input	730W
Impact Energy	2.7 Joules
Bit Shank	SDS-plus
No Load Speed	0 - 1050/min
Full Load Impact Rate	0 - 3950/min
Overall Length	349mm
Weight	2.8kg



DH26PX

26mm SDS-Plus Rotary Hammer Drill



Variant	Voltage	Contents	Case	GTIN
DH26PXJ1Z	230V	DH26PX + side handle + depth stop	IM	4966376283620
DH26PXJ2Z	110V	DH26PX + side handle + depth stop	IM	4966376283637

Drill bit not included

Specifications

Capacity:	
Concrete:	Drill Bit 3.4-26mm Core Bit 25-50mm
Mild Steel	13mm
Wood	32mm
Power Input	830W
Impact Energy	3.2J
Bit Shank	SDS-plus
No Load Speed	0-1100/min
Full Load Impact Rate	0-4300/min
Overall Length	367mm
Weight	2.8kg



DH28PX

28mm SDS-Plus Rotary Hammer Drill

UVP
USER VIBRATION PROTECTION



Variant	Voltage	Contents	Case	GTIN
DH28PXJ1Z	230V	DH28PX + side handle + depth stop	IM	4966376284351
DH28PXJ2Z	110V	DH28PX + side handle + depth stop	IM	4966376284368

Drill bit not included

Specifications

Capacity:	
Concrete:	Drill Bit 3.4-28mm Core Bit 25-50mm
Mild Steel	13mm
Wood	32mm
Power Input	850W
Impact Energy	3.4J
Bit Shank	SDS-plus
No Load Speed	0-1100/min
Full Load Impact Rate	0-4300/min
Overall Length	367mm
Weight	2.9kg



DH28PC

28mm SDS-Plus Rotary Hammer Drill



Variant	Voltage	Contents	Case	GTIN
DH28PCJ2Z	110V	DH28PC + side handle + depth stop	IM	4966376283958

Drill bit not included

Specifications

Capacity: Concrete:	Drill Bit 28mm Core Bit 80mm
Mild Steel	13mm
Wood	32mm
Power Input	720W
Impact Energy	3.5J
Bit Shank	SDS-plus
No Load Speed	0-1050/min
Full Load Impact Rate	0-4000/min
Overall Length	316mm
Weight	3.5kg



DH40MC

40mm SDS-Max Rotary Demolition Hammer



Specifications

Capacity in concrete:	
Drill Bit	40mm
Core Bit	105mm
Power Input	1100W
Bit Shank	SDS max
No Load Speed	620/min
Full Load Impact Rate	2800/min
Overall Length	448mm
Weight	7.1kg



Variant	Voltage	Contents	Case	GTIN
DH40MCJ1Z	230V	DH40MC + side handle + depth stop + grease	IM	4966376284580
DH40MCJ2Z	110V	DH40MC + side handle + depth stop + grease	IM	4966376284597

Drill bit not included

DH40MEY

40mm SDS-Max Rotary Demolition Hammer



Specifications

Capacity in concrete:	
Drill Bit	40mm
Core Bit	105mm
Power Input	1150W
Impact Energy	11.0J
Bit Shank	SDS max
No Load Speed	250-500/min
Full Load Impact Rate	1430-2850/min
Overall Length	477mm
Weight	7.5kg



Variant	Voltage	Contents	Case	GTIN
DH40MEY1Z	230V	DH40MEY + side handle + depth stop + grease	IM	4966376284702
DH40MEY2Z	110V	DH40MEY + side handle + depth stop + grease	IM	4966376284719

Drill bit not included

DH45ME

45mm SDS-Max Rotary Demolition Hammer



Specifications

Capacity in Concrete:	
Drill Bit	45mm
Core Bit	125mm
Power Input	1500W
Bit Shank	SDS max
Impact Energy	13.4J
No Load Speed:	
110V	120-270/min
230V	120-310/min
Full Load Impact Rate:	
110V	1200-2500/min
230V	1200-2950/min
Overall Length	535mm
Weight	9.0kg



Variant	Voltage	Contents	Case	GTIN
DH45MEJ1Z	230V	DH45ME + side handle + depth stop + grease	IM	4966376284832
DH45MEJ2Z	110V	DH45ME + side handle + depth stop + grease	IM	4966376284849

Drill bit not included

DH52ME

52mm SDS-Max Rotary Demolition Hammer



Specifications

Capacity in Concrete:	
Drill Bit	52mm
Core Bit	160mm
Power Input	1500W
Bit Shank	SDS max
Impact Energy	22.0J
No Load Speed:	
110V	110-260/min
230V	110-280/min
Full Load Impact Rate:	
110V	1000-2200/min
230V	1000-2400/min
Overall Length	585mm
Weight	11.0kg



Variant	Voltage	Contents	Case	GTIN
DH52MEJ1Z	230V	DH52ME + side handle + depth stop + grease	IM	4966376285129
DH52MEJ2Z	110V	DH52ME + side handle + depth stop + grease	IM	4966376285136

Drill bit not included

NEW

Lightweight design

Low vibration handle

High demolition performance

H41MB2
SDS-Max Demolition Hammer

Power Input 950W
Full Load Impact Rate 3000/min
Impact Energy 7.0 Joules
Bit Shank SDS-Max
Overall Length 427mm
Weight 5.24kg



Variant	Voltage	Contents	Case	GTIN
H41MB2J1Z	230V	H41MB2 + bull point + side handle	IM	4966376267750
H41MB2J2Z	110V	H41MB2 + bull point + side handle	IM	4966376267767



H45MEY
SDS-Max Demolition Hammer

AC Brushless
BRUSH LESS
Brushless Motor

AHB
ALUMINUM HOUSING BODY

UVP
USER VIBRATION PROTECTION



Specifications

Power Input 1150W
Full Load Impact Rate 1430 – 2850/min
Impact Energy 8.5 Joules
Bit Shank SDS max
Overall Length 480mm
Weight 7.3kg



Variant	Voltage	Contents	Case	GTIN
H45MEYJ1Z	230V	H45MEY + bull point + side handle	IM	4966376288175
H45MEYJ2Z	110V	H45MEY + bull point + side handle	IM	4966376288182

H60MC
SDS-Max Demolition Hammer

AHB
ALUMINUM HOUSING BODY



Specifications

Power Input 1250W
Full Load Impact Rate 1600/min
Impact Energy 22 Joules
Bit Shank SDS max
Overall Length 570mm
Weight 10.2kg



Variant	Voltage	Contents	Case	GTIN
H60MCJ1Z	230V	H60MC + bull point + side handle	BM	4966376288427
H60MCJ2Z	110V	H60MC + bull point + side handle	BM	4966376288434

H60MEY
SDS-Max Demolition Hammer



Power Input 1500W
Full Load Impact Rate 1500 – 2100/min
Impact Energy 20 Joules
Bit Shank SDS max
Overall Length 585mm
Weight 12.2kg



Variant	Voltage	Contents	Case	GTIN
H60MEYJ1Z	230V	H60MEY + bull point + side handle	IM	4966376288670
H60MEYJ2Z	110V	H60MEY + bull point + side handle	IM	4966376288687

H65SD3
28mm Demolition Hammer



Power Input 1340W
Full Load Impact Rate 1400/min
Impact Energy 28 Joules
Bit Shank 28.5mm Hex
Overall Length 848mm
Weight 20.1kg



Variant	Voltage	Contents	Case	GTIN
H65SD3J2Z	110V	H60SD3 + side handle	BM	4966376288939

Point not included

H90SG
28.5mm Demolition Hammer



Specifications

Power Input 1560W
Full Load Impact Rate 1000/min
Impact Energy 70 Joules
Bit Shank 28.5mm Hex
Overall Length 860mm
Weight 32.0kg



Variant	Voltage	Contents	Case	GTIN
H90SGJ2Z	110V	H90SG + wrench	X	4966376289080

Point not included

W6VB3

6mm Screwdriver



Specifications

Capacity: Drywall Screw	6mm
Self-Drilling Screw	6mm
Wood Screw (D x L)	5.8 x 50mm
Bit Shank	6.35mm (¼") hex
Power Input	620W
No Load Speed	0 – 2600/min
Overall Length	312mm
Weight	1.5kg
Case	None



Variant	Voltage	Contents	Case	GTIN
W6VB3J2Z	110V	W6VB3 + Magnetic bit holder + sub stopper	X	4966376280681

W8VB2

8mm Screwdriver



Specifications

Capacity: Drywall Screw	6mm
Self-Drilling Screw	8mm
Wood Screw (D x L)	6.2 x 50mm
Bit Shank	6.35mm (¼") Hex
Power Input	620W
No Load Speed	0 – 1700/min
Overall Length	312mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
W8VB2J2Z	110V	W8VB2 + Magnetic bit holder + sub stopper	X	4966376280841

WR16SE

16mm Impact Wrench



Specifications

Capacity: Ordinary Bolt	12 - 22mm
High Tension Bolt	12 - 16mm
Tightening Torque	360Nm
Square Drive	12.7mm (½")
Power Input	370W
No Load Speed: Max	1600/min
High	1400/min
Mid	1300/min
Low	1100/min
Impact Rate: Max	1900/min
High	1700/min
Mid	1500/min
Low	1300/min
Overall Length	228mm
Weight	2.5kg



AC Brushless
BRUSH
LESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
WR16SEJ1Z	230V	WR16SE (tool only)	X	4966376289851
WR16SEJ2Z	110V	WR16SE(tool only)	X	4966376289868

Socket not included

WR22SE

22mm Impact Wrench



Specifications

Capacity: Ordinary Bolt	14 - 24mm
High Tension Bolt	16 - 22mm
Tightening Torque	620Nm
Square Drive	19mm (3/4")
Power Input	800W
No Load Speed	1400/min
Impact Rate	2000/min
Overall Length	280mm
Weight	4.6kg



Variant	Voltage	Contents	Case	GTIN
WR22SEJ1Z	230V	WR22SE + side handle	IM	4966376290048
WR22SEJ2Z	110V	WR22SE + side handle	IM	4966376290055

Socket not included

Brushless Motor

Aluminium housing body

1000Nm hard torque

Soft grip handles

WR25SE

25mm Brushless Impact Wrench



Specifications

Capacity: Ordinary Bolt	22 - 30mm
High Tension Bolt	22 - 24mm
Tightening Torque	1000Nm
Square Drive	25.4mm (1")
Power Input	900W
No Load Speed	1100/min
Impact Rate	1500/min
Overall Length	340mm
Weight	7.7kg



Variant	Voltage	Contents	Case	GTIN
WR25SEJ1Z	230V	WR26SE + side handle	IM	4966376290239
WR25SEJ2Z	110V	WR26SE + side handle	IM	4966376290246

Socket not included

C7ST 185mm Circular Saw



Specifications

Capacity: Blade Dia.	185mm
Max Cut Depth: 90°	62mm
45°	47.5mm
Bevel Capacity	0-45°
Power Input	1710W
No Load Speed	6000/min
Overall Length	310mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
C7STJ1Z	230V	C7ST + guide + wrench	BM	4966376292578
C7STJ2Z	110V	C7ST + guide + wrench	BM	4966376292585

C7SB3 185mm Circular Saw



Specifications

Capacity: Blade Dia.	185mm
Max Cut Depth: 90°	62mm
45°	47.5mm
Power Input	1710W (110V:1670W)
No Load Speed	6000/min
Overall Length	308mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
C7SB3J1Z	230V	C7SB3 + guide + dust adapter + wrench + short lever	BM	4966376292158
C7SB3J2Z	110V	C7SB3 + guide + dust adapter + wrench + short lever	BM	4966376292165

C7UR 185mm Circular Saw



Specifications

Capacity: Blade Dia.	185mm
Max Cut Depth: 90°	60mm
45°	47mm
Power Input	1800W (110V:1670W)
No Load Speed	6800/min
Overall Length	308mm
Weight	5.1kg



Variant	Voltage	Contents	Case	GTIN
C7URJ1Z	230V	C7UR + guide + dust adapter + wrench + short lever	BM	4966376292752
C7URJ2Z	110V	C7UR + guide + dust adapter + wrench + short lever	BM	4966376292769

C7U3 190mm Circular Saw



Specifications

Capacity: Blade Dia.	190mm
Max Cut Depth: 90°	66mm
45°	48mm
Power Input	1300W (110V:1200W)
No Load Speed	5800/min
Overall Length	314mm
Weight	4.7kg



Variant	Voltage	Contents	Case	GTIN
C7U3J6Z	230V	C7U3 + guide + dust adapter + wrench + short lever	BM	4966376292653
C7U3J7Z	110V	C7U3 + guide + dust adapter + wrench + short lever	BM	4966376292660

C9U3 235mm Circular Saw



Specifications

Capacity: Blade Dia.	235mm
Max Cut Depth: 90°	86mm
45°	65mm
Power Input	2000W (110V:1670W)
No Load Speed	5200/min
Overall Length	397mm
Weight	7.2kg



Variant	Voltage	Contents	Case	GTIN
C9U3J6Z	230V	C9U3 + guide + dust adapter + wrench + short lever	BM	4966376293469
C9U3J7Z	110V	C9U3 + guide + dust adapter + wrench + short lever	BM	4966376293476

CJ90VST Jigsaw



Specifications

Capacity:	
Wood	90mm
Mild Steel Plate	8mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Power Input	705W
Length of Stroke	20mm
No-Load Speed(stroke)	850 - 3000/min
Overall Length	228mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
CJ90VSTJ1Z	230V	CJ90VST + blade + wrench	BM	4966376294152
CJ90VSTJ2Z	110V	CJ90VST + blade + wrench	BM	4966376294169

CJ110MV Jigsaw



Specifications

Capacity: Wood	110 mm
Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Power Input	720W
Length of Stroke	26mm
No-Load Speed(stroke)	850 - 3000/min
Overall Length	246mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
CJ110MVJ1Z	230V	CJ110MV + blade + splinter guard + chip cover + dust adapter	BM	4966376294152
CJ110MVJ2Z	110V	CJ110MV + blade + splinter guard + chip cover + dust adapter	BM	4966376294169

CJ160V Jigsaw



Specifications

Capacity: Wood	160mm
Aluminium	20mm
Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Power Input	800W
Length of Stroke	26mm
No-Load Speed (stroke)	800 -2800/min
Overall Length	249mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
CJ160VJ1Z	230V	CJ160V + 3 blades + sub base + splinter guard + chip cover + dust adapter + wrench	BM	4966376293841
CJ160VJ2Z	110V	CJ160V + 3 blades + sub base + splinter guard + chip cover + dust adapter + wrench	BM	4966376293858

C10FCE2 255mm Compound Mitre Saw



Variant	Voltage	Contents	Case	GTIN
C10FCE2J1Z	230V	C10FCE2 + dust bag + vice assembly + sub fence + wrench	X	4966376290451
C10FCE2J2Z	110V	C10FCE2 + dust bag + vice assembly + sub fence + wrench	X	4966376290468

Specifications

Capacity:	255mm
Blade Dia.	255mm
(H x W) Cross Cut: 0°	59 x 144mm or 89 x 101mm
Mitre Cut: 45°	59 x 102mm or 89 x 70mm
Mitre Cut: 52°	59 x 89mm or 89 x 54mm
Bevel Cut: 45°	41 x 144mm
Compound: Mitre 45° and Bevel 45°	41 x 102mm
Power Input	1520W
No Load Speed	5000/min
Mitre Angle: Right	0 – 52°
Left	0 – 52°
Bevel Angle: Left	0 – 45°
Positive Mitre Angle Stop	0, 15, 22.5, 31.6 and 45°
Dimensions	460 x 628 x 561mm
Weight	11.9kg



110V **999038** 230V **999065**

C8FSE 216mm Slide Compound Mitre Saw



Variant	Voltage	Contents	Case	GTIN
C8FSEJRZ	230V	C8FSE + dust bag + vice assembly + wrench	X	4966376293100
C8FSEJSZ	110V	C8FSE + dust bag + vice assembly + wrench	X	4966376293117

Specifications

Capacity:	216mm
Blade Dia.	216mm
(H x W) Cross Cut: 0°	65 x 312mm
Mitre Cut: 45°	65 x 220mm
Bevel Cut: 45°	45 x 312mm
Compound: Mitre 45° and Bevel 45°	45 x 220mm
Power Input	1050W
No Load Speed	5500/min
Mitre Angle: Right	0 – 57°
Left	0 – 45°
Bevel Angle: Right	0 – 5°
Left	0 – 48°
Positive Mitre Angle Stop	0, 15, 22.5, 31.6 and 45°
Dimensions	555 x 790 x 485mm
Weight	14kg



110V **999021** 230V **999001**

C12RSH2 305mm Slide Compound Mitre Saw



Variant	Voltage	Contents	Case	GTIN
C12RSH2J1Z	230V	C12RSH2 + dust bag + vice assembly + wrench	X	4966376291151
C10FCE2J2Z	110V	C12RSH2 + dust bag + vice assembly + wrench	X	4966376291168

Specifications

Capacity:	305mm
Blade Dia.	305mm
Capacity (H x W):	
Cross Cut 0°	105 x 312mm
Mitre Left/Right 45°	105 x 220mm
Bevel Left 45°	68 x 312mm
Bevel Right 45°	43 x 312mm
Bevel (Left) 45° + Mitre (Left) 45°	68 x 220mm
Bevel (Left) 45° + Mitre (Right) 31°	68 x 265mm
Bevel (Right) 45° + Mitre (Right) 45°	43 x 220mm
Bevel (Right) 45° + Mitre (Left) 31°	43 x 265mm
Power Input	1520W
No Load Speed	4000/min
Mitre Angle	Right: 0-57° Left: 0-45°
Bevel Angle	Right: 0-45° Left: 0-45°
Positive Mitre Angle Stops	0, 15, 22.5, 31.6 and 45°
Dimensions	655 x 890 x 724mm
Weight	27kg



110V **999038** 230V **999065**

712650 Universal Workstation



Variant	Case	GTIN
712650Z	X	8717574043532

Specifications

Weight:	27.7kg
Maximum load	136kg
Maximum width of extension arms	2.35m
Size of extended stand:	1416 x 651 x 916mm (L x W x H)

CR13V2 130mm Reciprocating Saw



Specifications

Capacity:	Pipe	130mm
	Steel Plate	19mm
	Wood	300mm
Power Input		1010W
Length of Stroke		29mm
No-Load Speed(stroke)		0-2800/min
Overall Length		435mm
Weight		3.3kg



Variant	Voltage	Contents	Case	GTIN
CR13V2J1Z	230V	CR13V2 + blade + wrenches	BM	4966376282272
CR13V2J2Z	110V	CR13V2 + blade + wrenches	BM	4966376282289

CR13VBY 130mm Reciprocating Saw



UVP
ULTRA VIBRATION PROTECTION

Specifications

Capacity:	Pipe	130mm
	Steel Plate	19mm
	Wood	300mm
Power Input		1150W
Length of Stroke		32mm (1-1/4")
No-Load Speed(stroke)		0 - 3000/min
Overall Length		465mm
Weight		4.4kg



Variant	Voltage	Contents	Case	GTIN
CR13VBYJ1Z	230V	CR13VBY + blade	BM	4966376282432
CR13VBYJ2Z	110V	CR13VBY + blade	BM	4966376282449

CR13VEY Brushless Reciprocating Saw

NEW



**BRUSH
LESS**
Brushless Motor
UVP
ULTRA VIBRATION PROTECTION

Specifications

Capacity:	Pipe	130mm
	Steel Plate	19mm
	Wood	300mm
Power Input		1100W
Length of Stroke		32mm
No-Load Speed(stroke)		0-3000/min
Overall Length		490mm
Weight		3.9kg

Variant	Voltage	Contents	Case	GTIN
CR13VEYJ1Z	230V	CR13VEY + blade	BM	4966376282432
CR13VEYJ2Z	110V	CR13VEY + blade	BM	4966376282449

CV350V Multi Tool



Li-ion
**BRUSH
LESS**
Brushless Motor

Specifications

Power Input		350W
Oscillation Frequency:		
Standard Mode (Dial 1 - 5)		6000 - 20000/min
AUTO Mode (Dial A)		15000 - 20000/min
Oscillation Angle		3.2°
Overall Length		280 mm
Weight		1.5kg



Variant	Voltage	Contents	Case	GTIN
CV350VJ3Z	230V	CV350V + blades + sandpaper + sanding pad + tool box	SC	4966376294619
CV350VJ4Z	110V	CV350V + blades + sandpaper + sanding pad + tool box	SC	4966376294626

M8V2 1/4" Router



Specifications

Capacity: Collet Chuck	8.35mm (1/4")
Plunge Depth	60mm
Power Input	1150W
No Load Speed	11000 – 25000/min
Weight	3.6kg



999043

Variant	Voltage	Contents	Case	GTIN
M8V2J1Z	230V	M8V2 + straight guide + template guide + wrench	BM	4966376295500
M8V2J2Z	110V	M8V2 + straight guide + template guide + wrench	BM	4966376295517

M12VE 1/2" Router



Specifications

Capacity: Collet Chuck	12.7mm (1/2")
Plunge Depth	65mm
Power Input	2000W (230V), 1570W (110V)
No Load Speed	8000 – 22000/min
Weight	5.3kg



999038

Variant	Voltage	Contents	Case	GTIN
M12VEJ6Z	230V	M12VE + straight guide + template guide + wrench	BM	4966376295319
M12VEJ7Z	110V	M12VE + straight guide + template guide + wrench	BM	4966376295326

M12V2 1/2" Router



Specifications

Capacity: Collet Chuck	12.7mm (1/2")
Plunge Depth	65mm
Power Input	2000W
No Load Speed	8000 – 22000/min
Weight	6.3kg



999044

Variant	Voltage	Contents	Case	GTIN
M12V2J1Z	230V	M12V2 + 2 collet chucks + centring gauge + straight guide + template guide + template guide adapter + dust guide + dust guide adapter+ wrench	BM	4966376295111
M12V2J2Z	110V	M12V2 + 2 collet chucks + centring gauge + straight guide + template guide + template guide adapter + dust guide + dust guide adapter+ wrench	BM	4966376295128

P20SF Planer



Specifications

Capacity: Cutting Width	82mm
Max Cutting Depth	2.6mm
Power Input	620W
No Load Speed	17000/min
Overall Length	296mm
Weight	2.5kg

999021

Variant	Voltage	Contents	Case	GTIN
P20SFJ1Z	230V	P20SF + blade setting gauge + guide + wrench	BM	4966376295951
P20SFJ2Z	110V	P20SF + blade setting gauge + guide + wrench	BM	4966376295968

SV15YC
150mm Random Orbit Sander

Adjustable orbit diameter

Turbo Boost

Variable speed

Removable front handle



Specifications

Capacity: Sanding Pad	150mm
Power Input	350W
Orbit Dia.	2.8/6.2mm
No Load Speed*1	4200 - 11000/min
Overall Length	182mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
SV15YC1Z	230V	SV15YC + sanding paper + dust bag + wrench	X	4966376280148
SV15YC2Z	110V	SV15YC + sanding paper + dust bag + wrench	X	4966376280155

SV13YA
125mm Random Orbit Sander

Specifications

Capacity: Sanding Pad	125mm
Power Input	230W
Orbit Dia.	3.2mm
No Load Speed	7000 - 12000/min
Overall Height	145mm
Weight	1.4kg



Variant	Voltage	Contents	Case	GTIN
SV13YAJ1Z	230V	SV13YA + sanding paper + dust bag	BM	4966376279845
SV13YAJ2Z	110V	SV13YA + sanding paper + dust bag	BM	4966376279852

SV12SG Palm Sander



Specifications

Capacity: Pad Size	110 x 100mm
Power Input	200W
Orbital Dia.	1.5mm
No Load Speed: Spindle	14000/min
Orbit	28000/min
Overall Length	137mm
Weight	1.1kg



Variant	Voltage	Contents	Case	GTIN
SV12SGJ1Z	230V	SV12SG + sanding paper + dust bag + punch plate	X	4966376279555
SV12SGJ2Z	110V	SV12SG + sanding paper + dust bag + punch plate	X	4966376279562

SB8V2 76mm Belt Sander



Specifications

Capacity: Belt Size	76 x 533mm
Power Input	1020W
No-Load Belt Speed:	250 - 450m/min
Overall Length	318mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
SB8V2J1Z	230V	SB8V2 + sanding belt + dust bag	X	4966376296743
SB8V2J2Z	110V	SB8V2 + sanding belt + dust bag	X	4966376296750

SB10V2 100mm Belt Sander



Specifications

Capacity: Belt Size	100 x 610mm
Power Input	1020W
No-Load Belt Speed:	240 - 420m/min
Overall Length	363mm
Weight	5.2kg



Variant	Voltage	Contents	Case	GTIN
SB10V2J1Z	230V	SB10V2 + sanding belt + dust bag	X	4966376296590
SB10V2J2Z	110V	SB10V2 + sanding belt + dust bag	X	4966376296606

SP18VA Sander/Polisher



Specifications

Capacity: Sanding Disc	180mm
Wool Bonnet	180mm
Spindle Thread	M14 x 2
Power Input	1250W
No Load Speed	0 - 3400/min
Overall Length	415mm
Weight	2.8kg



Variant	Voltage	Contents	Case	GTIN
SP18VAJ1Z	230V	SP18VA + loop handle + rubber pad + wool bonnet + sanding disc + wrench	X	4966376279197
SP18VAJ2Z	110V	SP18VA + loop handle + rubber pad + wool bonnet + sanding disc + wrench	X	4966376279203

GP2S2 Die Grinder



Specifications

Capacity: Collet Chuck	6mm
Max. Wheel Dia	25mm
Power Input	520W
No Load Speed	29000/min
Overall Length	359.4mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
GP2S2JZ	110V	GP2S2 + wrenches	X	4966376277575

Wheel not included

G10SR4 100mm Angle Grinder



Specifications

Capacity: Wheel Dia	100mm
Hole Dia	16mm
Spindle Thread	M10 x 1.5
Power Input	730W
No Load Speed	10000/min
Overall Length	258mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
G10SR4J5Z	230V	G10SR4 + side handle + wrench	X	4966376271887
G10SR4J6Z	110V	G10SR4 + side handle + wrench	X	4966376271894

Abrasive wheel not included

G12STX 115mm Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11500/min: 230V 12000/min: 110V
Overall Length	254mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12STXJ5Z	230V	G12STX + side handle + wrench	X	4966376273225
G12STXJ6Z	110V	G12STX + side handle + wrench	X	4966376273232

Abrasive wheel not included

G12STX/CD 115mm Angle Grinder Kit



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11500/min: 230V 12000/min: 110V
Overall Length	254mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12STXJ7Z	230V	G12STX diamond wheel + + side handle + wrench	BM	4966376273249
G12STXJ8Z	110V	G12STX diamond wheel + + side handle + wrench	BM	4966376273256

Abrasive wheel not included

G12SR4 115mm Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	730W
No Load Speed	10000/min
Overall Length	258mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12SR4J5Z	230V	G12SR4 + side handle + wrench	X	4966376272938
G12SR4J6Z	110V	G12SR4 + side handle + wrench	X	4966376272945

Abrasive wheel not included

G12SN2 115mm Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	900W
No Load Speed	10500/min
Overall Length	266mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12SN2J5Z	230V	G12SN2 + side handle + wrench	X	4966376272716
G12SN2J6Z	110V	G12SN2 + side handle + wrench	X	4966376272723

Abrasive wheel not included

G12SE2 115mm Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	1200W
No Load Speed	11000/min
Overall Length	321mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
G12SE2J1Z	230V	G12SE2 + abrasive wheel + side handle + wrench	X	4966376272419
G12SE2J2Z	110V	G12SE2 + abrasive wheel + side handle + wrench	X	4966376272426

G13SE2 125mm Angle Grinder



Specifications

Capacity: Wheel Dia.	125mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Power Input	1200W
No Load Speed	11000/min
Overall Length	321mm
Weight	1.9kg



Variant	Voltage	Contents	Case	GTIN
G13SE2J1Z	230V	G13SE2 + abrasive wheel + side handle + wrench	X	4966376273928
G13SE2J2Z	110V	G13SE2 + abrasive wheel + side handle + wrench	X	4966376273935

G13YC2 125mm Angle Grinder with soft start



Specifications

Capacity: Wheel Dia	125mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	1500W
No Load Speed	10500/min
Overall Length	323mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
G13YC2J2Z	110V	G13YC2 + abrasive wheel + side handle + wrench	X	4966376275052

G18SE4 180mm Angle Grinder

NEW



Specifications

Capacity: Wheel Dia	180mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No-Load Speed	8500/min
Overall Length	492mm
Weight	5.9kg



Variant	Voltage	Contents	Case	GTIN
G18SE4J1Z	230V	G18SE4 + side handle + wrench	X	4966376326136
G18SE4J2Z	110V	G18SE4 + side handle + wrench	X	4966376326143

Abrasive wheel not included

Grinding angle & die grinders

G23ST

230mm Angle Grinder



Specifications

Capacity: Wheel Dia	230mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2000W
No Load Speed	6600/min
Overall Length	469mm
Weight	5.1kg



Variant	Voltage	Contents	Case	GTIN
G23STJ1Z	230V	G23ST + side handle + wrench	X	4966376276677
G23STJ2Z	110V	G23ST + side handle + wrench	X	4966376276684

Abrasive wheel not included

G23ST/CD

230mm Angle Grinder Kit



Specifications

Capacity: Wheel Dia	230mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2000W
No Load Speed	6600/min
Overall Length	469mm
Weight	5.1kg



Variant	Voltage	Contents	Case	GTIN
G23STCDJ1Z	230V	G23ST + diamond wheel + side handle + wrench	BM	5017658063986
G23STCDJ2Z	110V	G23ST + diamond wheel + side handle + wrench	BM	5017658063993

Abrasive wheel not included

G23SC4

230mm Angle Grinder

NEW



Specifications

Capacity: Wheel Dia	230mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	6600/min
Overall Length	492mm
Weight	6.1kg



Variant	Voltage	Contents	Case	GTIN
G23SC4J1Z	230V	G23SC4 + side handle + wrench	X	4966376326020
G23SC4J2Z	110V	G23SC4 + side handle + wrench	X	4966376326037

Abrasive wheel not included

G23MR

230mm Angle Grinder with aluminium body



Specifications

Capacity: Wheel Dia	230mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	6600/min
Overall Length	492mm
Weight	5.4kg



Variant	Voltage	Contents	Case	GTIN
G23MRJ1Z	230V	G23MR + side handle + wrench	X	4966376276073
G23MRJ2Z	110V	G23MR + side handle + wrench	X	4966376276080

Abrasive wheel not included

CN16SA
Nibbler



Specifications

Capacity: Steel	1.6mm
Stainless	1.2mm
Cutting Width	5mm
Min. Cutting Radius	40mm
Power Input	400W
No Load Speed	2300/min
Overall Length	250mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
CN16SAJ1Z	230V	CN16SAJ1Z + 2 wrenches	X	4966376269914
CN16SAJ2Z	110V	CN16SAJ1Z + 2 wrenches	X	4966376269921

CC14SF
355mm Cut-off Machine



Specifications

Capacity: Bar Dia.	65mm
Pipe Dia.	120mm
Shaped Steel	130 x 130mm
Power Input	2000W
No Load Speed	3800/min
Dimensions (L x W x H)	603 x 318 x 603mm
Weight	16.5kg



Variant	Voltage	Contents	Case	GTIN
CC14SFJ1Z	230V	CC14SF + wrench	X	4966376281312
CC14SFJ2Z	110V	CC14SF + wrench	X	4966376281329

Wheel not included

CM12Y
305mm Disc Cutter



Specifications

Capacity: Wheel Dia.	305mm
Max. Cut Depth	100mm
Cut Depth per one cutting	50mm
Power Input	2400W
No Load Speed	5000/min
Arbor	22mm
Overall Length	633mm
Weight	11.5kg



Variant	Voltage	Contents	Case	GTIN
CM12YJ1Z	230V	CM12Y + dust adapter + safety glasses + wrench	X	4966376281688
CM12YJ2Z	110V	CM12Y + dust adapter + safety glasses + wrench	X	4966376281695

Diamond wheel not included

UM12VST 120mm Mixer



Specifications

Capacity: Max Stirrer Dia.	120mm
Power Input	1100W
Tool Spindle Thread	M14
No Load Speed : High	300 - 650/min
: Low	150 - 300/min
Overall Length	325mm
Weight	5.4kg



Variant	Voltage	Contents	Case	GTIN
UM12VSTGBZ	230V	UM12VST + stirrer + carbon brushes + wrenches	X	5017658062965

UM16VST 160mm Mixer



Specifications

Capacity: Max Stirrer Dia.	160mm
Power Input	1500W
Tool Spindle Thread	M14
No Load Speed : High	300 - 650/min
: Low	150 - 300/min
Overall Length	335mm
Weight	5.6kg



Variant	Voltage	Contents	Case	GTIN
UM16VSTGBZ	230V	UM16VST + stirrer + extension bar + carbon brushes + wrenches	X	5017658062965

RB40VA Blower



Specifications

Capacity: Air Pressure	5.5 kPa
Air Volume Flow	3.8 m³/min
Power Input	550W
No Load Speed	16000min
Overall Length	447mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
RB40VAJ1Z	110V	RB40VA + nozzle + dust bag	X	4966376278329
RB40VAJ2Z	230V	RB40VA + nozzle + dust bag	X	4966376278336

NT65GS
65mm Gas Straight Finish Nailer



Li-ion

Specifications

Driving System	Piston Reciprocating Action (Gas Powered)
Nail Size	16 gauge
Nail Length	25-65mm
Driving Speed	2 nails/sec.
Loading capacity of magazine	100 nails
Dimensions (L x H)	268 x 282mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
NT65GSJ9Z	3.6V	NT65GS + 2 x 1.5Ah Li-ion batteries + UC3SML charger + nose cap + safety glasses + wrench	BM	4966376297221

NT65GB
65mm Gas Angled Finish Nailer



Li-ion

Specifications

Driving System	Piston Reciprocating Action (Gas powered)
Nail Size	16 gauge
Nail Length	32-65mm
Magazine Angle	20°
Driving Speed	2 nails/sec.
Loading capacity	100 nails
Dimensions (L x H)	268 x 282mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
NT65GBJ9Z	3.6V	NT65GB + 2 x 1.5Ah Li-ion batteries + UC3SML charger + nose cap + safety glasses + wrench	BM	4966376297207

NR90GC2
90mm Gas Framing Nailer



Li-ion

Specifications

Driving System	Piston Reciprocating Action (Gas powered)
Nail Size	3.0-3.3mm
Nail Length	50-90mm
Magazine Angle	34 degrees
Driving Speed	2 - 3 nails/sec
Loading capacity of magazine	25 - 37 nails
Dimensions (L x H)	347 x 353mm
Weight	3.5 kg



Variant	Voltage	Contents	Case	GTIN
NR90GC2J8Z	7.2V	NR90GC2 + 2 x 1.5Ah Li-ion batteries + UC18YG charger + safety glasses + wrench	BM	4966376297085

NT50AE2
50mm Brad Nailer



Variants
• NT50AE2L2Z

Specifications

Driving System	Piston Reciprocating Action
Operating Pressure Range	4.9-8.3 bar (70 - 120psi)
Driving Speed	3 nails/sec.
Nail Size	18 gauge
Nail Length	16-50mm
Loading capacity	100 nails
Air Inlet	NPT 1/4 Thread
Dimensions (L x H)	254 x 233mm
Weight	1.0kg

Variant	Contents	Case	GTIN
NT50AE2L2Z	NT50AE2 + nose cap + safety glasses	BM	4966376297160


Spares carbon brushes

	Model	Part Number		
		Standard type	Auto-stop type	
C	C7	999043	999073	
	C7BU3	999043	--	
	C7SB3	999043	--	
	C7SS	999043	999073	
	C7ST	999091	--	
	C7U3	999043	--	
	C7UR	999038	--	
	C7UY	999043	999073	
	C8FSE	999021	--	
	C8FSHE	999001	--	
	C9BU3	999038	--	
	C9U3	999038	--	
	C10FCE2:			
	110V	999038	--	
	230V	999065	--	
	C10FCH2:			
	110V	999038	--	
	230V	999065	--	
	C10FSB	999043	999073	
	C10FSH	999043	999073	
	C12FCH:			
	110V	999038	--	
	230V	999065	--	
	C12LCH:			
	110V	999038	--	
	230V	999065	--	
	C12RSH2:			
	110V	999038	--	
	230V	999065	--	
	CC12Y	999044	999074	
	CC14SF	999044	999074	
	CD7SA	999043	999073	
	CE16SA	999021	999070	
	CE18DSL	999054	--	
	CG18DSDL	999016	--	
	CJ65V3	999041	999072	
	CJ90VST	999041	999072	
	CJ110MV	999041	999072	
	CJ160V	999041	999072	
	CM5SB	999088	999076	
	CM9SR	999044	999074	
	CM12Y	999044	999074	
	CN16SA	999021	999070	
	CN18DSL	999054	--	
	CR13V2	999043	999073	
CR13VB	999043	999073		

	Model	Part Number		
		Standard type	Auto-stop type	
C	CR13VBY	999043	999073	
	CR13VC	999043	999073	
	CR18DL	999058	--	
	CR18DSL	999058	--	
	CV350V	999005	--	
	D	D6SH	999041	999072
		D10VC3	999041	999072
		D10VF	999041	999072
		D10VG	999041	999072
		D10VST	999041	999072
		D10YB	999021	999070
		D13	999043	999073
		D13VB3	999041	999072
D13VF		999041	999072	
DH18DL		999100	--	
DH18DSL		999100	--	
DH24DVC		999100	--	
DH24PG		999041	999072	
DH24PH		999041	999072	
DH24PX		999041	999072	
DH24PX2		999041	999072	
DH25DAL		--	999090	
DH25DL		--	999090	
DH26PB		999041	999072	
DH26PC		999041	999072	
DH26PX		999041	999072	
DH28PBY		999041	999072	
DH28PC		999004	--	
DH28PCY		999041	999072	
DH28PD		999004	--	
DH28PX		999041	999072	
DH30PC2		--	999073	
DH36DL	--	999090		
DH40MC	999043	999073		
DN18DSL	999054	--		
DS18DL2	999054	--		
DS18DSAL	999054	--		
DS18DSDL	999054	--		
DV16V	999041	999072		
DV18DSDL	999054	--		
DV18V	999041	999072		
DV20VB2	999041	999072		
DV20VD	999088	999076		

	Model	Part Number	
		Standard type	Auto-stop type
F	FCJ65V3	999041	--
	FD10SA	999041	--
G	FDV16VB2	999041	--
	G10SR4	999067	--
G	G10SS2	999067	--
	G12SE2	999088	999076
	G12SN2	999005	--
	G12SR4	999067	--
	G12SS2	999067	--
	G12STX	999067	--
	G13SB3	999088	999076
	G13SC2	999043	999073
	G13SE2	999088	999076
	G13YC2	999088	999076
	G13YG	372939	--
	G14DL	999054	--
	G18DL	999054	--
	G18DSL	999054	--
	G18SE3	999061	
	G18SE4	999061	999089
	G23MR	999061	999089
	G23SC3	999061	--
	G23SC4	999061	999089
	G23ST	999059	999093
GP2S2	999088	999076	
GP5V	999088	999076	
H	H25PV	999056	--
	H41	999043	999073
	H41MB2	999043	999073
	H41SA3	999043	999073
	H41SD	999043	999073
	H50	999043	999073
	H60MC	--	999074
	H65SC	--	999086
	H65SD3	--	999086
	H70SA	--	999086
H70SD	--	999086	
H90SG	--	999086	

	Model	Part Number	
		Standard type	Auto-stop type
M	M6SB	999021	999070
	M8V2	999043	999073
M	M12SA2	999044	999074
	M12V2	999044	999074
	M12VE	999038	999071
P	P18DSL	999017	--
	P20SA2	999041	999072
	P20SB	999021	999070
	P20SE	999021	999070
	P20SF	999021	999070
	PH-65A	999044	999074
	PR-38E	999043	999073
R	RB40VA	999021	999070
S	SAT-180	999043	999073
	SAY-150A	999021	999070
	SB8V2	999043	999073
	SB10S2	999043	999073
	SB10V2	999043	999073
	SP18VA	999043	999073
	SV12SD	999041	999072
SV12SG	999041	999072	
SV12V	999041	999072	
SV13YA	999041	999072	
SV15YC	371858	--	
U	UM12VST	333631	--
	UM16VST	333631	--
V	VTV-16	999043	999073
	VTP-16A	999043	999073
W	W4YD	999021	999070
	W6V4	--	999091
	W6VB3	--	999091
	W6VM	--	999091
	W8VB2	--	999091
	WF14DSL	999054	--
	WF18DSL	999054	--
	WH10DL	999054	--
WR18DSDL	999054	--	
WR18DSHL	999100	--	

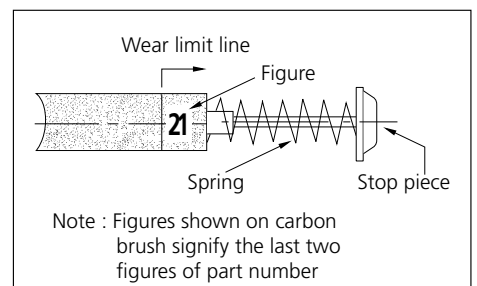

HiKOKI

HIGH PERFORMANCE POWER TOOLS

HiKOKI Power Tools (UK) Ltd

Precedent Drive, Rooksley
Milton Keynes MK13 8PJ

Tel: Sales office: 01908 354700
Service: 01908 354733

Email: info@hikoki-powertools.co.uk

Follow us on social media and never miss out
on the latest HiKOKI news



hikoki-powertools.co.uk

Distributed by: