



HUSTLER®

2018 AUSTRALIAN CATALOGUE



VISIT OUR HUSTLER® WEBSITE

Browse through our comprehensive range of units with a click of a button.

Read through all unit specs, find special pricing and sales, compare units, submit your questions.

Keep up to date with the Hustler website.



You can also Follow us on
facebook.com/hustler.AUS



SIGN UP FOR OUR HUSTLER NEWSLETTER

Stay up to date with news, competitions, and specials



hustlermower.com.au

CONTENTS

HISTORY of the Hustler brand	4
VX4® TECHNOLOGY	6
RAPTOR®	8
RAPTOR® SD	10
RAPTOR® FLIP-UP	12
FASTRAK®	14
FASTRAK® SDX	18
SUPER Z®	22
SUPER Z® HYPERDRIVE	24
HUSTLER Z™ DIESEL	26
SUPER 104	28
COMPARISON TABLE	30

X-One specifications in Comparison table

ICONS



HOME USER

Perfect for lawns under one acre



LAND OWNER

Perfect for lawns over one acre



PROFESSIONAL

Perfect for lawns from one to five acres

WHY HUSTLER IS A BETTER MOWER

SMOOTHTRAK™ TWIN-LEVER STEERING

It's what makes driving a Hustler a better experience. Our mowers have the smoothest and most precise steering in the industry. You'll glide around obstacles and make zero-radius turns with ease.



PATENTED PARK BRAKES

Simple, convenient and patented system that automatically engages when you open the steering levers.



HEAVY-DUTY FABRICATED STEEL DECK

We are the industry leader in manufacturing robust and solid decks. The heavy-duty welded steel deck provides maximum strength and durability.



ZERO TURN PRECISION

Zero-turn mowers are designed to cut so closely around obstacles that there's virtually no need to trim. These mowers pivot through 180 degrees without leaving any uncut grass.



LOWER CENTRE OF GRAVITY

A reduced profile translates into tighter handling and stability and greater ease in getting on and off the mower.

THE HUSTLER® STORY

FIRST WE CHANGED EVERYTHING

Hustler® Turf Equipment was born of a simple need for a riding mower that could manoeuvre the irregular landscape of the family home, complete with bird baths, gardens and winding front walkways. The first Hustler® mower was a compilation of mower parts and farm machinery, created by a genius named John Regier. Mr. Regier's mower cut grass and steered like no other. It could hug a flagpole or reverse directions at a fence line, with a turning radius of zero. With this, the world's first zero-turn mower was born.



“OUR MISSION IS TO PROVIDE THE MOST DEPENDABLE, USEFUL AND TIME-SAVING PRODUCTS IN TURF CARE.”



HISTORY IS MADE

When Mr. Regier brought his design to tractor cab manufacturer Excel™ Industries, the timing was perfect. He couldn't maintain the production demand on his own, and Excel™ was looking to expand its product line. When the folks at Excel™ saw the mower in action, they knew they had a product that would revolutionize the mowing industry. Under the direction of company president Roy Mullet, Excel™ began production of Hustler® mowers at its plant in Hesston, Kansas.

1961 Roy Mullet's vision and entrepreneurial spirit was a catalyst for the company. Later that same year, he was appointed the president by the Board of Directors.

Since then, Hustler® has become one of the leading turf care brands in the world. Across the globe, the Hustler® brand signifies innovation, quality and superior customer care.

In addition to manufacturing the best-in-class mowers, Hustler® is committed to providing a quality owner experience. Our mission is to provide the most dependable, useful, and time-saving products in turf care, while providing unmatched customer loyalty and the best warranty in the business.

Hustler's experienced dealers are always ready to answer questions and provide expert service to every customer. The growing Hustler® family now includes more than 1200 U.S. dealers and more than 40 distributors worldwide.

By continually evolving the Hustler® line, we have grown from humble beginnings to a leader in the industry. Our mowers undergo regular re-designs and improvements under the guidance of innovative Excel™ engineers, always living up to the highest Hustler® standards. With every mower our goal remains the same – to provide our customers with a dependable mower that will help them complete more work in less time.

**Innovation and quality.
That's how Hustler changed everything.**

VX4[®]

TECHNOLOGY

ANOTHER
INNOVATIVE IDEA.
ANOTHER BEAUTIFUL
HUSTLER[®] LAWN.

HUSTLER[®] DECK TECHNOLOGY IS A CUT ABOVE THE INDUSTRY

VERSATILITY

Adjustable front inner wall allows deck performance to be optimised for all grass conditions and seasons.

VELOCITY

The progressively larger tunnel in front of the blades, and a wider discharge opening, moves grass through the deck faster resulting in greater discharge dispersion.

VOLUME

Higher air and grass volume throughput results in less material carried in the cutting chambers. This allows for higher ground speed without compromising cut quality.

VACUUM

The grass is lifted more effectively. This results in a crisp, clean cut and appearance every time.



- A .375" thick discharge plate braces the discharge opening from impact.
- B 7 gauge top doubles – (spindle reinforcement). 42" mount thickness.
- C .25" thick ribs provide continuous front-to-back bracing.
- D Increased idler and drive pulley diameters to accommodate higher horsepower engines.
- E 7 gauge outside wrappers (skirt).
- F 11 gauge bottom double ties spindle mounts together to resist spindle impacts.
- G .375" thick anti-scalp wheel mounts.
- H Front wall box section creates a side-to-side (lateral) beam that resists front impacts and keeps deck flat. Anti-scalp wheel pockets are heavily reinforced to protect anti-scalp wheels and deck.
- I Replaceable rubberised skid-pad.
- J Standard recessed anti-scalp wheels.
- K Adjustable inner-wall baffles.
- L Industrial ductile-iron spindle with 1.5" shaft diameter.
- M Larger discharge opening with high density rubberised discharge chute for greater discharge dispersion.
- N Optional anti-scalp wheels (not shown here).
- O Large tunnel in front of the blades increases discharge capacity.



AT HUSTLER® , OUR STORY IS ONE OF GROWTH THROUGH INNOVATION.

We constantly strive to maintain a brand that signifies innovation and quality. By continually evolving the Hustler® line, we have grown from humble beginnings to a leader in the industry.



Information is based on the 60" deck

THE SUPER Z, SUPER Z HD, HUSTLER Z DIESEL AND X-ONE CONTAIN VX4® TECHNOLOGY

Our mowers undergo regular re-designs and improvements under the guidance of innovative Excel™ engineers, always living up to the highest Hustler® standards. With every mower, our goal remains the same — to provide our customers with a dependable mower that will help them complete more work in less time.

Once we've designed a mower we love, we rigorously test every model, leaving nothing to chance. Our mowers meet expectations that are higher than industry standards. Hustler® owners can rely on their mowers to be tough, fast, smooth and the most reliable on the market.



MADE IN USA



HUSTLER[®]

RAPTOR[®]

A HIGH PERFORMANCE ZERO-TURN AT A GREAT VALUE.

Hustler's Raptor[®] is designed to the highest of standards and is poised to lead the zero-turn market in the entry level category, delivering the best-in-class overall value versus the competition.



Visit hustlermower.com.au for more information




ACRES PER HOUR*

42" - 2.20

52" - 2.72

**Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.*

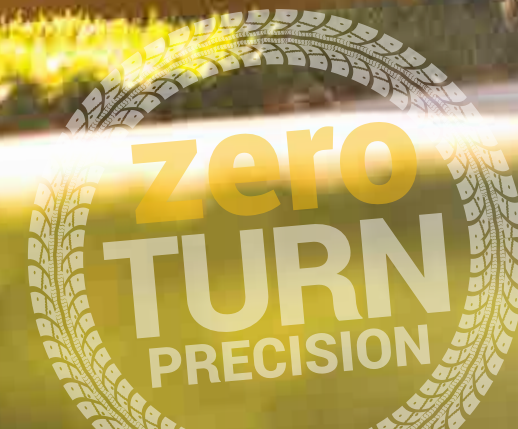

DOMESTIC WARRANTY

3 YEAR

NO HOUR LIMIT

3RD YEAR PARTS ONLY

SMOOTHTRAK™ STEERING
WITH PATENTED
AUTO PARK-BRAKE SYSTEM

MOULDED VINYL SEAT
WITH ARM RESTS

KAWASAKI FR
SERIES ENGINE

11.36 L FUEL
CAPACITY

HAND OPERATED
DECK LIFT

HEAVY-DUTY
CASTER FORKS



11" CASTER TYRES

18" DRIVE TYRES

ANTI-SCALP WHEELS

HEAVY-DUTY FABRICATED
STEEL DECK

52" deck model shown.



CUTTING WIDTHS

Side Discharge 42": 1066 mm
52": 1320 mm

ENGINE

42" Kawasaki FR651 21.5 hp, 726 cc
52" Kawasaki FR691 23 hp, 726 cc
Starter/Charging 12 Volt starter & charging system

DRIVE SYSTEM

Type Dual hydrostatic.
Transmission Hydro-Gear EZT
Brakes Patented automatic

GROUND SPEED

Forward/Reverse 0–10.46 kph/0–6.4 kph

DECK

Construction 11 ga. fabricated
Spindle Mounts Reinforced 14 ga double welded
Impact/Trim Areas 1/4" x 3/4" steel bar
Cutting Height 38.1 mm to 114.3 mm
Deck Lift Hand-operated
Spindles Die cast aluminium housing, 19.3 mm diameter high carbon steel shafts and sealed ball bearings.
Drive Electric PTO Clutch

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades. Optional blades available

42" 2 - 20.50" x 2.25" x .188
52" 3 - 17.86" x 2.25" x .188

Blade Tip Speed: (at 3200 RPM engine speed)
42" 16 700 fpm
52" 16 600 fpm

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

42" 33 mm
52" 250 mm

GENERAL

Seat Moulded-vinyl seat, with fore and aft adjustment and arm rests.
Fuel Cup Holder Unleaded, 11.36 L capacity
Caster Tyres Yes
Drive Tyres 11 x 4.0 – 5, smooth tread
18 x 8.50 – 8, turf tread

DIMENSIONS

Height: 990 mm
Length: 1854 mm

42" Deck
Overall width 1128 mm (*discharge chute up*)
Tyre-to-tyre width 1040 mm
Weight 229.06 kg

52" Deck
Overall width 1356.3 mm (*discharge chute up*)
Tyre-to-tyre width 1040 mm
Weight 236.8 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- 2 Bag Catcher (non-powered)
- Steering Extension Arms
- Hour Meter

Images for illustrative purposes only.

hustlermower.com.au



MADE IN USA



HUSTLER[®]



RAPTOR[®] SD

MAKES SMALL WORK OUT OF LARGE JOBS.

The **Raptor[®] SD** is a low profile, heavy-duty premium residential zero-turn with a deep fabricated steel deck, toughest front end with large 13" caster tyres, and exceptional control and handling.

The **Raptor[®] SD** also features an industry leading Kawasaki engine that provides unmatched power and reliability.



Visit hustlermower.com.au for more information



ACRES PER HOUR*

36" - 2.18
 42" - 2.54
 48" - 2.91
 54" - 3.27

*Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.



DOMESTIC WARRANTY	
3 YEAR	300 HOUR LIMIT
COMMERCIAL WARRANTY	
3 YEAR	300 HOUR LIMIT



54" deck model shown.



CUTTING WIDTHS

Side Discharge	36": 914.4 mm
	42": 1030 mm
	48": 1219 mm
	54": 1371 mm

ENGINE

36"	Kawasaki FR651, 21.5 hp, 726 cc
42"	Kawasaki FR651, 21.5 hp, 726 cc
48"	Kawasaki FR691, 23 hp, 726 cc
54"	Kawasaki FR691, 23 hp, 726 cc
Starter/Charging	12 Volt starter & charging system

DRIVE SYSTEM

Type	Dual hydrostatic.
Transmission	Hydro-Gear ZT2800
Brakes	Patented automatic

GROUND SPEED

Forward/Reverse	0–12.1 kph/0–6.4 kph
------------------------	----------------------

DECK

Construction	11 ga. fabricated
Spindle Mounts	Reinforced 7 ga double welded
Impact/Trim Areas	3/8" x 1" steel bar
Cutting Height	38.1 mm to 114.3 mm
Deck Lift	Foot-operated
Spindles	Die cast aluminium housing 25.4 mm diameter high carbon steel shafts and sealed ball bearings.
Drive	Electric PTO Clutch

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.

36"	2 - 17.86" x 2.50" x .20"
42"	2 - 20.50" x 2.50" x .20"
48"	3 - 16.50" x 2.50" x .20"
54"	3 - 18.50" x 2.50" x .20"

Blade Tip Speed:	(at 3200 RPM engine speed)
36"	18 500 fpm
42"	18 400 fpm
48"	18 600 fpm
54"	18 900 fpm

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

36"	12 mm
42"	28 mm
48"	90 mm
54"	90 mm

GENERAL

Seat	Moulded-vinyl seat, with fore and aft adjustment and arm rests.
Fuel Cup Holder	Unleaded, 11.36 L capacity
Caster Tyres	Yes
36", 42", 48"	13 x 5 – 6, smooth tread
54"	13 x 6.5 – 6, smooth tread
Drive Tyres	
36"	20 x 6.5 – 10, turf tread
42", 48"	20 x 8.0 – 10, turf tread
54"	20" x 12 – 10, turf tread

DIMENSIONS

Height: 1066 mm
Length: 1854 mm


36" Deck	
Overall width	947.42 mm (discharge chute up)
Tyre-to-tyre width	972.82 mm
Weight	265.8 kg
42" Deck	
Overall width	1128 mm (discharge chute up)
Tyre-to-tyre width	1040 mm
Weight	269 kg
48" Deck	
Overall width	1244 mm (discharge chute up)
Overall width	1040 mm
Tyre-to-tyre width	284.85 kg
Weight	
54" Deck	
Overall width	1397 mm (discharge chute up)
Tyre-to-tyre width	1168 mm
Weight	294.83 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- 2 Bag Catcher (non-powered)
- Steering Extension Arms
- Light Kit



MADE IN USA

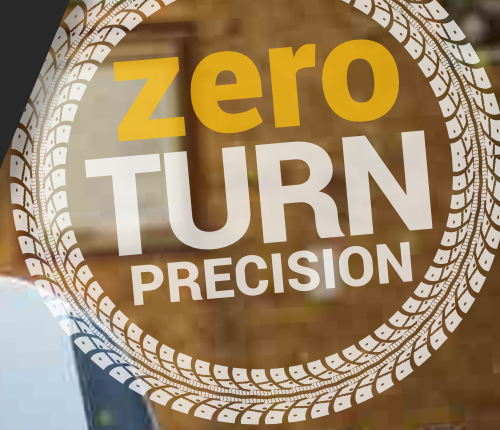

HUSTLER[®]

RAPTOR[®] FLIP-UP

GOODBYE JACKS & DIRTY BACKS!

The Raptor[®] FLIP-UP features patent pending QuickFlip™ technology. Enjoy effortless cleaning and blade changing, automated deck height adjustment and less required storage space all at the push of a button.



Visit hustlermower.com.au for more information

ACRES PER HOUR*
48" - 2.71

**Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.*



DOMESTIC WARRANTY	
4 YEAR	400 HOUR LIMIT
COMMERCIAL WARRANTY	
4 YEAR	400 HOUR LIMIT



9" CASTER TYRES

SMOOTHTRAK™
STEERING WITH
PATENTED AUTO
PARK-BRAKE SYSTEM

HIGH BACK SEAT
WITH ARM RESTS

KAWASAKI FR
SERIES ENGINE

11.36 L FUEL
CAPACITY

QUICKFLIP™ TECHNOLOGY
PUSH BUTTON TO
ELECTRONICALLY RAISE
AND LOWER DECK FOR
EASY BLADE AND SERVICE
ACCESS

4 ANTI-SCALP
WHEELS

HEAVY-DUTY FABRICATED
STEEL DECK

20" DRIVE
TYRES



CUTTING WIDTHS

Side Discharge 48": 1219 mm

ENGINE

48" Starter/Charging Kawasaki FR691, 23 hp, 726 cc
12 Volt starter & charging system

DRIVE SYSTEM

Type Dual hydrostatic.
Transmission Hydro-Gear ZT2800
Brakes Patented automatic

GROUND SPEED

Forward/Reverse 0–11.2 kph/0–6.4 kph

DECK

Construction 11 ga. fabricated
Spindle Mounts Reinforced 7 ga double welded
Impact/Trim Areas 3/8" x 1" steel bar
Cutting Height 38.1 mm to 114.3 mm
Deck Lift Electric/Hydraulic activated
Spindles Die cast aluminium housing
25.4 mm diameter high carbon
steel shafts and sealed ball
bearings.
Drive Electric PTO Clutch

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.

48" 3 - 16.50" x 2.50" x .20"

Blade Tip Speed: (at 3200 RPM engine speed)
48" 18 600 fpm

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

48" 35 mm

GENERAL

Seat Moulded-vinyl seat, with fore and
aft adjustment and arm rests.
Fuel Unleaded, 11.36 L capacity
Cup Holder Yes
Caster Tyres 9 x 3.5 - 4 Smooth Semi
Pneumatic
Drive Tyres 20 x 8.0 - 10, turf tread

DIMENSIONS

Height 1084.6 mm
Length 1763 mm
Overall width 1244 mm (discharge chute up)
Tyre-to-tyre width 1110 mm
Weight 340 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- 2 Bag Catcher (non-powered)
- Steering Lever Extension Kit
- Light Kit



Images for illustrative purposes only.

hustlermower.com.au



MADE IN USA



HUSTLER®

FASTRAK®

BUILT SO HOME OWNERS CAN MOW LIKE A PRO.

The FasTrak® has all the strength, durability and power needed for the prosumer or commercial operator. As proof, we offer a remarkable 4 year limited residential and commercial warranty plus limited lifetime warranties on the frame and leading edge of the deck.



Visit hustlermower.com.au for more information



ACRES PER HOUR*

48" - 3.10

54" - 3.48

60" - 3.88

**Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.*



DOMESTIC WARRANTY

4 YEAR

400 HOUR LIMIT

COMMERCIAL WARRANTY

4 YEAR

400 HOUR LIMIT



LIMITED LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK



60" deck model shown.



CUTTING WIDTHS

Side Discharge	48": 1196 mm
	54": 1348 mm
	60": 1500 mm

ENGINE

48"	Kawasaki FR691, 23 hp, 726 cc
54"	Kawasaki FR691, 23 hp, 726 cc
60"	Kawasaki FR730, 24 hp, 726 cc
Starter/Charging	12 Volt starter & charging system

DRIVE SYSTEM

Type	Dual hydrostatic.
Transmission	Hydro-Gear ZT3100
Brakes	Patented automatic

GROUND SPEED

Forward/Reverse	0–12.9 kph/0–8 kph
------------------------	--------------------

DECK

Construction	10 ga. fabricated
Spindle Mounts	Reinforced 11 ga double welded
Impact/Trim Areas	3/8" x 1" steel bar
Cutting Height	38.1 mm to 114.3 mm
Deck Lift	Foot-operated
Spindles	Aluminium casting with steel shafts and sealed ball bearings
Drive	Electric PTO Clutch

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.

48"	3 - 16.5" x 2.5" x .20"
54"	3 - 18.5" x 2.5" x .20"
60"	3 - 20.5" x 2.5" x .20"

Blade Tip Speed:	(at 3200 RPM engine speed)
48"	18 600 fpm
54"	18 910 fpm
60"	18 410 fpm

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

48"	12.5 mm
54"	65 mm
60"	150 mm

GENERAL

Seat	Moulded-vinyl seat with adjustable armrests and fore and aft sliding adjustment. Seat-pan suspension springs standard.
Fuel	Unleaded, 18.9 L capacity
Cup Holder	Yes
Caster Tyres	
48"	13 x 5 – 6, smooth tread
54", 60"	13 x 6.5 – 6, smooth tread
Drive Tyres	
48"	22 x 9.5 – 10, turf tread
54", 60"	22 x 11 – 10, turf tread

DIMENSIONS

Height: 1125.2 mm
Length: 1869.4 mm

48" Deck	
Overall width	1064.3 mm (<i>discharge chute up</i>)
Tyre-to-tyre width	1193.8 mm
Weight	378 kg
54" Deck	
Overall width	1399.5 mm (<i>discharge chute up</i>)
Tyre-to-tyre width	1320.8 mm
Weight	390 kg
60" Deck	
Overall width	1551.9 mm (<i>discharge chute up</i>)
Tyre-to-tyre width	1320.8 mm
Weight	401 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- 2 Bag Catcher (powered)
- Flex Forks™
- Light Kit
- Steering Extension Kit
- Seat Isolator Kit



MADE IN USA



HUSTLER®

FASTRAK® SDX

HUSTLER'S ENTRY-LEVEL COMMERCIAL MACHINE

The FasTrak® SDX is a true commercial grade mower, built for the prosumer or commercial operator who wants more of everything.

From zero-turning in tight spaces to covering straightaways at an industry-setting 14.5km/h. Most importantly, the FasTrak® SDX delivers a professional cut every time. The FasTrak® SDX has it all, and can do it all.



Visit hustlermower.com.au for more information



ACRES PER HOUR*

48" - 3.49

54" - 3.93

60" - 4.36

**Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.*



DOMESTIC WARRANTY

4 YEAR

1000 HOUR LIMIT

COMMERCIAL WARRANTY

4 YEAR

1000 HOUR LIMIT

**LIMITED
LIFETIME WARRANTY**
FRAME & LEADING EDGE OF THE DECK



60" deck model shown.



CUTTING WIDTHS

Side Discharge	48": 1196 mm
	54": 1348 mm
	60": 1500 mm

ENGINE

48"	Kawasaki FX691, 22 hp, 726 cc
54"	Kawasaki FX691, 22 hp, 726 cc
60"	Kawasaki FX730, 23.5 hp, 726 cc
Starter/Charging	12 Volt starter & charging system

DRIVE SYSTEM

Type	Dual hydrostatic.
Transmission	Hydro-Gear ZT3400
Brakes	Patented automatic

GROUND SPEED

Forward/Reverse	0-14.5 kph/0-8 kph
------------------------	--------------------

DECK

Construction	10 ga. fabricated
Spindle Mounts	Reinforced 11 ga double welded
Impact/Trim Areas	3/8" x 1" steel bar
Cutting Height	38.1 mm to 114.3 mm
Deck Lift	Foot-operated
Spindles	Aluminium casting with steel shafts and sealed ball bearings
Drive	Electric PTO Clutch

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.

48"	3 - 16.5" x 2.5" x .20"
54"	3 - 18.5" x 2.5" x .20"
60"	3 - 20.5" x 2.5" x .20"

Blade Tip Speed:	(at 3200 RPM engine speed)
48"	18 600 fpm
54"	18 910 fpm
60"	18 410 fpm

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

48"	12.5 mm
54"	65 mm
60"	150 mm

GENERAL

Seat	Moulded-vinyl seat with adjustable armrests and fore and aft sliding adjustment. Seat-pan suspension springs standard.
Fuel Cup Holder	Unleaded, 18.9 L capacity
Caster Tyres	Yes
48"	13 x 5 - 6, smooth tread
54", 60"	13 x 6.5 - 6, smooth tread
Drive Tyres	
48"	22 x 9.5 - 10, turf tread
54", 60"	23 x 11 - 10, turf tread

DIMENSIONS

Height: 1125.2 mm
Length: 1869.4 mm

48" Deck	
Overall width	1064.3 mm (discharge chute up)
Tyre-to-tyre width	1193.8 mm
Weight	378 kg
54" Deck	
Overall width	1399.5 mm (discharge chute up)
Tyre-to-tyre width	1320.8 mm
Weight	390 kg
60" Deck	
Overall width	1551.9 mm (discharge chute up)
Tyre-to-tyre width	1320.8 mm
Weight	401 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- 2 Bag Catcher (powered)
- Flex Forks™
- Light Kit
- Steering Extension Kit
- Seat Isolator Kit



MADE IN USA



HUSTLER®

SUPER Z®

FEATURES VX4® DECK, HEAVY DUTY HYDRAULICS.

High performance zero-turn with unsurpassed strength, reliability, speed, productivity and a warranty to match. The Super Z® defines what being a commercial mower is all about.

Visit hustlermower.com.au for more information

VX4®

TECHNOLOGY

zero
TURN
PRECISION

Images for illustrative purposes only. 60" deck model shown.

ACRES PER HOUR*

54" - 6.11
60" - 6.78
60"RD - 6.78

**Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.*



DOMESTIC WARRANTY

5 YEAR	500 HOUR LIMIT
------------------	--------------------------

COMMERCIAL WARRANTY

2 YEAR	NO HOUR LIMIT
------------------	-------------------------

LIMITED LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK



60" deck model shown.



CUTTING WIDTHS

Side Discharge	54": 1371.6 mm 60": 1524 mm
Rear Discharge	60": 1524 mm

ENGINE

54"	Kawasaki FX850, 27 hp, 852 cc
60"	Kawasaki FX850, 27 hp, 852 cc
60" RD	Kawasaki FX850, 27 hp, 852 cc
Starter/Charging	12 Volt starter & charging system

DRIVE SYSTEM

Type	Dual hydrostatic.
Pumps	21 cc Hydro-Gear PY Pumps
Wheel Motors	Parker TG310
Hydraulic Cooling	Oil cooler with 8" fan
Brakes	Patented automatic

GROUND SPEED

Forward/Reverse	0–22.53 kph/0–9.6 kph
------------------------	-----------------------

DECK

Construction	7 ga. welded steel
Spindle Mounts	Reinforced 7 ga. spindle mount discs
Impact/Trim Areas	11 ga. formed channel w/ rolled edge
Cutting Height	25.4 mm to 139.7 mm
Deck Lift	Foot-operated
Depth	5.5"
Spindles	Ductile iron casting with steel shafts and sealed ball bearings.
Drive	Electric PTO Clutch

MOWING BLADES

Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Featuring an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

54"	3 - 18.5" x 2.5" x 2.0" blade
60"	3 - 20.5" x 2.5" x 2.0" blade all extra high sail
Blade Tip Speed:	(at 3200 RPM engine speed)
54"	18 340 fpm
60"	18 630 fpm
60" RD	18 630 fpm

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

54"	25mm
60"	89mm

GENERAL

Seat	Grammer bolstered suspension seat with armrests
Fuel	Unleaded, 44.2 L capacity
Cup Holder	Yes
Caster Tyres	13 x 6.5 – 6, smooth tread
Drive Tyres	
54"	24 x 9.5 – 12, turf tread
60"	24 x 12 – 12, turf tread

DIMENSIONS

Height: 1370 mm with ROPS folded down/
1816 mm with ROPS up.
Length: 2146 mm

54" Deck	
Overall Width	1524mm (discharge chute up)
Tyre-to-tyre width	1447.8 mm
Weight	676.3 kg
60" Deck	
Overall Width	1676 mm (discharge chute up)
Tyre-to-tyre width	1447.8 mm
Weight	685 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- 3 Bag Catcher (powered)
- Electric Deck Lift
- Steering Extension Kit
- Light Kit
- Semi-Pneumatic Tyre
- Flex Forks
- Rear Anti-scalp Wheel - Single
- Rear Anti-scalp Wheel - Dual



MADE IN USA



HUSTLER®

SUPER Z® HYPERDRIVE

IN A CLASS OF ITS OWN;


Super Z® Hyperdrive is built like a tank with welded steel decks and rides like a thoroughbred at a top speed of 25.75 km/h. The HyperDrive hydraulic system is engineered to run at higher PSI levels giving you better handling with industrial grade pumps and motors. Super Z® HD features a premium seat with suspension and lumbar adjustment, combined with semi-pneumatic tyres gives you the most comfortable ride on the best ZTR on the market.



Visit hustlermower.com.au for more information

VX4®

TECHNOLOGY

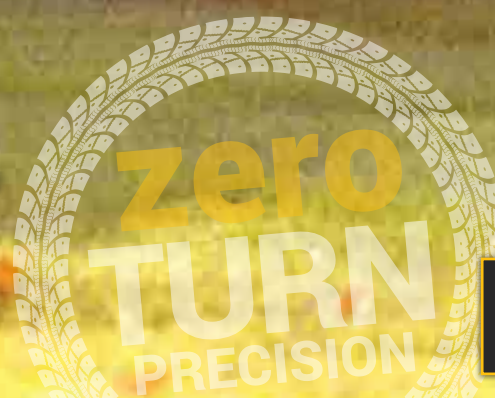

LIMITED
LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK



ACRES PER HOUR*

- 60" - 7.76
- 66" - 8.54
- 72" - 9.31
- 60"RD - 7.76

**Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.*



DOMESTIC WARRANTY

5 YEAR
500 HOUR LIMIT

5 YEAR OR 3000 HOURS ON PUMPS & MOTORS

COMMERCIAL WARRANTY

3 YEAR
NO HOUR LIMIT

3RD YEAR PARTS ONLY



DECK HEIGHT ADJUSTMENT PIN



HEAVY DUTY DECK LIFT MOUNTS WITH 4 DECK LEVELLING RODS.



FRONT CASTER WHEELS WITH MOUNTED TAPERED GREASEABLE BEARINGS



SMOOTHTRAK™ STEERING WITH PATENTED AUTO PARK-BRAKE SYSTEM

GRAMMER SUSPENSION SEAT WITH OPERATOR ISOLATION

FOLDING ROPS STANDARD

KAWASAKI FX1000 OR BRIGGS & STRATTON VANGUARD V-TWIN EFI ENGINE

44.2 L FUEL CAPACITY

DECK HEIGHT ADJUSTMENT PIN

FOOT OPERATED DECK LIFT

TOUGH FRAME, FRONT FORKS & DECK

13" CASTER TYRES

ANTI-SCALP WHEELS

HEAVY-DUTY FABRICATED DECK

26" DRIVE TYRES

CUTTING WIDTHS

Side Discharge	60": 1505 mm
	66": 1657 mm
	72": 1809 mm
Rear Discharge	60": 1505 mm

ENGINE

60"	Kawasaki FX1000, 35 hp, 999 cc
66"	Kawasaki FX1000, 35 hp, 999 cc
72"	Kawasaki FX1000, 35 hp, 999 cc
60" RD	Kawasaki FX1000, 35 hp, 999 cc
60" EFI	Briggs & Stratton Vanguard V-Twin EFI, 37 hp, 993 cc
72" EFI	Briggs & Stratton Vanguard V-Twin EFI, 37 hp, 993 cc
Starter/Charging	12 Volt starter & charging system

DRIVE SYSTEM

Type	Dual hydrostatic.
Pumps	Sauer Danfoss DDC-20 pumps
Wheel Motors	Parker TG280
Hydraulic Cooling	Oil cooler with 9" fan
Brakes	Patented automatic

GROUND SPEED

Forward/Reverse	0–25.75 kph/0–12.07 kph
------------------------	-------------------------

DECK

Construction	7 ga. welded steel
Spindle Mounts	Reinforced 7 ga. spindle mount discs
Impact/Trim Areas	11 ga. formed channel w/ rolled edge
Cutting Height	25.4 mm to 139.7 mm
Deck Lift	Foot-operated
Depth	5.5"
Spindles	Ductile iron casting with steel shafts and sealed ball bearings.
Drive	Electric PTO Clutch

MOWING BLADES

Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Featuring an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

60"	3 - 20.50" x 3.00" x .250" blade
66"	3 - 22.50" x 3.00" x .250" blade
72"	3 - 24.50" x 3.00" x .250" blade all extra high sail

Blade Tip Speed:	(at 3200 RPM engine speed)
60"	18 630 fpm
66"	18 230 fpm
72"	18 530 fpm

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

60"	63.5 mm
66"	101.6 mm
72"	203.2 mm

GENERAL

Seat	Grammer bolstered suspension seat with operator isolator platform and armrests.
Fuel	Unleaded, 44.2 L capacity
Cup Holder	Yes
Caster Tyres	13 x 6.5 – 6, smooth tread
Drive Tyres	26 x 12 – 12, turf tread

DIMENSIONS

Height: 1370 mm with ROPS folded down/
1816 mm with ROPS up.

60" Deck	
Overall width	1676 mm (discharge chute up)
Tyre-to-tyre width	1447.8 mm
Length	2146 mm
Weight	792 kg
66" Deck	
Overall width	1828.8 mm (discharge chute up)
Tyre-to-tyre width	1524 mm
Length	2174.2 mm
Weight	805 kg
72" Deck	
Overall width	1981.2 mm (discharge chute up)
Tyre-to-tyre width	1524 mm
Length	2202.1 mm
Weight	818 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- 3 Bag Catcher (powered)
- Electric Deck Lift
- Steering Extension Kit
- Light Kit
- Semi-Pneumatic Tyre
- Flex Forks
- Rear Anti-scalp Wheel - Single
- Rear Anti-scalp Wheel - Dual



MADE IN USA



HUSTLER®

HUSTLER Z™ DIESEL

DIESEL POWER TO DO ANY JOB.

The power and precision of a Hustler, the stamina of a diesel. Boasting a top speed of 19.3 kph and Hustler's exclusive SmoothTrak™ steering, the Hustler Z™ Diesel works hard and fast, making it a great addition to any commercial fleet.

Visit hustlermower.com.au for more information

VX4®

TECHNOLOGY

Images for illustrative purposes only. 60" deck model shown.



ACRES PER HOUR*

- 54" - 4.90
- 60" - 5.57
- 72" - 6.68
- 60"RD - 5.57

**Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.*



DOMESTIC WARRANTY

5 YEAR

500 HOUR LIMIT

COMMERCIAL WARRANTY

2 YEAR

NO HOUR LIMIT

LIMITED LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK

zero
TURN
PRECISION



60" deck model shown.

CUTTING WIDTHS

Side Discharge	54": 1352 mm
	60": 1505 mm
	72": 1830 mm
Rear Discharge	60": 1500 mm

ENGINE

54"	Shibaura, 25 hp
60"	Shibaura, 25 hp
72"	Shibaura, 25 hp
60" RD	Shibaura, 25 hp
Ignition	Compression
Starter/Charging	12 Volt/40 amp alternator

DRIVE SYSTEM

Type	Dual hydrostatic.
Pumps	21 cc Hydro-gear Pump
Wheel Motors	Parker TG0335
Hydraulic Cooling	Oil cooler with 8" fan
Brakes	Patented automatic

GROUND SPEED

Forward/Reverse	0–19.3 kph/0–11.2 kph
------------------------	-----------------------

DECK

Construction	7 ga. welded steel
Spindle Mounts	Reinforced 7 ga. spindle mount discs
Impact/Trim Areas	11 ga. formed channel w/ rolled edge
Cutting Height	25.5 mm to 140 mm.
Deck Lift	Foot-operated
Depth	5.5"
Spindles	Ductile iron casting with steel shafts and sealed ball bearings.
Drive	Electric PTO Clutch

MOWING BLADES

Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Featuring an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

54"	3 - 18.50" x 3.00" x .203" blade
60"	3 - 20.50" x 3.00" x .203" blade
72"	3 - 24.50" x 3.00" x .250" blade all extra high sail

Blade Tip Speed:	(at 3200 RPM engine speed)
54"	18 322 fpm
60"	18 260 fpm
72"	18 890 fpm
60" RD	18 200 fpm

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

54"	25 mm
60"	89 mm
72"	227 mm

GENERAL

Seat	Grammer bolstered suspension seat with operator isolator platform and armrests.
Fuel	Diesel, 54.5 L capacity Hydraulic Oil, 6.6 L capacity Engine Coolant, 5.7 L capacity
Cup Holder	Yes
Caster Tyres	13 x 6.5 – 6, smooth tread
Drive Tyres	54" 24 x 9.5 – 12, turf tread 60", 72" 24 x 12 – 12, turf tread

DIMENSIONS

Height: 1300 mm with ROPS folded down\
1750 mm with ROPS up

54" Deck	
Overall width	1505 mm (<i>discharge chute up</i>)
Tyre-to-tyre width	1400 mm
Length	2172 mm
Weight	746 kg
60" Deck	
Overall width	1676 mm (<i>discharge chute up</i>)
Tyre-to-tyre width	1420 mm
Length	2204.7mm
Weight	769 kg
72" Deck	
Overall width	1981 mm (<i>discharge chute up</i>)
Tyre-to-tyre width	1420 mm
Length	2296.16 mm
Weight	798 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- Steering Extension Kit
- Light Kit
- Flex Forks
- Hitch Kit
- Rear Anti-scalp Wheel - Single
- Rear Anti-scalp Wheel - Dual
- Semi-Pneumatic Tyre
- Electric Deck Lift
- Beacon Kit
- Flasher Light Kit

Images for illustrative purposes only.



MADE IN USA



HUSTLER®

SUPER 104

WIDEST AND MOST PRODUCTIVE OF ANY COMMERCIAL ZERO-TURN.

The Super 104 is an affordable broad range mower with the manoeuvrability of a zero-turn that can mow up to 84 acres in 8 hours at 16 kph and will mow where most wide-area mowers cannot.



ACRES PER HOUR*

104" - 9.24

**Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.*

VX4®

TECHNOLOGY

zero
TURN
PRECISION



DOMESTIC WARRANTY

5 YEAR	500 HOUR LIMIT
------------------	--------------------------

COMMERCIAL WARRANTY

2 YEAR	NO HOUR LIMIT
------------------	-------------------------

LIMITED
LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK



Visit hustlermower.com.au for more information



HYDRAULIC POWERED DECK AND WING LIFT ALL CONTROLLED FROM THE DRIVERS SEAT

CUTTING WIDTHS

Rear Discharge 104": 2635 mm

ENGINE

48" Kawasaki FX1000, 35 hp, 999 cc
 Starter/Charging 12 Volt starter & charging system

DRIVE SYSTEM

Type Dual hydrostatic.
 Pumps Sauer Danfoss DDC-20
 Wheel motors Parker TG0360
 Brakes Patented automatic

GROUND SPEED

Forward/Reverse 0–17.7 kph/0–12.07 kph

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

Left side 558.8 mm
 Right side 558.8 mm

GENERAL

Seat Grammer bolstered suspension seat with operator isolator platform and armrests.
 Fuel Unleaded, 45.4 L capacity
 Hydraulic Oil 11.36 L capacity
 Cup Holder Yes
 Caster Tyres 15 x 6.0 – 6, smooth tread
 Drive Tyres 26 x 12 – 12, turf tread



GRAMMER SUSPENSION SEAT WITH OPERATOR ISOLATION

FOLDING ROPS STANDARD

SMOOTHTRAK™ STEERING WITH PATENTED AUTO PARK-BRAKE SYSTEM

KAWASAKI FX SERIES COMMERCIAL ENGINE

SIMPLE DECK HEIGHT ADJUSTMENT

45.4 L FUEL CAPACITY

INTERNAL GUSSETS INSIDE FRAME FOR GREATER DURABILITY

26" DRIVE TYRES

1.5" X 3.0" FRAME

15" CASTER TYRES

ANTI-SCALP WHEELS

DECK

Construction 11 ga. fabricated
 Spindle Mounts Reinforced 7 ga
 Impact/Trim Areas 3/8" x 1" steel bar
 Cutting Height 38.1 mm to 114.3 mm
 Deck Lift Electric/Hydraulic activated
 Spindles Die cast aluminium housing 25.4 mm diameter high carbon steel shafts and sealed ball bearings.
 Drive Electric PTO Clutch

MOWING BLADES

4 Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Featuring an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

23.86" x 2.50" x .203" blade, CW cut
 23.86" x 2.50" x .203" blade, CCW cut
 20.50" x 2.50" x .203" blade, CW cut
 20.50" x 2.50" x .203" blade, CW cut

Blade Tip Speed:

15 800 fpm. Deck Drive Belt drive from engine with electric clutch to centre deck spindle. Belt drive from centre deck outer spindles to each wing. Spring tension idler and large pulleys to extend belt life.

DIMENSIONS

Height 1370 mm with ROPS folded down/1816 mm with ROPS up
 Length 2425.7 mm
 Overall width 2695 mm (wings down)
 2032 mm (wings up at gauge wheels)
 1842 mm (wings up at deck base)
 Tyre-to-tyre width 1532 mm
 Weight 1065.9 kg

OPTIONAL ACCESSORIES

- Mulch Kit
- Light Kit
- Steering Lever Extension Kit

RESIDENTIAL

RAPTOR

RAPTOR SD

RAPTOR FLIP-UP

FASTRAK

FASTRAK SDX

X-ONE

MODEL		42"	52"	36"	42"	48"	54"	48"	48"	54"	60"	48"	54"	60"	48"	54"	60"
ENGINE	ENGINE	Kawasaki FR651 Kawasaki FR691		Kawasaki FR651		Kawasaki FR691		Kawasaki FR651	Kawasaki FR691	Kawasaki FR691	Kawasaki FR730	Kawasaki FX691	Kawasaki FX691	Kawasaki FX730	Kawasaki FX691	Kawasaki FX850	Kawasaki FX850
	HORSE POWER (hp)	21.5	23	21.5	21.5	23	23	23	23	23	24	22	22	23.5	22	27	27
	DISPLACEMENT (cc)	726	726	726	726	726	726	726	726	726	726	726	726	726	726	852	852
	STARTER	12 Volt		12 Volt				12 Volt	12 Volt				12 Volt			12 Volt	
FUEL TYPE	Unleaded		Unleaded				Unleaded	Unleaded				Unleaded			Unleaded		
DRIVE SYSTEM	TYPE	Dual Hydrostatic		Dual Hydrostatic				Dual Hydrostatic	Dual Hydrostatic				Dual Hydrostatic			Dual Hydrostatic	
	TRANSMISSION	Hydro-gear EZT		Hydro-gear ZT2800				Hydro-gear EZT	Hydro-gear ZT3100				Hydro-gear ZT3400			Parker TF0240 Motor & Hydro-gear PK12 cc Pump	
	SPEED FORWARD (kph)	0-10.46		0-12.1				0-11.2	0-12.9				0-14.5			0-17.7	
	SPEED REVERSE (kph)	0-6.4		0-6.4				0-6.4	0-8				0-8			0-9.6	
DECK	CONSTRUCTION	Welded 11 ga		Welded 11 ga				Welded 11 ga	Welded 10 ga				Welded 10 ga			Welded 10 ga	
	SPINDLE HOUSING	Die Cast Alloy		Die Cast Alloy				Alloy casting	Alloy casting				Alloy casting			Ductile iron casting	
	BLADE TIP SPEED (fpm)	16 700	16 600	18 500	18 500	18 600	18 900	18 600	18 600	18 910	18 410	18 600	18 910	18 410	18 580	18 340	18 410
	BLADES	2	3	2	2	3	3	3	3	3	3	3	3	3	3	3	3
	BLADE ENGAGEMENT	Electric		Electric				Electric	Electric				Electric			Electric	
	CLUTCH SIZE (ft,lb)	105	105	105	105	105	105	105	125	125	125	200	200	200	200	200	200
	CUTTING WIDTH (mm)	1066	1320	914.4	1030	1219	1371	1219	1196	1348	1500	1196	1348	1500	1196	1348	1500
	CUTTING HEIGHT (mm)	38.1-114.3		38.1-114.3				38.1-114.3	38.1-114.3				38.1-114.3			25.4-139.7	
DISCHARGE	Side		Side				Side	Side				Side			Side		
DECK LIFT	Hand-operated		Foot-operated				Electric/Hydraulic	Foot-operated				Foot-operated			Foot-operated		
ANTI-SCALP WHEELS	1	2	1	1	3	3	4	3	3	3	3	3	3	3	3	3	3
GENERAL	FUEL CAPACITY	11.36 L		11.36 L				11.36 L	18.9 L				18.9 L			38.9 L	
	FRONT CASTOR TYRE	11"		13"				9"	13"				13"			13"	
	REAR DRIVE TYRE	18"		20"				20"	22"				22"	23"	23"	24"	
	SEAT	Moulded Vinyl		Vinyl High Back				Vinyl High Back	Vinyl High Back				Vinyl High Back			Bolstered Grammer Suspension with operator isolation and armrests	
	FOLDABLE ROPS	N/A		N/A				N/A	Standard				Standard			Standard	
SAFETY	Operator Presence		Operator Presence				Operator Presence	Operator Presence				Operator Presence			Operator Presence		
HOUR METER	N/A		N/A	Standard	Standard	Standard	Standard	Standard				Standard			Standard		
DIMENSIONS	HEIGHT (mm) ROPS UP	N/A		N/A				N/A	1673.35				1673.35	1686.05	1686.05	1724.7	
	HEIGHT (mm) ROPS DOWN	990		1066				1084.6	1158.75				1158.75	1171.45	1171.45	1333.5	
	LENGTH (mm)	1854		1854				1763	1869.4				1869.4			2052.3	
	WIDTH (mm) DISCHARGE CHUTE UP	1128	1356.3	947.4	1128	1244	1397	1244	1064.3	1399.5	1551.9	1064.3	1399.5	1551.9	1358.9	1505	1680
	TYRE TO TYRE W (mm)	1040	1040	972.8	1040	1040	1168	1110	1193.8	1320.8	1320.8	1193.8	1320.8	1320.8	1193.8	1295.4	1376
WEIGHT (kg)	229	236.8	265.8	269	284.8	294.8	340	378	390	401	378	390	401	544	548	571	
WARRANTY*	ENTIRE PRODUCT	3 yrs, no Hr Limit		3 yrs or 300 hrs				4 yrs or 400 hrs	4 yrs or 400 hrs				4 yrs or 1000 hrs			5 yrs or 500 hrs	
	LIFETIME	N/A		N/A				N/A	Frame & leading edge of deck				Frame & leading edge of deck			Frame & leading edge of deck	
	TRANSMISSION	3 yrs, no Hr Limit		3 yrs or 300 hrs				4 yrs or 400 hrs	4 yrs or 400 hrs				4 yrs or 1000 hrs			5 yrs or 500 hrs	
	SPINDLES	3 yrs, no Hr Limit		3 yrs or 300 hrs				4 yrs or 400 hrs	4 yrs or 400 hrs				4 yrs or 1000 hrs			5 yrs or 500 hrs	
	ENGINE	3 yrs		3 yrs				3 yrs	3 yrs				3 yrs			3 yrs	

RESIDENTIAL & COMMERCIAL

		SUPER Z [®]			SUPER Z [®] HYPERDRIVE					HUSTLER Z [™] DIESEL				SUPER 104	
MODEL		54"	60"	60" RD	60"	66"	72"	60" RD	60" EFI	72" EFI	54"	60"	60" RD	72"	104"
ENGINE	ENGINE	Kawasaki FX850			Kawasaki FX1000				B&S Vanguard V-Twin EFI		Shibaura			Kawasaki FX1000	
	HORSE POWER (hp)	27			35				37		25			35	
	DISPLACEMENT (cc)	852			999				993		1134			999	
	STARTER	12 Volt			12 Volt						12 Volt			12 Volt	
DRIVE SYSTEM	FUEL TYPE	Unleaded			Unleaded						Diesel			Unleaded	
	TYPE	Dual Hydrostatic			Dual Hydrostatic						Dual Hydrostatic			Dual Hydrostatic	
	TRANSMISSION	Parker TG310 Wheel Motors & Hydro-gear PY 21 cc Pumps			Parker TG0280 Wheel Motors & Sauer Danfoss DDC-20						Parker TG0335 Wheel Motors & Hydro-gear 21 cc Pump			Parker TG0360 Wheel Motors & Sauer Danfoss DDC-20	
	SPEED FORWARD (kph)	0-22.53			0-25.75						0-19.3			0-17.7	
DECK	SPEED REVERSE (kph)	0-9.6			0-12.07						0-11.2			0-12.07	
	CONSTRUCTION	Welded 11ga. + 11ga. + 7ga			Welded 11ga. + 11ga. + 7ga						Welded 11ga. + 11ga. + 7ga			Welded 11 ga	
	SPINDLE HOUSING	Ductile Iron Casting			Ductile Iron Casting						Ductile Iron Casting			Ductile Iron Casting	
	BLADE TIP SPEED (fpm)	18 340	18 630	18 630	18 630	18 230	18 530	18 630	18 630	18 530	18 322	18 260	18 200	18 890	15 800
	BLADES	3	3	3	3	3	3	3	3	3	3	3	3	3	4
	BLADE ENGAGEMENT	Electric			Electric						Electric			Electric	
	CLUTCH SIZE (lb)	200	200	200	250	250	250	250	250	250	250	250	250	250	250
	CUTTING WIDTH (mm)	1371.6	1524	1524	1505	1657	1809	1505	1505	1657	1352	1505	1500	1830	2635
	CUTTING HEIGHT (mm)	25.4 -139.7			25.4 -139.7						25.5-140			25.5 -139.7	
	DISCHARGE	Side	Side	Rear	Side	Side	Side	Rear	Side	Side	Side	Side	Rear	Side	Rear
	DECK LIFT	Foot-operated			Foot-operated						Foot-operated			Hydraulic Powered	
	GENERAL	ANTI-SCALP WHEELS	3	3	3	3	3	3	3	3	3	3	3	3	3
FUEL CAPACITY		44.2 L			44.2 L						54.5 L			45.4 L	
FRONT CASTOR TYRE		13"			13"						13"			15"	
REAR DRIVE TYRE		24"			26"						24"			26"	
SEAT		Bolstered Grammer Suspension			Bolstered Grammer Suspension with operator isolation and armrests										
FOLDABLE ROPS		Standard			Standard						Standard			Standard	
DIMENSIONS	SAFETY	Operator Presence			Operator Presence						Operator Presence			Operator Presence	
	HOUR METER	Standard			Standard						Standard			Standard	
	HEIGHT (mm) ROPS UP	1816			1816						1750			1816	
	HEIGHT (mm) ROPS DOWN	1370			1370						1300			1370	
WARRANTY*	LENGTH (mm)	2146			2146	2174.2	2202.1	2146	2146	2202.1	2172	2204.7		2296.16	2425.7
	WIDTH (mm) DISCHARGE CHUTE UP	1524	1676		1676	1828.8	1981.2	1676	1676	1981.2	1505	1676	1676	1981	2695 (wings down)
	TYRE TO TYRE W (mm)	1447.8			1447.8	1524	1524	1447.8	1447.8	1524	1400	1420	1420	1420	1532
	WEIGHT (kg)	676.3	685		792	805	818	792	792	818	746	769	769	798	1065.9
ENTIRE PRODUCT	ENTIRE PRODUCT	5 yrs or 500 hrs			5 yrs or 500 hrs						5 yrs or 500 hrs			5 yrs or 500 hrs	
	LIFETIME	Frame & leading edge of deck			Frame & leading edge of deck						Frame & leading edge of deck			Frame	
	TRANSMISSION	5 yrs or 500 hrs			5 yrs or 3000 hrs						5 yrs or 500 hrs			5 yrs or 500 hrs	
	SPINDLES	5 yrs or 500 hrs			5 yrs or 500 hrs						5 yrs or 500 hrs			5 yrs or 500 hrs	
	ENGINE	3 yrs			3 yrs						3 yrs			3 yrs	



PLP shall not be liable for technical or editorial errors or omissions contained herein, nor for incidental or consequential damages resulting from furnishing this material. The information is provided "as is" without warranty of any kind and is subject to change without notice. PLP also reserves the right to revise the content of this document at any time without prior notice. For more information regarding unit specs and availability, please see your local dealer. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording or storing in a retrieval system, or translated into any language in any form without prior written permission of PLP. Copyright © 2018 Roy Gripske & Sons Pty. Ltd. All rights reserved. 955. Last Updated June 2018.

Photographic images are for illustrative purposes only.

1 300 363 027 | 1 800 33 22 13



[hustlermower.com.au](https://www.hustlermower.com.au)