

# HIKOKI

HIGH PERFORMANCE POWER TOOLS

Power tools  
catalogue

2018-2019



# Innovation never stops

Ever since 1948 we've been designing and developing high performance power tools. For over 70 years our Japanese engineers have utilized their technological knowledge, skills and experience to constantly improve our power tools. Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details that ensures the professional in finishing every single job as easy as possible. That's what drives us and keeps us one step ahead.

**We are proud to introduce our new 2018 – 2019 catalogue. Have a close look at this year's range of HiKOKI high performance power tools, all presented in a fresh new look. You'll see some classic designs, as well as exciting new products featuring the latest technologies that our in-house designers and engineers have been developing.**



We have committed to accelerate growth alongside a dynamic new partner as we pursue our goal to become a global leader in power tools. As part of this new chapter, following our company name change to Koki Holdings in June 2018, I'm thrilled to announce that effective October 2018, our current brand which has been familiar with "HITACHI" will become a new brand known as "**HiKOKI**".

Our advance into this new stage of development is, for me, an occasion to reflect upon our prestigious 70-year history. During my tenure, I have grown in my conviction that our company's success rests upon three core pillars: highly innovative technology, high reliability, and strong business growth.

The first of these pillars - highly innovative technology - is the foundation which inspires us in everything we create and deliver for our customers. Our industry-leading technological prowess has been cultivated over the decades thanks to the tireless day-to-day efforts of our predecessors and continues today through all of our current employees. We currently hold over 2,500 patented technologies, many of which have earned prestigious awards around the world. That's why the "Hi" in the "HiKOKI" brand name refers to our "highly innovative technologies."

High reliability is our company's second pillar. Over the past 70 years, we have delivered products which consistently meet the needs of our customers and partners at the point of purchase and over time. We have achieved this by providing globally recognized "Japanese-quality" as well as earnest service, all in pursuit of customer satisfaction and convenience. Our new "HiKOKI" brand name also embodies this commitment to high reliability.

The third pillar supporting our company is strong business growth. We have gained a robust partner in KKR, one of the world's preeminent private equity firms. Partnering with KKR has enabled us to become more aggressive than ever, not only in Japan but also in the global market. We are deepening our organizational and business diversity, as well as expanding our operations through M&A activities. This is all a fundamental driver of our ongoing drive to generate solid growth.

Specifically, we aim to achieve sales of 300 billion yen in fiscal year 2020. As one of our growth strategies, we will consider M&A involving companies with superior sales, development and procurement capabilities, as well as outstanding production technologies. In Asia, we will expand our lineup of products that fit market needs and strive to reinforce our sales structure. In addition, we aim to build upon our advanced technology development efforts, showcased by our new **MultiVolt** batteries, into a platform for lithium-ion batteries that reaches beyond power tools, proactively cultivating new fields and markets, as a pioneer of new era in cordless tool "Cordless 2.0." To generate new corporate value, we will naturally embrace human resource diversity as we work toward organizational and business diversification. In doing so, we will become a more multifaceted, comprehensive power tools manufacturer in end markets around the world.

Koki Holdings originated in Japan and has conscientiously pursued the path of manufacturing. Age-old Japanese wisdom has it that to accomplish something important, we must apply heart, technique and physical ability. We will now engage these essential elements of Japan's cultural DNA as we pursue reliability, technology and growth in building a global organization, developing our businesses, and continuing to grow into a truly global company.

**Osami Maehara**

President & Representative Director  
Koki Holdings Co., Ltd.

## Safety

Double insulation power tools, indicated by the double square mark, can be operated without external grounding. Every HiKOKI power tool is designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

## Power Input

HiKOKI power tools employ series motors whose modern design is based on many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 240V.

## General Precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children, away from the tool.
4. Wear eye protection to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts are properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at proper regular intervals by an authorized Service Centre.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Centre for repair and/or part replacement.
15. DO NOT use the power tool for other application than those specified in the handling instructions.
16. DO NOT use the tool for work beyond its prescribed capability.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in personal protective clothing, shoes and equipment.
25. Always keep the work area well-lit and in good order.
26. When not in use, store the power tool in a dry place.
27. DO NOT stare into LASER beam.

## Notes

- HiKOKI Power Tools Australia reserves the right to change specifications of parts and accessories of HiKOKI power tools without notice.
- Figures of battery capacity are nominal values.
- Some models in this catalogue are shown with optional accessories and fasteners such as screw, nail, bit, socket, blade, battery and grinding wheel.
- Product images are for display purposes only.
- Accessories are not included unless otherwise stated.
- Not all items shown in this catalogue are held in stock by retailers at all times, orders are subject to product availability at time of purchase.
- Product information and specifications should be confirmed at time of purchase.
- Errors & Omissions Excepted.



# HIKOKI MultiVolt. 36V battery power compatible with your 18V tools.\*

This is the technical advance that trade professionals have been waiting for.



A next generation battery system which offers the ultimate flexibility of instantly switching from powering 36V tools to powering virtually every one of our 18V tools.

HIKOKI MultiVolt. It's AC Power with DC freedom now made even better by a level of convenience and superior technology you won't get from other manufacturers.

Double voltage supply in one battery means you simply snap it into place and power on, regardless of whether you're using 36V or 18V tools.

This MultiVolt BSL 36A18 battery is compact and lightweight. In fact, it's almost the same size and weight as an existing 18V battery. However, when paired with 36V tools, it delivers electric class cordless power.

Now, whether you're working with 18V or 36V, with one quick click you're powering on.

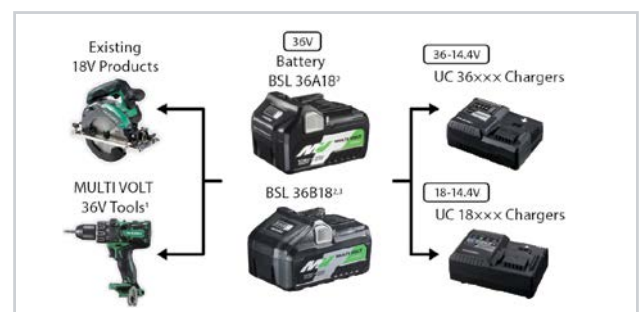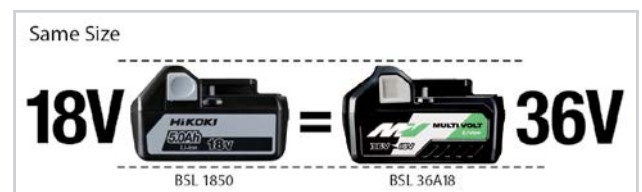

\*References: 1. Not compatible with the following existing batteries: BSL3620/3625/3626/3660, BSL18xx and BSL14xx series. 2. Not compatible with the existing 36V products that are compatible with BSL3620, BSL3625, BSL3626 or BSL3660. 3. Not compatible with the 14.4-36V UC36YRSL charger and the following 18V tools: AW18DBL/C18DBL/R18DSAL/UB18DGL/UF18D-SL/UF18DSAL/UR18DSL/UR18DSAL/UR18DSDL.





## Nail a more cost-effective solution with HiKOKI Gasless Nailers.

Now as fast as traditional gas-driven nailers but safer, cleaner, easier and far more cost effective to use.


Not to mention much less noisy and more environmentally friendly.

Presenting HiKOKI Gasless Nailers, a great example of HiKOKI innovation in action. The secret lies in combining cordless and pneumatic technology in a unique compressed air driven system that's powerful, fast, portable and lightweight.

With every nail being driven by compressed air, there's no need for the hassle or expense of replacing gas cells. Given that gas nailers are approximately 50% more expensive to run, it adds up to an amazing operating saving over the life of your tool.

Furthermore, there are no combustion chambers to regularly clean and fewer parts to manage, so your service, down time and maintenance costs will all be drastically reduced.

With a HiKOKI Gasless Nailer, your safety is paramount because an automatic trigger lock eliminates unwanted firing. Plus, the shock absorption system incorporated throughout also makes them the most comfortable nailers you've ever used.

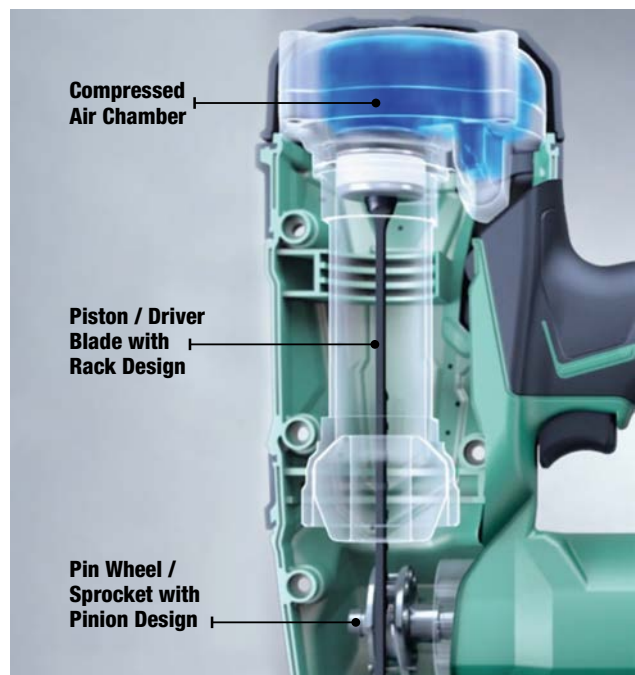



## Trust HiKOKI to be rated superior for dust and water resistance.

IP56 is an independent stamp of quality that HiKOKI Power Tools hold as a bench mark.

In technical terms, the IP code or 'International Protection' is a standard developed by the International Electrotechnical Commission (IEC) to measure the degrees of protection offered by electrical equipment enclosures against the ingress of solid foreign objects like dust or the ingress of water to hazardous parts.

In real terms, every tradie knows that two potential onsite enemies threatening operating efficiency and long life are dust and water getting into the tool's enclosure.

That's why it's so reassuring to see the IP56 sticker on the side of your HiKOKI tool.

**IP** = International Protection

**IP 5X**  
Degrees of protection against access to hazardous parts and ingress of solid foreign objects.

**5** = Dust-protected: Ingress of dust is not totally prevented, but dust shall not penetrate in a quantity to interfere with satisfactory operation of the apparatus or to impair safety

**IP X6**  
Degrees of protection against ingress of water. Water projected in powerful jets against the enclosure from any direction shall have no harmful effects.

Note: Our IP56-compliant products are designed to withstand the effects of dust and water, but there is no guarantee that they will not malfunction. Do not use or leave the machine in locations where it is subject to excessive amounts of dust or it is submerged in water or subject to rainwater. (Only the main unit conforms to the IP56 protection class ratings when equipped with a battery.)

**IP56**





# Power on long and strong with HiKOKI brushless motor corded tools.

A HiKOKI technical advancement. After pioneering the use of brushless motors in cordless tools, now we've applied their benefits to electric corded tools with astonishing results.

Get your hands on a compact and lightweight range of tools with really heavy-duty power. By reducing the number of moving parts in the motor we've decreased tool size and weight but increased power output.

HiKOKI brushless AC motors deliver greater durability and longer life even under heavy use. There are no carbon brushes to regularly replace and no risk of armature burnout, layer short or commutator wear.

While the electronic circuit board is silicone-coated to protect from dust.

Because brushless motors run cooler, look forward to stable performance even when there's voltage drop from using long extension cords. Equipped with a highly efficient inverter circuit, HiKOKI AC brushless motors are compatible with engine generators that don't have an onboard inverter.

	<b>Long Lifetime, Maintenance-free</b>		<b>Compatible with Engine Generators<sup>1</sup></b>
	<b>Compact, Lightweight</b>		<b>Stable Performance during Voltage Drops<sup>1</sup></b>

Reference: 1. The features of the AC (corded) brushless motor tools only.




**BRUSH  
LESS**  
Brushless Motor

# Multiple Protection Circuit (MPC)



A very clever feature of HiKOKI Li-ion batteries. MPC protects against battery failure and protects the tool it's powering by guarding against overheating and overloading. Plus, the multiple protection cell continuously monitors every cell in the battery. In the event of a jam or overload, MPC overload protection stops the tool instantly. MPC also extends battery life by protecting against over charge and over discharge.

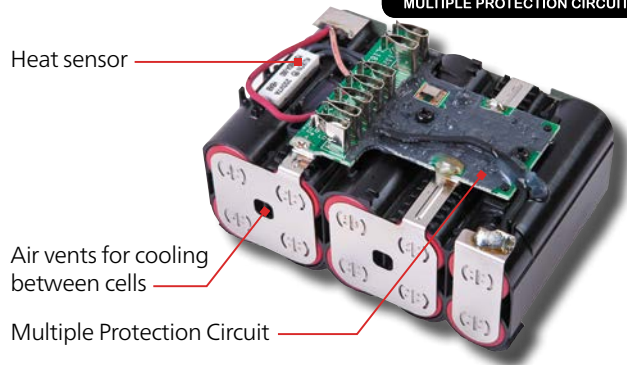

# Reactive Force Control (RFC)



With HiKOKI Power Tools your safety and well-being comes first. Reactive Force Control (RFC) has been developed and designed to sense when a tool bit is overburdened suddenly during operation.


When such an event occurs, RFC stops the motor instantly to reduce dangerous twisting and jerking of the main unit helping to safeguard operator safety.



# User Vibration Protection (UVP)



Our policy is to design tools with maximum inbuilt protection against excessive vibration, whether equipping them with spring-operated dynamic vibration absorbers or building-in special, vibration-absorbing handles. Not only is UVP good for operator safety by helping to safeguard against White Knuckle Syndrome, it's good for business. After all, the higher the degree of comfort and ease of use, the more efficient an operator can be for longer.

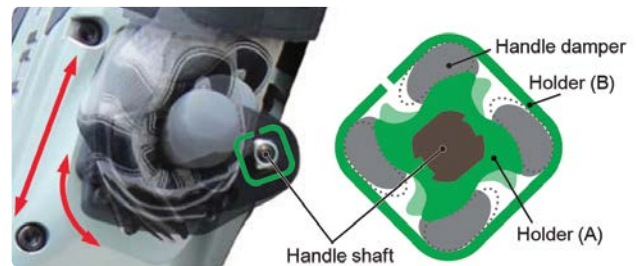

# Low Vibration Handle (LVH)



The tougher the job the more you'll appreciate the highly evolved HiKOKI Low Vibration Handle (LVH) feature. Designed as a dual action system, the upper handle section houses a coiled spring and counter balance weight while the lower section employs a specially designed hinge to help minimise vibration.

Reducing vibration also helps reduce operator fatigue which helps extend usage time.



# Lithium Ion (Li-ion) Batteries



Experience less weight and more run time with HiKOKI Lithium ion batteries. Weighing up to 40% less than their Ni-Cd and Ni-MH counterparts, these lightweight batteries make for lighter tools with greater operator portability. Each Lithium ion cell can store considerably more energy than older style battery technology giving you considerably increased run time. They're good for the job and for your business.




# Aluminium Housing Body (AHB)



AHB is the feature to look for when you want outstandingly robust and highly durable power tools. In effect, the motor is shielded by a double protective armour consisting of a stator holder contained within a die-cast outer aluminium housing body (AHB).

This results in the durability of both the motor and the tool body being remarkably improved. AHB is only available on selected HiKOKI tools.

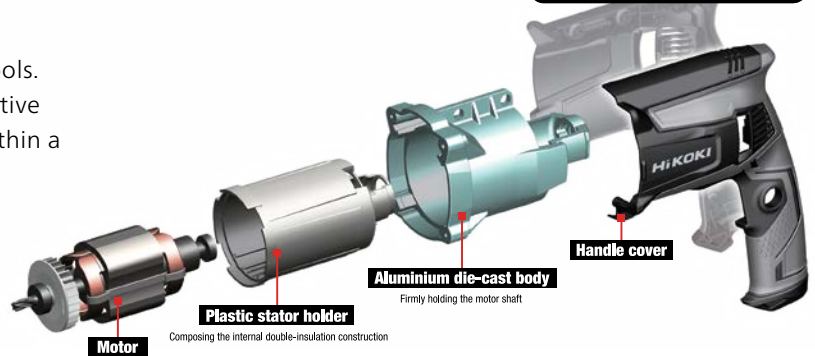


# Triple Hammer



Three strikes and vibration is on the way out. Designed by HiKOKI with three hammers, the triple hammer reduces vibration by making three impacts per rotation instead of the conventional two.

The results are greater operator comfort and ease of use with less screw head slippage. An exceptionally well balanced and ergonomic power tool.




**CONVENTIONAL**  
2pcs Hammer claw  
2 hitting points



**TRIPLE HAMMER**  
3pcs Hammer claw  
3 hitting points

# Auto Mode

Auto Mode is the intelligent electronic process that works in conjunction with HiKOKI cordless brushless motors. Auto Mode conserves energy and regulates power based on need, automatically adjusting power as the load increases or decreases. Auto Mode works to optimise operation by reducing vibrations and operating noise and helping increase battery run time.

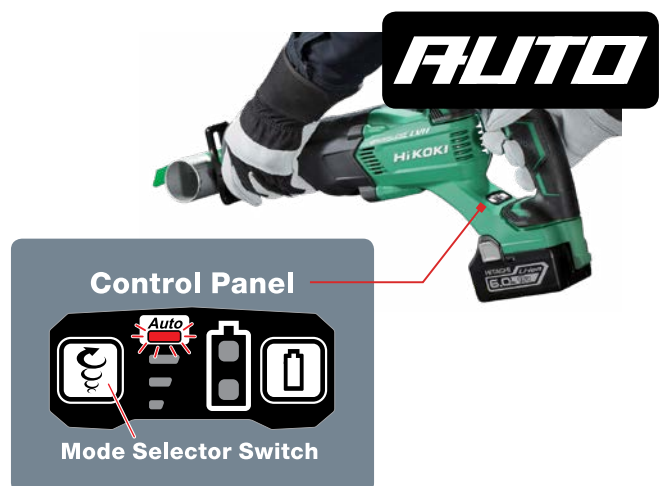

**Contents.**  
**Everything**  
**to reach**  
**the highest**  
**performance.**

## Introduction

## HiKOKI Service

### Technologies

MultiVolt	6
Gasless	7
IP56	8
Brushless	9
Multiple Protection Circuit (MPC)	10
Reactive Force Control (RFC)	10
User Vibration Protection (UVP)	10
Low Vibration Handle (LVP)	10
Lithium Ion Batteries	11
Aluminium Housing Body (AHB)	11
Triple Hammer	11
Auto Mode	11

### Cordless

MultiVolt	18
MultiVolt Combo	26
18Volt	31
Accessories	52

### Pneumatic

Nailers	58
Wrenches	61
Sander	62

### Drilling

Drills	64
--------	----

### Rotary & Demolition

Rotary Hammers	70
Demolition Hammers	74

### Fastening

Screw Drivers	78
Impact Wrenches	79

### Grinding & Cutting

Angle Grinders	82
Cut Off Saw	89
Nibbler	90
Accessories	91

### Polishing & Sanding

Sanders	94
Polisher	97

### Sawing

Circular Saws	100
Compound Mitre Saws	102
Jig Saws	104
Multi Tool	105
Accessories	105

### Planing & Routing

Planers	108
Router	109

### Air Displacement

Heat Guns	112
Vacuums	113
Vacuum Accessories	114

### Outdoor Power Equipment

High Pressure Washers	116
Petrol Products	117
Accessories for High Pressure Washers	118

### Accessories

Drilling & Driving	120
Demolition Bits	121
Grinding	121
Saw Blades	122

### Major Parts List

Cordless	123
AC Tools	124

# Index

## A

---

AW130	116
AW150	116
AW18DBL	47

## B

---

B16RM	65
BSL1830C	52
BSL1860	52
BSL18UA	49
BSL3660	52
BSL36A18	52
BSL36B18	52

## C

---

C10FCE2	102
C10FSB	103
C18DBAL	43
C18DBL	43
C18DSL	44
C3607DA	24
C3610DRA	23
C7MFA	100
C7UR	100
C7YA	101
C8FSE	102
C9SA3	101
CB18DBL	45
CC14SF	89
CE18DSL	40
CH18DSL	47
CH55Y	117
CJ18DSL	44
CJ90VST	104
CM75EBP	117
CN16SA	90
CN18DSL	40
CR18DBL	42

CR18DSL	42
CR36DA	24
CV18DBL	46
CV350V	105

## D

---

D13VG	64
D13VL	64
DB3DL2	51
DH18DBL	33
DH18DSL	33
DH26PC	70
DH28PC	70
DH36DMA	19
DH36DPC	19
DH40MC	72
DH40MEY	72
DH45MEY	73
DH52MEY	73
Diamond Wheels	121
DN18DSL	31
DS18DBL2	32
DS36DA	18
Dust Bags	98
Dust Extractor Adaptors	106
Dust Extractors	33
Drill and Driver Bit Set	120
DV16VSS	66
DV18DBL2	32
DV18DJL	31
DV20VD	67
DV22V	67
DV36DA	18

## E

---

Easy Bevel for 125mm Grinder	121
EBM315	52
ET36A	52

## F

---

FCJ65V3	104
Fibre Cement Blade	122
Flanges	105
Framer Combos	30
FSV10SA	94

## G

---

G10SR4	84
G13BY	82
G13SB3	84
G13SC2	85
G13SE2	85
G13SR4	84
G13VE	83
G13YC2	85
G18DBBAL	41
G18DBL	41
G18DSL	41
G18UDY	86
G23ST	86
G23ST	86
G23UB2	87
G23UDY	87
G3613DA	22
G3613DB	22
GP252	88
GP3V	88
GP5V	88
Grinding & Cutting Accessories	91
Guides	105

## H

---

H41ME	74
H45MEY	74
H60MEY	75
H65SB3	75
H90SG	76

Hammer Grease	76
High Pressure Washers Accessories	118

## I

Impact Socket and Bit Set	120
---------------------------	-----

## J

Jig Saw Blade Set	122
-------------------	-----

## K

KC36D13P	29
KC36D4P	29
KC36DBDL	27
KC36DDBL	28
KC36DPL	27
KC36DRBL	28

## M

M12SE	109
Metal Cutting Wheels	121
Mitre Saw Dust Bags	106

## N

N18DSL	37
N3804AB3	58
NH18DSL	37
NR1890DBCL	39
NR90AD	59
NT1850DBSL	38
NT1865DBAL	39
NT1865DBSL	38
NT50AE2	58
NT65M2	58
NT65MA4	59
NV65AF3	60

## P

P18DSL	46
P20SF	108
Planer Blades	122

## R

R18DSAL	48
R18DSL	48
RB18DSL	48
RB27EAP	117
Reciprocating Saw Blade Set	122
RH600T	112
RH650V	112
RP250YDL	113
RP300YDL	113
Rubber Pads	121

## S

Sander & Polisher Attachments	98
Screw Drivers Accessories	78
SB8V2	97
Side Handles	105
Site Bags	122
SP18VA	97
Stackable Case Inserts	55
Stackable Cases	52
Starter Packs	26
SDS Plus Drill Set	120
SV12SG	94
SV13YA	95
SV13YB	95
SV15A	62
SV15YC	96

## T

Timber Saw Blades	122
-------------------	-----

## U

UB18DGL	49
UB18DJL	49
UC18YML2	52
UC18YSL3	52
UC36YSL	52
UC3SFL	52
UR18DSAL	50
UR18DSDL	50
UR18DSML	51

## V

Vacuum Accessories	114
--------------------	-----

## W

W8VB2	78
WF18DSL	35
WH18DBDL2	34
WH18DSDL	34
WH36DB	20
WR14A	61
WR16SE	79
WR18DBDL2	36
WR18DSDL	36
WR18DSHL	36
WR22SE	80
WR25SE	80
WR27A	61
WR36DA	21
WR36DB	21
WW10A	62
WW8A	62



**6** YEAR  
POWER TOOLS  
WARRANTY\*

## OUR BEST WARRANTY EVER. GUARANTEED.

Get your work done faster and easier, safe in the knowledge HiKOKI Power Tools are manufactured to exacting, world class standards. All backed by the peace of mind of our industry-leading **6 Year Warranty**†. It's one more reason why you can have complete confidence in the tools you use, and the company who backs them. HiKOKI has over 70 years of power tool experience and an unmatched track record of innovation as Hitachi. Visit [hikokipowertools.com.au](http://hikokipowertools.com.au)

**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS

\*6 year warranty on selected products with online registration.  
For details visit [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)



# 01 Cordless



## DV36DA(HRZ) 36V Brushless Impact (Hammer) Driver Drill

Available Kit and Naked



- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch



### Specifications

Capacity	Masonry	20mm
Capacity	Wood	102mm
	Steel	16mm
No load speed	0 - 500 / 0 - 2,100 (min-1)	
No load impact rate	0 - 31,500 (min-1)	
Max. torque	Hard	138Nm
	Soft	64Nm
Weight	2.7kg (with BSL36A18 battery)	
Length	204mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, belt hook, driver bit and stackable case	



Naked: DV36DA(H4Z)



## DS36DA(HRZ) 36V Brushless Driver Drill

Available Kit and Naked



- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch



### Specifications

Capacity	Wood	102mm
	Steel	16mm
No load speed	0 - 500 / 0 - 2,100 (min-1)	
Max. torque	Hard	138Nm
	Soft	64Nm
Weight	2.7kg (with BSL36A18 battery)	
Length	204mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, belt hook, driver bit and stackable case	



Naked: DS36DA(H4Z)



## DH36DPC(HRZ) 36V Brushless SDS Plus Rotary Hammer with Quick Release Chuck

Available Kit and Naked



- RFC (Reactive Force Control)
- 3 mode: rotation + hammering, hammer only and rotation only
- Electronic 4 mode speed adjustment
- Quick release chuck allows switching between SDS plus and 13mm keyless
- Neutral lever allows for multiple chisel positions
- Optional dust extraction unit 402934



### Specifications

Capacity	Masonry	28mm
	Wood	32mm
	Steel	13mm
No load speed	0 - 1,100 (min-1)	
Impact rate	0 - 4,300 (min-1)	
Chuck type	Quick release SDS Plus / Quick release 13mm metal keyless chuck	
Weight	4.2kg (with BSL36A18 battery)	
Length	383mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, depth gauge and stackable case. Drill bit not included.	



Naked: DH36DPC(H4Z)



## DH36DMA(HAZ) 36V Brushless SDS Max Rotary Hammer

Available Kit and Naked



- 8.5 joules high impact energy
- 2 mode: rotation + hammering and hammer only
- Electronic 4 mode speed adjustment
- Neutral lever allows for multiple chisel positions
- LVH (Low Vibration Handle)
- RFC (Reactive Force Control)



### Specifications

Capacity	Concrete - drill bit	40mm
	Concrete - core bit	105mm
No load speed	260 - 590 (min-1)	
Impact rate	1,420 - 2,860 (min-1)	
Impact energy	8.5j	
Chuck type	SDS Max	
Weight	7.9kg (with BSL36B18 battery)	
Length	484mm	
Battery type	BSL36B18 : Li-ion MultiVolt (Battery B)	
Standard accessories	2 x BSL36B18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, depth stopper, grease pack and carry case. Drill bit not included.	



Naked: DH36DMA(H4Z)



# Dust and water resistance.

Every tradie knows that two potential onsite enemies threatening operating efficiency is dust and water getting into the tool's enclosure. That's why it's so reassuring to see the IP56 sticker on the side of your HIKOKI tool.



## WH36DB(HRZ) 36V Brushless Impact Driver

Available Kit and Naked



4966376321520

- Triple hammer anvil reduces vibration and "cam-out"
- IP56 dust and water resistant
- 4 step tightening mode selector
- Exceptional ergonomics

### Specifications

Capacity	Bolt	M5 - M18
	High tension bolt	M5 - M14
	Screw	M4 - M10
Max. torque	210Nm	
	Soft mode	0 - 900 (min-1)
No load speed	Normal mode	0 - 2,900 (min-1)
	Power mode	0 - 2,900 (min-1)
	S mode (Self drilling)	0 - 2,900 (min-1)
	Soft mode	0 - 2,000 (min-1)
Impact rate	Normal mode	0 - 4,100 (min-1)
	Power mode	0 - 4,100 (min-1)
	S mode (Self drilling)	0 - 2,200 (min-1)
	Soft mode	0 - 2,200 (min-1)
Weight	1.6kg (with BSL36A18 battery)	
Length	127mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case	



Naked: WH36DB(H4Z)



4966376321513

## WR36DB(HRZ) 36V Brushless High Torque 12.7mm Impact Wrench

Available Kit and Naked



- 1,650Nm high torque performance
- IP56 dust and water resistant
- 4 step tightening mode selector
- Highly durable hammer case

### Specifications

Capacity	Bolt	M12 - M30
	High tension bolt	M10 - M24
Max. torque	Tightening	1,050Nm
	Nut busting	1,650Nm
Square drive	12.7mm (1/2")	
	High mode	0 - 1,500 (min-1)
No load speed	Medium mode	0 - 1,200 (min-1)
	Low2 mode	0 - 900 (min-1)
	Low1 mode	0 - 600 (min-1)
Impact rate	High mode	0 - 2,800 (min-1)
	Medium mode	0 - 2,300 (min-1)
	Low2 mode	0 - 1,800 (min-1)
	Low1 mode	0 - 1,200 (min-1)
Weight	3.7kg (with BSL36A18 battery)	
Length	221mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included	



Naked: WR36DB(H4Z)



## WR36DA(HRZ) 36V Brushless High Torque 19mm Impact Wrench

Available Kit and Naked



- 1,800Nm high torque performance
- IP56 dust and water resistant
- 4 step tightening mode selector
- Highly durable hammer case

### Specifications

Capacity	Bolt	M12 - M30
	High tension bolt	M10 - M24
Max. torque	Tightening	1,100Nm
	Nut busting	1,800Nm
Square drive	19mm (3/4")	
	High mode	0 - 1,500 (min-1)
No load speed	Medium mode	0 - 1,200 (min-1)
	Low2 mode	0 - 900 (min-1)
	Low1 mode	0 - 600 (min-1)
Impact rate	High mode	0 - 2,900 (min-1)
	Medium mode	0 - 2,300 (min-1)
	Low2 mode	0 - 1,800 (min-1)
	Low1 mode	0 - 1,200 (min-1)
Weight	3.7kg (with BSL36A18 battery)	
Length	221mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included	



Naked: WR36DA(H4Z)



## G3613DA(HRZ) 36V Brushless 125mm Angle Grinder with Slide Switch

Available Kit and Naked



- Auto mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Variable speed dial
- Compact grip circumference



**COMING SOON**

### Specifications

Wheel diameter	125mm	
Switch type	Slide	
No load speed	Auto mode	5,500 (min-1)
	Standard mode	3,000-9,500 (min-1)
Spindle thread	M14 x 2	
Weight	2.8kg (with BSL36A18 battery)	
	Length	358mm
	Height	139mm
Dimensions	Grip circumference 146mm	
	Battery type BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, grinding disc, wrench and stackable case	



Naked: G3613DA(H4Z)



## G3613DB(HRZ) 36V Brushless 125mm Angle Grinder with Paddle Switch

Available Kit and Naked



- Auto mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Variable speed dial
- Compact grip circumference



### Specifications

Wheel diameter	125mm	
Switch type	Paddle	
No load speed	Auto mode	5,500 (min-1)
	Standard mode	3,000-9,500 (min-1)
Spindle thread	M14 x 2	
Weight	2.8kg (with BSL36A18 battery)	
	Length	358mm
	Height	139mm
Dimensions	Grip circumference 146mm	
	Battery type BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, grinding disc, wrench and stackable case	



Naked: G3613DB(H4Z)



## AC Power. DC Freedom.

A new generation battery system, with almost the same size and weight as our 18V battery, but it's the technology inside that provides you with the great improvements you need.

Doubling voltage provides the optimal power, without the hassle of cords. The **MultiVolt** battery is compatible with almost every cordless HiKOKI power tool, which means you can easily switch from one power tool to another, regardless the voltage. So you're just a simple click away from maximum performance.

### C3610DRA(HAZ) 36V Brushless Slide Compound Mitre Saw

Available Kit and Naked



4966376324385



COMING SOON



Naked: C3610DRA(H4Z)



4966376324378

## CR36DA(HGZ) 36V Brushless Reciprocating Saw

Available Kit and Naked



4966376324835

- 4 step speed selection switch
- Orbital & swing cutting mechanism
- Twin rotation counterweight system
- Bright LED
- Large pivot hook



### Specifications

Capacity	Steel pipe	130mm
	Wood	300mm
	Steel plate	19mm
No load speed	0-1,700 / 0-2,000 / 0-2,500 / 0-3,000Spm	
Stroke length	32mm	
Weight	4.8kg including BSL36A18 battery	
Length	457mm	
Battery type	BSL36A18: Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, Charger, Blade and moulded carry case	



Naked: CR36DA(H4Z)



4966376324828

## C3607DA(HRZ) 36V Brushless 185mm Circular Saw

Available Kit and Naked



4966376313594

- Electric brake
- Silent mode reduces noise and power consumption
- Compact and lightweight
- Kickback mitigation



### Specifications

Capacity	Max. of depth cut: 90°	62mm
	Max. of depth cut: 45°	47.5mm
No load speed	Power mode	4,300 (min-1)
	Silent mode	2,000 (min-1)
Blade diameter	185mm	
Angle cutting	-5° - 45°	
Weight	4.1kg (with BSL36A18 battery)	
Dimensions	Length	318mm
	Width	204mm
	Height	267mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, blade, guide and stackable case	



Naked: C3607DA(H4Z)



9323624028788



The Li-ion battery  
cordless nailer series

# Blending portability with power.



**HIKOKI**  
HIGH PERFORMANCE POWER TOOLS

### 36VSTARTERPACK1Z MultiVolt Battery Combination Pack




9323624028757

- 1 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3



### 36VSTARTERPACK2Z MultiVolt Battery Combination Pack



9323624028764

- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3



## KC36DBDL(HRZ) 2 Piece MultiVolt Brushless Combination Pack



9323624028672

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Stackable Carry Case



## KC36DPL(HRZ) 2 Piece MultiVolt Brushless Combination Pack



9323624028696

- DV36DA Brushless Impact (Hammer) Driver Drill
- WR18DBDL2 Brushless 12.7mm Impact Wrench
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Stackable Carry Case



### KC36DDBL(HRZ) 3 Piece MultiVolt Brushless Combination Pack



9323624028689

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- G3613DB Brushless Angle Grinder with Paddle Switch
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 x Stackable Carry Cases



### KC36DRBL(HRZ) 3 Piece MultiVolt Brushless Combination Pack



9323624028702

- DV36DA Brushless Impact (Hammer) Driver Drill
- WR18DBDL2 Brushless 12.7mm Impact Wrench
- G3613DB Brushless Angle Grinder with Paddle Switch
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 x Stackable Carry Cases



## KC36D4P(HRZ) 4 Piece MultiVolt Brushless Combination Pack



9323624028726

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- G3613DB Brushless Angle Grinder with Paddle Switch
- DH36DPC Brushless SDS Plus Rotary Hammer
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Large Site Bag



**COMING SOON**

## KC36D13P(HRZ) 13 Piece MultiVolt Brushless Combination Pack



9323624028719

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- WR18DBDL2 Brushless 12.7mm Impact Wrench
- G3613DB Brushless Angle Grinder with Paddle Switch
- DH36DPC Brushless SDS Plus Rotary Hammer
- CR36DA(HGZ) 36V Brushless Reciprocating Saw
- C3607DA Brushless 185mm Circular Saw
- CJ18DSL Jig Saw
- UR18DSAL Digital Radio
- RB18DSL Blower
- R18DSAL Vacuum Cleaner
- UB18DJL Worklight & Torch
- UB18DGL Worklight
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 Way AC/DC Charger
- Premium Site Bag



**COMING SOON**

### 18VFRAMERCOMBO1(HRZ) 2 Piece 18V Slide Brushless Combination Pack:



9323624028535

- NR1890DBCL Brushless 90mm Strip Nailer
- NT1865DBAL Brushless 65mm DA Finish Nailer
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 x Stackable Carry Cases



### 18VFRAMERCOMBO2(HRZ) 2 Piece 18V Slide Brushless Combination Pack



9323624028542

- NR1890DBCL Brushless 90mm Strip Nailer
- NT1865DBSL Brushless 65mm C Finish Nailer
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 x Stackable Carry Cases



## DN18DSL(H4Z) 18V 10mm Angle Drill

Available Naked Only



4966376308460

- All metal gear case for extra strength
- Variable speed large paddle switch with brake
- Narrow head height for greater access
- 22 stage adjustable clutch



### Specifications

Capacity	Wood	28mm
	Mild steel	10mm
No load speed	0 - 1,800 (min-1)	
Chuck type	10mm keyless	
Head height	88mm	
Weight	1.7kg (with BSL1830C battery)	

Length	314mm (with BSL1830C battery)
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Side handle and steel belt hook. Batteries and charger available separately

## DV18DJL(HCZ) 18V Impact (Hammer) Driver Drill

Available Kit and Naked



4966376312795

- 2 speed gearbox with all metal gears
- Compact and lightweight
- 13mm keyless chuck
- 22 stage adjustable clutch



### Specifications

Capacity	Masonry	13mm
	Wood	38mm
	Steel	13mm
No load speed	0 - 350 / 0 - 1,400 (min-1)	
No load impact rate	0 - 4,900 / 0 - 19,600 (min-1)	
Max. torque	Hard	23Nm
	Soft	55Nm
Weight	1.7kg (with BSL1815 battery)	
Length	220mm	
Battery type	BSL1815 1.5Ah li-ion battery	
Standard accessories	2 x BSL1815 batteries, UC18YSL3 rapid charger and stackable case	



Naked: DV18DJL(H4Z)



4966376312788

**DV18DBL2(H4Z) 18V Brushless Impact (Hammer) Driver Drill**

Available Naked Only



4966376312214

- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch

**Specifications**

Capacity	Masonry	16mm
	Wood	76mm
	Steel	13mm
No load speed	0 - 500 / 0 - 2,100 (min-1)	
No load impact rate	0 - 31,500 (min-1)	
Max. torque	Hard	136Nm
	Soft	62Nm
Weight	2.5kg (with BSL36A18 battery)	
Length	204mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Side handle, driver bit and steel belt hook. Batteries and charger available separately	

**DS18DBL2(H4Z) 18V Brushless Driver Drill**

Available Naked Only



4966376310197

- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch

**Specifications**

Capacity	Wood	76mm
	Steel	13mm
No load speed	0 - 500 / 0 - 2,100 (min-1)	
Max. torque	Hard	136Nm
	Soft	62Nm
Weight	2.5kg (with BSL36A18 battery)	
Length	204mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Side handle, driver bit and steel belt hook. Batteries and charger available separately	



## DH18DBL(H4Z) 18V Brushless SDS-Plus Rotary Hammer

Available Naked Only



- 2.6 joules high impact energy
- 3 mode: rotation + hammering, hammer only and rotation only
- Neutral lever allows for multiple chisel positions



### Specifications

	Masonry	26mm
Capacity	Wood	27mm
	Steel	13mm
No load speed	0 - 1,050 (min-1)	
Impact rate	0 - 3,950 (min-1)	
Impact energy	2.6J	
Chuck type	SDS Plus	

Weight	3.7kg (with BSL36A18 battery)
Length	351mm
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries
Standard accessories	Side handle and depth gauge. Batteries and charger available separately

## 402933 Dust Extractor to suit DH18DBL

Available Naked Only



## 402934 Dust Extractor to suit DH36DPC

Available Naked Only



- HEPA filter collects 99.97% of all particles greater than 0.3um
- Brush type cap is highly durable and efficient
- Built in motor which works in conjunction with the rotary hammer



### Specifications

Flow rate	0.35 (m3/min)
Operating stroke	100mm
Nozzle seal	Rubber
Sealing cap for drill bit	Brush
Dust box capacity	300ml
Weight	1.8kg

## DH18DSL(H4Z) 18V SDS-plus Rotary Hammer

Available Naked Only



- Power and save mode speed selection
- Idle striking prevention mechanism protects the tool, bit and workpiece.
- Externally accessible brushes facilitating easy service



### Specifications

	Masonry	16mm
Capacity	Wood	18mm
	Steel	13mm
No load speed	0 - 750 / 0 - 1,500 (min-1)	
Impact rate	0 - 3,100 / 0 - 6,200 (min-1)	
Chuck type	SDS Plus	

Weight	2.2kg (with BSL36A18 battery)
Length	276mm
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries
Standard accessories	Side handle and depth gauge. Batteries and charger available separately

## WH18DBDL2(H4Z) 18V Brushless Impact Driver

Available Naked Only



4966376320752

- IP56 dust and water resistant
- Triple hammer anvil reduces vibration and “cam-out”
- 4 step tightening mode selector
- Exceptional ergonomics with well balanced weight distribution

### Specifications

	Bolt	M5 - M18
Capacity	High tension bolt	M5 - M14
	Screw	M4 - M10
Max. torque	210Nm	
	Soft mode	0 - 900 (min-1)
No load speed	Normal mode	0 - 2,900 (min-1)
	Power mode	0 - 2,900 (min-1)
	S mode (Self drilling)	0 - 2,900 (min-1)
	Soft mode	0 - 1,900 (min-1)
Impact rate	Normal mode	0 - 4,000 (min-1)
	Power mode	0 - 4,000 (min-1)
	S mode(Self drilling)	0 - 2,100 (min-1)
Weight	1.6kg (with BSL36A18 battery)	
Length	127mm	



Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Driver bit and steel belt hook. Batteries and charger available separately

## WH18DSDL(H4Z) 18V Impact Driver

Available Naked Only



4966376321469

- Power and save mode speed selection
- Aluminium cover for high rigidity
- Externally accessible brushes

### Specifications

	Bolt	M6 - M14
Capacity	High tension bolt	M6 - M12
	Screw	M4 - M10
Max. torque	176Nm	
No load speed	0 - 2,000 / 2,600 (min-1)	
Impact rate	0 - 2,400 / 3,200 (min-1)	
Drive	6.35mm hex drive	
Weight	1.7kg (with BSL36A18 battery)	
Length	162mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Driver bit and steel belt hook. Batteries and charger available separately	



## Faster and Easier.

HiKOKI high performance power tools are designed to make your job easier and get it done faster so you can spend less time working and more time living.



### WF18DSL(H4Z) 18V Automatic Screw Driver

Available Naked Only



- Quick adjustment button allows fast adjustment to suit screw length
- Silent clutch for low noise and shock free clutching
- Belt guide on slider case for accurate feeding

#### Specifications

Capacity	Small screw	4mm
Screw length	25 - 41mm	
No load speed	4,200 (min-1)	
Drive	6.35mm hex drive	
Weight	2.1kg (with BSL36A18 battery)	
Length	399mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	3 x No.2 phillips driver bits, 3 x surface protectors and steel belt hook. Batteries and charger available separately	

## WR18DBDL2(HRZ) 18V Brushless 12.7mm Impact Wrench

Available Kit and Naked



- IP56 dust and water resistant
- 4 step tightening mode selector
- Smooth socket changes with friction ring anvil
- Exceptional ergonomics with well balanced weight distribution



### Specifications

Capacity	Bolt	M10 - M20
	High tension bolt	M10 - M16
Max. torque	Tightening	305Nm
Square Drive	12.7mm (1/2")	
	High mode	0 - 2,700 (min-1)
No load speed	Medium mode	0 - 2,000 (min-1)
	Low mode	0 - 1,000 (min-1)
	Single mode	0 - 2,700 (min-1)
Full load impact rate	0 - 3,600 (min-1)	
Weight	1.8kg (with BSL36A18 battery)	
Length	145mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included	



Naked: WR18DBDL2(H4Z)



## WR18DSDL(H4Z) 18V 12.7mm Impact Wrench

Available Naked Only



- Power and save mode speed selection
- Aluminium cover for high rigidity
- Externally accessible brushes



### Specifications

Capacity	Bolt	M10 - M18
	High tension bolt	M8 - M14
Max. torque	Tightening	271Nm
Square drive	12.7mm (1/2")	
No load speed	0 - 2,000 / 2,600 (min-1)	
Impact rate	0 - 2,400 / 3,200 (min-1)	
Weight	1.7kg (with BSL36A18 battery)	
Length	173mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Steel belt hook. Socket not included Batteries and charger available separately	

## WR18DSDL(H4Z) 18V 12.7mm High Torque Impact Wrench

Available Naked Only



- High torque performance
- Forward & reverse tumbler switch
- Aluminium cover for high rigidity
- Externally accessible brushes



### Specifications

Capacity	Bolt	M12 - M22
	High tension bolt	M12 - M16
Max. torque	Tightening	486Nm
Square drive	12.7mm (1/2")	
No load speed	0 - 1,500 (min-1)	
Impact rate	0 - 2,000 (min-1)	
Weight	3.4kg (with BSL36A18 battery)	
Length	264mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Steel belt hook. Socket not included Batteries and charger available separately	

## NH18DSL(H4Z) 18V Automatic Hammer

Available Naked Only



4966376264384

- Designed for driving nails in hard to reach places
- Compact head
- LED



### Specifications

Nail details	Length	Min 25mm
		Max 90mm
	Head diameter	Min 3.9mm
		Max 8.8mm
Shank diameter	Min 1.7mm	
		max 4.2mm

Impact rate	4,000min <sup>-1</sup>
Driving speed	1.5 seconds
Drive height	17mm
Head height	113mm
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries
Standard accessories	Batteries and charger available separately

## N18DSL(H4Z) 18V Stapler

Available Naked Only



4966376315871


- Tool-less depth dial for flush, proud or deep driving
- Anti-blank firing mechanism
- Up to 10,000 staples per charge with MultiVolt



### Specifications

Capacity	6mm, 10mm, 13mm	
Load capacity	150 staples	
Stroke length	26mm	
Weight	1.8kg	
Dimensions	Length	235mm
	Height	166mm
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries	
Standard accessories	Optional batteries and charger available separately	

### N18DSL Staples



Part No.	Thickness (mm)	Width (mm)	Box Qty	Barcode
750667	0.7	12.8	4,800	8717574041293
750668	0.7	12.8	4,800	8717574041309
750669	0.7	12.8	4,800	8717574041316

## NT1850DBSL(H4Z) 18V Brushless 50mm C1 Brad Nailer

Available Naked Only



- Lower running cost than gas nailers
- Unique air drive system
- More nails driven per charge; approximately 2,800
- Reload window is incorporated within the magazine

### Specifications

Driving system	Unique Air Drive	
Nail length	16 - 50mm	
Driving speed	3 nails/sec (intermittent)	
Loading capacity	100 nails	
Firing mode	Full sequential / Contact (selectable)	
Fastening series	18 gauge C1 series Brad nails	
Weight	3.6kg (with BSL36A18 battery)	
Dimensions	Length	310mm
	Height	323mm
	Width	104mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Hook, nose cap, safety glasses and stackable case. Batteries and charger available separately	



## NT1865DBSL(HRZ) 18V Brushless 65mm C Finish Nailer

Available Kit and Naked



- Lower running cost than gas nailers
- Unique air drive system
- More nails driven per charge; approximately 2,650
- Dry fire lockout

### Specifications

Driving system	Unique Air Drive	
Nail length	25 - 65mm	
Driving speed	3 nails/sec (intermittent)	
Loading capacity	100 nails	
Firing mode	Full sequential / Contact (selectable)	
Fastening series	16 gauge C series finish nails	
Weight	3.6kg (with BSL36A18 battery)	
Dimensions	Length	310mm
	Height	323mm
	Width	104mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, nose cap, safety glasses and stackable case	



Naked: NT1865DBSL(H4Z)



## NT1865DBAL(HRZ) 18V Brushless 65mm DA Finish Nailer

Available Kit and Naked



9323624029037

- Lower running cost than gas nailers
- Unique air drive system
- More nails driven per charge; approximately 2,250
- Dry fire lockout



### Specifications

Driving system	Unique Air Drive	
Nail length	32 - 65mm	
Driving speed	3 nails/sec (intermittent)	
Loading capacity	100 nails	
Firing mode	Full sequential / Contact (selectable)	
Fastening Series	15 gauge DA series finish nails	
Weight	3.8kg (with BSL36A18 battery)	
Dimensions	Length	310mm
	Height	344mm
	Width	104mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, nose cap, safety glasses and stackable case	



Naked: NT1865DBAL(H4Z)



4966376316199

## NR1890DBCL(HRZ) 18V Brushless 90mm Strip (Framing) Nailer

Available Kit and Naked



9323624029051

- Lower running cost than gas nailers
- Unique air drive system
- Dual function trigger for sequential and contact mode with operation control panel
- Dry fire lockout



### Specifications

Driving system	Unique Air Drive	
Nail length	50 - 90mm	
Driving speed	3 nails/sec (intermittent)	
Loading capacity	47 nails	
Firing mode	Full sequential / Contact (selectable)	
Fastening Series	Clipped head strip nails	
Weight	4.8kg (with BSL36A18 battery)	
Dimensions	Length	309mm
	Height	342mm
	Width	127mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, 2 x hex wrenches, safety glasses and stackable case	



Naked: NR1890DBCL(H4Z)



4966376315963

## CN18DSL(H4Z) 18V 1.6mm Nibbler

Available Naked Only



- 180 degree 3 stop die holder
- Safety anti-start override circuit
- Punch and die have 300m steel service life\*



### Specifications

Cutting capacity	Mild steel plate (400N/mm <sup>2</sup> )	1.6mm
	Stainless steel plate (400N/mm <sup>2</sup> )	1.2mm
Minimum cutting radius	40mm	
Cutting speed	1.8 (m/min)*	
Number of strokes at no load	2,500 (min-1)	

Weight	2.1kg (with BSL36A18 battery)
Length	295mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Optional batteries and charger available separately

\*When cutting 1.6mm thick mild steel

## CE18DSL(H4Z) 18V 1.6mm Shear

Available Naked Only



- Unique design allows for fast cutting and tight cutting radius
- Metal safety guard
- Safety anti-start override circuit
- Easily replaceable cutter blades with 8 cutting edges



### Specifications

Cutting capacity	Mild steel plate (400N/mm <sup>2</sup> )	1.6mm
	Stainless steel plate (400N/mm <sup>2</sup> )	1.2mm
Minimum cutting radius	25mm	
Cutting speed	5.0 (m/min)*	
Number of strokes at no load	5,300 (min-1)	

Weight	2.2kg (with BSL36A18 battery)
Length	295mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Optional batteries and charger available separately

\*When cutting 1.6mm thick mild steel



## G18DBBAL(H5Z) 18V Brushless 125mm Angle Grinder with Paddle Switch

Available Naked Only



- Auto Mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Compact grip circumference

### Specifications

Wheel diameter	125mm	
Switch type	Paddle	
No load speed	Auto mode	5,500 (min-1)
	Standard mode	9,000 (min-1)
Spindle thread	M14 x 2	
Weight	2.7kg (with BSL36A18 battery)	



Dimensions	Length	326mm
	Height	138mm
	Grip circumference	152mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V batteries	
Standard accessories	Side handle, grinding disc and wrench. Batteries and charger available separately	

## G18DBL(H5Z) 18V Brushless 125mm Angle Grinder with Slide Switch

Available Naked Only



- Auto Mode function
- Soft start, kickback reduction, restart protection
- Compact grip circumference

### Specifications

Wheel diameter	125mm	
Switch type	Slide	
No load speed	Auto mode	5,500 (min-1)
	Standard mode	9,000 (min-1)
Spindle thread	M14 x 2	
Weight	2.4kg (with BSL36A18 battery)	



Dimensions	Length	326mm
	Height	138mm
	Grip circumference	152mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Side handle, grinding disc and wrench. Batteries and charger available separately	

## G18DSL(H5Z) 18V 125mm Angle Grinder with Slide Switch

Available Naked Only



- Aluminium cover for high rigidity
- Safety anti-start override circuit
- Externally accessible brushes

### Specifications

Wheel diameter	125mm	
Switch type	Slide	
No load speed	9,100 (min-1)	
Spindle thread	M14 x 2	
Weight	1.8kg (with BSL36A18 battery)	
Length	293mm	



Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Side handle, grinding disc and wrench. Batteries and charger available separately	

**CR18DBL(H4Z) 18V Brushless Reciprocating Saw**

Available Naked Only



4966376304899

- Auto Mode function
- Electronic control panel to select between low, medium, high and auto modes
- Slimmer front and shock absorbing handle for user comfort
- Blade can be mounted in either upward or downward direction

**Specifications**

Capacity	Steel pipe	130mm
	Wood	120mm
	Steel plate	19mm
No load speed	0 - 1,600 / 2,300 / 2,500 (min-1)	
Stroke length	32mm	
Weight	3.4kg (with BSL36A18 battery)	
Length	435mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessory	Cutting blade. Batteries and charger available separately	

**CR18DSL(H4Z) 18V Reciprocating Saw**

Available Naked Only



4966376305148

- Safety lock off button to prevent accidental start up
- Large trigger switch
- Blade can be mounted in either upward or downward direction

**Specifications**

Capacity	Steel pipe	90mm
	Wood	90mm
	Steel plate	10mm
No load speed	0 - 2,100 (min-1)	
Stroke length	28mm	
Weight	3.4kg (with BSL36A18 battery)	
Length	434mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Blade and wrench. Batteries and charger available separately	

## C18DBL(H4Z) 18V 125mm Brushless Circular Saw

Available Naked Only



4966376301782

- Electric brake
- Rotation speed change over function: Power mode / Silent mode
- Centre balance technology offers superior manoeuvrability
- Compact and lightweight



### Specifications

Capacity	Max. of depth cut: 90°	47mm
	Max. of depth cut: 45°	30mm
No load speed	Power mode	5,000 (min-1)
	Silent mode	3,000 (min-1)
Blade diameter	125mm	
Angle cutting	0° - 45°	
Weight	2.5kg (with BSL36A18 battery)	
Dimensions	Length	280mm
	Width	168mm
	Height	237mm
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries	
Standard accessories	Blade and wrench. Batteries and charger available separately	

## C18DBAL(H4Z) 18V 165mm Brushless Circular Saw

Available Naked Only



4966376301683

- Electric brake
- Rotation speed change over function: Power mode / Silent mode
- Centre balance technology offers superior manoeuvrability
- Compact and lightweight



### Specifications

Capacity	Max. of depth cut: 90°	66mm
	Max. of depth cut: 45°	45mm
No load speed	Power mode	4,100 (min-1)
	Silent mode	2,500 (min-1)
Blade diameter	165mm	
Angle cutting	-5° - 45°	
Weight	3.2kg (with BSL36A18 battery)	
Dimensions	Length	294mm
	Width	188mm
	Height	255mm
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries	
Standard accessories	Blade and wrench. Batteries and charger available separately	

## C18DSL(H4Z) 18V 165mm Circular Saw

Available Naked Only



- Electric brake
- Magnesium saw cover for high rigidity
- Safety switch lever and light switch are integrated
- 90° fine adjustment screw
- Ergonomic soft grip handle



### Specifications

Capacity	Max. of depth cut: 90°	57mm
	Max. of depth cut: 45°	40mm
No load speed	3,400 (min-1)	
Blade diameter	165mm	
Angle cutting	0° - 45°	
Weight	3.2kg (with BSL36A18 battery)	

Length	365mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Blade, wrench and parallel guide. Batteries and charger available separately

## CJ18DSL(H4Z) 18V Jig Saw

Available Naked Only



- 4-stage orbital action
- Alloy base
- Powerful dust blowing mechanism



### Specifications

Capacity	Wood	135mm
	Steel	10mm
No load speed	0 - 2,400 (min-1)	
Stroke length	26mm	
Blade type	Standard bayonet	
Angle cutting	0° - 45° left and right	
Weight	2.4kg (with BSL36A18 battery)	
Length	277mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Blade, splinter guard and chip cover. Batteries and charger available separately	

## Innovation in action.

**Auto Mode** is the intelligent electronic process that works in conjunction with HiKOKI cordless brushless motors. Auto Mode conserves energy and regulates power based on need, automatically adjusting power as the load increases or decreases. Auto Mode works to optimise operation by reducing vibrations and operating noise and helping increase battery run time.

### CB18DBL(H4Z) 18V 83mm Brushless

Band Saw Available Naked Only



4966376302345

- Auto Mode function
- Soft start function
- High speed cutting with a cleaner finish



#### Specifications

Capacity	Round pipe (external diameter)	83mm
	Square pipe (WxH)	80 x 80mm
Cutting speed	Standard mode	80 - 195 (m/min)
	Auto mode (without load)	120 - 195 (m/min)
Blade size	900 x 12.5 x 0.5mm	
Weight	3.6kg (with BSL36A18 battery)	
	Length	413mm
Dimensions	Width	173mm
	Height	266mm
	Battery type (sold separately)	
Standard accessories	1 x 18TPI bi-metal blade, side handle and wrench. Batteries and charger available separately	

#### Blade Selection Guide

Thickness	18TPI	14TPI
Under 3mm	✓	X
3mm to 6mm	✓	✓
Over 6mm	X	✓



**Also available**  
**338430 14TPI Blades**  
**338431 18TPI Blades**

## P18DSL(H4Z) 18V 82mm Planer

Available Naked Only



- Heavy-duty aluminium end bracket
- Rear stand for added user safety and blade protection
- Ergonomic slim grip angled handle
- Optional dust adaptor



### Specifications

Cutting width	82mm	
Max. cutting depth	2.0mm	
Max. rebating depth	9.0mm	
No load speed	16,000 (min-1)	
Weight	3.3kg (with BSL36A18 battery)	
Dimensions	Length	332mm
	Width	166mm
	Height	160mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	4 x 82mm reversible TCT blades. Batteries and charger available separately	

## CV18DBL(H4Z) 18V Brushless Multi Tool

Available Naked Only



- Auto Mode function
- Oscillating Interface System (OIS)
- Constant speed control



### Specifications

Operating speed / Vibration frequency	Standard mode	6,000 - 20,000 (min-1)
	Auto mode (no load)	6,000 - 15,000 (min-1)
	Auto mode (with load)	6,000 - 20,000 (min-1)
Weight	2.0kg (with BSL36A18 battery)	
Length	307mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	1 x Bi-metal plunge cut saw blade, 1 x Bi-metal segment saw blade, sanding plate, 9 x assorted sandpaper and accessories storage box. Batteries and charger available separately	

## AW18DBL(HRZ) 18V High Pressure Washer

Available Kit and Naked



9323624028559

- Ideal for use where mains water or electricity is not accessible
- Approx. 7 x more powerful<sup>\*1</sup> and uses 94% less water per minute<sup>\*2</sup> than a garden hose.
- Lightweight and compact

### Specifications

Discharge pressure	0.5 - 2.0 (Mpa)
Water discharge	0.5 - 1.2 (L/min)
Water supply method	Tank water supply / Faucet connection / Storage water supply
Permissible water temp.	40°C or less
Tank capacity	8L
Weight	4.5kg (with BSL36A18 battery)
Dimensions	Length 302mm
	Width 254mm
	Height 473mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, trigger gun, 3m high pressure hose, variable nozzle and nozzle cleaner pin

\*1: When the mains water pressure is approx. 0.3Mpa. The value may vary according to conditions.

\*2: The values are for reference purposes. They may vary according to conditions.




Naked: AW18DBL(H4Z)



4966376301522

## CH18DSL(H4Z) 18V Hedge Trimmer

Available Naked Only



4966376303298

- Dual action double-sided and double-edged blades
- Large front handle with safety switch
- Long cutting blade



### Specifications

No load speed	1,100 (min-1)
Cutting bar length	520mm
Cutting capacity	15mm
Weight	2.4kg (with BSL36A18 battery)
Length	846mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Cutting blade bar cover. Batteries and charger available separately

## RB18DSL(DS4Z) 18V Blower & Vacuum Pack

Available Naked Only



9323624028665

- Blower and vacuum functions
- Variable speed control trigger
- Includes dustbag and various nozzles

### Specifications

Full load speed	0 - 15,000 (min-1)
Air volume	0 - 2.2 (m <sup>3</sup> /min)
Air pressure	0 - 3.9 (kPa)
Runtime	35min (with BSL36A18 battery)
Weight	1.6kg (with BSL36A18 battery)
Length	505mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries



Standard accessories

Short nozzle, long nozzle, dust bag, flexible hose and adaptor, crevice nozzle and concentrator nozzle. Batteries and charger available separately

## R18DSL(H4Z) 18V Wet & Dry Vacuum

Available Naked Only



4966376317288

- High suction power in both wet and dry applications
- Large capacity dust and liquid case
- Semi-transparent dust case

### Specifications

Capacity	Dust: 670ml / Liquid: 120ml
Runtime	50min (with BSL36A18 battery)
Weight	1.5kg (with BSL36A18 battery)
Length	430mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Brush, crevice and squeegee nozzle. Batteries and charger available separately



## R18DSAL(H4Z) 18V Vacuum Cleaner

Available Naked Only



4966376317226

- Highly efficient dust removal system
- Angled cut connection/collection port ensures harder suction
- Rotating ball joint within the flooring tool

### Specifications

Runtime	40min (with BSL36A18 battery)	
Suction work rate	40W	
Dust collecting capacity	560ml	
Weight	15kg (with BSL36A18 battery)	
Dimensions (without accessories)	Length	458mm
	Width	114mm
	Height	153mm



Battery type (sold separately)

Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries

Standard accessories

Flooring nozzle, crevice nozzle and extension pipe (with crevice nozzle holder). Batteries and charger available separately



## UB18DGL(L0Z) 18V Worklight

Available Naked Only



4966376317707

- Massive illumination with 36 bright white LEDs
- 240° adjustable head which pivots in 16 steps
- Multiple mounting capabilities

### Specifications

Light source	36 ultra bright white LEDs	
Illumination	Power mode	250 lx
	Save mode	140 lx
Runtime	Power mode	6.5 hrs (with BSL36A18 battery)
	Save mode	15 hrs (with BSL36A18 battery)
Weight	0.74kg (without battery)	



Dimensions	Length	198mm
	Width	256mm
	Height	252mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Batteries and charger available separately	

## UB18DJL(L0Z) 18V Worklight & Torch

Available Naked Only



4966376317745

- Torchlight and worklight functions
  - 12 ultra bright white LEDs
  - Adjustable head which pivots left-right
- 270 degrees in seven steps and up-down 180 degrees in five steps

### Specifications

Light source	12 x 0.5W, 1x 3W ultra bright white LEDs	
Illumination	Torch light	6,000 lx
	High (12 LED)	110 lx
	Mid (6 LED)	55 lx
	Low (3 LED)	27 lx
Runtime	Torch light	43 hrs (with BSL36A18 battery)
	High (12 LED)	16 hrs (with BSL36A18 battery)
	Mid (6 LED)	30 hrs (with BSL36A18 battery)
	Low (3 LED)	51 hrs (with BSL36A18 battery)



Weight	0.3kg (without battery)	
Dimensions	Length	205mm
	Width	78mm
	Height	108mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Shoulder strap and hook. Batteries and charger available separately	

## BSL18UA(W6Z) 18V Twin Port USB Adaptor

Available Naked Only



4966376301669

- Compatible with MultiVolt, 14.4V and 18V HiKOKI and Hitachi slide batteries
- Twin USB ports for charging and operating USB devices
- 12V port for added versatility

### Specifications

Charge rate	2 Amps	
Number of charges per 5.0Ah battery pack*	Smart phone	10
	Tablet	2
USB port	2	
Belt hook	Equipped	
Weight	156g (without battery)	



Dimensions (without battery)	Length	117mm
	Width	80mm
	Height	98mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Batteries and charger available separately	

\*These values are internal tests. The values are for reference purposes only. They may vary according to the state of batteries, particular device and operating conditions.

## UR18DSAL(H4Z) 18V Digital Radio

Available Naked Only



4966376319572

- Digital signal (DAB & DAB+) receiving system
- IPX4 water protection grade
- USB terminal allows charging of smart phones and music players
- High frequency amplifier for reduced static



### Specifications

AM frequency	522 - 1629 (KHz)	
FM frequency	87.5 - 108 (MHz)	
Speaker	90mm (8Ω) 7W x 2	
Weight	3.4kg (without battery)	
Dimensions (without accessories)	Length	366mm
	Width	303mm
	Height	261mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	AC adaptor, 2 x AA batteries and cable holder. Batteries and charger available separately	

## UR18DSDL(H4Z) 18V Digital Radio With Bluetooth

Available Naked Only



4966376319619

- Digital signal (DAB & DAB+) receiving system
- IPX4 water protection grade
- USB terminal allows charging of smart phones and music players
- Bluetooth connection capability
- High frequency amplifier for reduced static



### Specifications

AM frequency	522 - 1629 (KHz)	
FM frequency	87.5 - 108 (MHz)	
Speaker	90mm (8Ω) 7W x 2	
Weight	4.0kg (without battery)	
Dimensions (without accessories)	Length	405mm
	Width	312mm
	Height	265mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	AC adaptor, 2 x AA batteries and cable holder. Batteries and charger available separately	

## UR18DSML(H4Z) 18V Digital TV & Radio With Bluetooth

Available Naked Only



4966376319688

- High definition 8" LCD digital TV
- Digital signal (DAB & DAB+) receiving system
- IPX4 water protection grade
- Supports USB, SD card & Bluetooth
- USB terminal allows charging of smart phones and music player




### Specifications

Power source	AC	Ac adapter
	Li-ion battery	14.4,-18V, Multivolt
TV	Tuner	DVB-T/T2
	Display	8 inch
	Display resolution	1,024x600pixel
Radio	Speaker	90mm x 2
	Maximum output	7W x 2
	Equalizer	Equipped (10 stage system)
Approx runtime	5 hours (with 18V 3.0Ah battery)	

Dimensions	Width	305mm
	Length	405mm
	Height	265mm
Weight	4.2kg	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide battery , AC adaptor, 2 x AA batteries and cable holder. Batteries and charger available separately	
Standard accessories	Remote control, External antenna, AC adaptor, 2 x AA batteries and cable holder. Batteries and charger available separately	

## DB3DL2(HLZ) 3.6V Pencil Driver Drill

Available as Kit Only



4966376306145

- 2 position operation (straight and angled)
- Manual tightening mechanism
- 2 speed gearbox with all metal gears
- Ultra bright white LED



### Specifications

Max. torque	5Nm	
No load speed	200 / 600 (min-1)	
Drive	6.35mm hex drive	
Weight	0.45kg (with EBM315 battery)	
Length	Straight	268mm
	Angled	210mm
Battery type	EBM315 3.6V 1.5Ah li-ion cassette battery	
Standard accessories	2 x EBM315 batteries, charger, driver bit and carry case	

## Lithium Ion Batteries

**EBM315** 3.6V 1.5Ah



**BSL1830C** 18V 3.0Ah Compact



**BSL1860** 18V 6.0Ah



**BSL36A18** 18V 5.0Ah / 36V 2.5Ah MultiVolt



**BSL36B18** 18V 8.0Ah / 36V 4.0Ah MultiVolt



**BSL3660** 36V 6.0Ah



## Lithium Ion Battery Chargers

**UC3SFL(H0Z)** 3.6V Charger



**UC18YML2(H0Z)** 14.4 - 18V Two Way (AC/DC) Charger with Cooling System



**UC18YSL3(H0Z)** 14.4 - 18V Rapid Charger with Cooling System & USB Port



**ET36A(H0Z)** 36V Battery Adaptor



**UC36YSL(H0Z)** 14.4 - 36V Charger with Cooling System



## Site Bags

**402094** Large Site Bag



**402096** Premium Site Bag with Extendable Handle & Wheels





The MultiVolt series

**AC power.  
DC freedom.**



**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS

## Stackable Cases

### 402538 Case I Accessory Organiser

295 x 395 x 105mm



### 402541 Case IV

295 x 395 x 315mm



### 402539 Case II

295 x 395 x 158mm



### 402542 3 x Accessory Case Dividers

(To Suit Case I) 213 x 106 x 63mm



### 402540 Case III

295 x 395 x 210mm



### 402543 Caster Wheels

372 x 526 x 140mm



# Power tools and service you can rely on.

**HiKOKI**  
SERVICE

+

**6** YEAR  
POWER TOOLS  
WARRANTY\*

+

**3** YEAR  
LI-ION BATTERY  
WARRANTY

## Stackable Case Inserts

Insert Number	Barcode	Insert To Suit (Tool)	Tool Description	Insert To Suit Stackable case
373223	4549115181052	WR36DA / WR36DB	MultiVolt Impact Wrenches	Stackable Case III
373070	4549115174467	G3613DA / G3613DB	MultiVolt Angle Grinders	Stackable Case II
373646	4549115187139	C3607DA	MultiVolt Circular Saw	Stackable Case IV
373135	4549115175563	DH36DPC	MultiVolt Rotary Hammer	Stackable Case IV
339368	4549115112636	Twin Tools Insert	Impact Driver Drills/ Driver Drills/ Impact Drivers/ Impact Wrenches	Stackable Case III
336475	4549115055056	Single Tool Insert	Impact Driver Drills/ Driver Drills/ Impact Drivers/ Impact Wrenches	Stackable Case II
339219	4549115106437	C18DBAL	Circular Saw	Stackable Case IV
337529	4549115079540	C18DSL	Circular Saw	Stackable Case IV
337937	4549115090927	CV18DBL	Multi Tool	Stackable Case II & III
337114	4549115072954	DH18DSL	Rotary Hammer	Stackable Case II
337288	4549115075214	DN18DSL	Angle Drill	Stackable Case III
338872	4549115099494	G18DBAL	Angle Grinder	Stackable Case II
337113	4549115072947	G18DSL	Angle Grinder	Stackable Case II
337742	4549115083967	P18DSL	Planer	Stackable Case III
337112	4549115072930	WF18DSL	Screw Driver	Stackable Case III
337109	4549115072909	WR18DShL	Impact Wrench	Stackable Case III
370331	4549115128545	DH18DBL / DH18DBQL	Rotary Hammers	Stackable Case IV
373001	4549115173231	NR1890DBCL	Framing Nailer	Stackable Case IV
371895	4549115157569	NT18656DBAL / NT1865DBSL / NT1850DBSL	Nailers	Stackable Case IV



Ergonomics  
is in our DNA.

**Well-designed,  
easy to operate,  
comfortable,  
reliable, safe.**



# 02

# Pneumatic



### N3804AB3(H2Z) 38mm Narrow Crown Stapler



4966376296965

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed staples
- 360° adjustable exhaust directs air away from user

#### Specifications

Fastener series	18 gauge 6000 series staples
Pressure range	70 – 120 psi
Max. capacity	125 staples
Dimensions	263 x 235mm
Weight	1.0kg
Standard accessories	Nose protector, safety glasses and carry case



### NT50AE2(H2Z) 50mm C1 Series Brad Nailer



4966376297153

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Replacement O-Ring kit (886375)

#### Specifications

Fastener series	18 gauge C1 series brad nails
Pressure range	70 – 120 psi
Max. capacity	100 nails
Dimensions	254 x 233mm
Weight	1.0kg
Standard accessories	Nose protector, safety glasses and carry case



### NT65M2(H2Z) 65mm C Series Finish Nailer



4966376297252

- Both single & bump fire
- Tool-less depth dial
- Replacement O-Ring kit (885914)
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Unique integrated air duster acts as a dust gun

#### Specifications

Fastener series	16 gauge C series finish nails
Pressure range	70 – 120 psi
Max. capacity	100 nails
Dimensions	295 x 285mm
Weight	1.7kg
Standard accessories	Nose protector, safety glasses and carry case



## NT65MA4(H2Z) 65mm DA Series Finish Nailer



4966376297283

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Unique integrated air duster acts as a dust gun
- Replacement O-Ring kit (886376)



### Specifications

Fastener series	15 gauge DA series finish nails
Pressure range	70 – 120 psi
Max. capacity	100 nails
Dimensions	344 x 304mm
Weight	1.9kg
Standard accessories	Nose protector, safety glasses and carry case

## NR90AD(H4Z) 90mm Framing Nailer



9323624028627

- Both single & bump fire
- Tool-less depth dial
- Heavy-duty design
- Magazine with bypass for faster reload speed
- Replacement O-Ring kit (884991)



### Specifications

Fastener series	Paper collated clipped head strip nails	
Pressure range	70 – 120 psi	
Max. capacity	50 x 2.8mm	95 nails
	75 x 3.06mm	90 nails
Dimensions	90 x 3.3mm	85 nails
	462 x 322mm	
Weight	3.2kg	
Standard accessories	Safety glasses and hanger bracket	

## NV65AF3(H1Z) 65mm Wire & Plastic Collated Coil Nailer



Pneumatic

- Both single & bump fire
- Tool-less depth dial
- 360° adjustable exhaust directs air away from user



### Specifications

Fastener series	16° wire collated or 15° plastic collated coil nails
Pressure range	70 – 120 psi
Max. capacity	200 - 400 nails
Dimensions	282 x 297mm
Weight	1.9kg
Standard accessories	Nose protector, safety glasses and carry case

## Application Guide for Pneumatics

Application	N3804AB3	NT50AE2	NT65M2	NT65MA4	NR90AD	NV65AF3
Furniture and Upholstry	•					
Hand and Hobby Crafts	•	•				
Panelling and Picture Framing	•	•	•			
Shop Fitting and Cabinet Making	•	•	•	•		
Finish Nailing Timber & Plastic Trim		•	•			
All Fine Fit Out Work		•	•			
Skirting Boards		•	•	•		
Door Jambes			•	•		
Architraves		•	•	•		
Construction of Eaves			•	•		
Window Manufacture				•		
House Framing and Roof Trusses					•	
Decking and Fencing					•	•
Flooring					•	
Cladding					•	•
Pallet and Crate Manufacture					•	•
Ply Bracing and Strapping						•
Triple Grips and Joist Hangers						•
Tile Underlay						•

## WR14A(H1Z) 12.7mm (1/2") Impact Wrench



- Lightweight and compact at only 1.8kg and 184mm length
- High performance motor allows high torque
- Ergonomic soft grip handle



### Specifications

Capacity	Ordinary bolt	M15
	High tension bolt	M14
Square drive	12.7mm (1/2")	
Max tightening torque	785Nm	
Operating pressure	90psi	
Air consumption (at 0.62MPa)	4.6 (cu ft/min)	
No load speed	7,200rpm	
Sound power level (No load)	85.3dB(A)	
Sound power level (Load)	88.2dB(A)	
Dimensions (LxWxH)	184 x 68 x 205mm	
Weight	1.8kg	
Standard accessories	Oil and clip	

## WR27A(H1Z) 19mm (3/4") Impact Wrench



- High performance motor allows high torque
- Strong aluminum front housing
- Ergonomic soft grip rubber handle



### Specifications

Capacity	Ordinary bolt	M38
	High tension bolt	M27
Square drive	19mm (3/4")	
Max tightening torque	1,760Nm	
Operating pressure	90psi	
Air consumption (at 0.62MPa)	6.9 (cu ft/min)	
No load speed	6,800rpm	
Sound power level (No load)	98.9dB(A)	
Sound power level (Load)	102.5dB(A)	
Dimensions (LxWxH)	216 x 84 x 233mm	
Weight	1.8kg	
Standard accessories	Oil and clip	

## WW8A(H1Z) 6.35mm (1/4") Ratchet Wrench



4966376325733

- High torque at 34Nm
- Ergonomic soft grip rubber handle



### Specifications

Capacity	Ordinary Bolt	M10
	High Tension Bolt	M8
Max Tightening Torque	34Nm	
Operating Pressure	90psi	
Air Consumption (at 0.62MPa)	2.55cfm(cu ft/min)	
Square Drive	6.35mm	

No Load Speed	270rpm
Sound Power Level	89.1dB(A)
Dimensions (LxWxH)	170 x 35 x 45mm
Weight	0.5kg
Standard Accessories	Oil

## WW10A(H1Z) 12.7mm (1/2") Ratchet Wrench



4966376325726

- Ergonomic soft grip rubber handle
- High 95Nm of torque



### Specifications

Capacity	Ordinary Bolt	M13
	High Tension Bolt	M10
Max Tightening Torque	95Nm	
Operating Pressure	90psi	
Air Consumption (at 0.62MPa)	2.52cfm(cu ft/min)	
Square Drive	12.7mm	

No Load Speed	160rpm
Sound Power Level	91.6dB(A)
Length	293mm
Weight	1.3kg
Standard Accessories	Oil

## SV15A(H1Z) 150mm Orbital Sander



4966376325696

- Rubber grip for reduced vibration
- Compact and lightweight at only 184mm height and 1.8kg



### Specifications

Pad Diameter	150mm
Orbit Diameter	5mm
Operating Pressure	90psi
Air Consumption (at 0.62MPa)	2.4 (cu ft/min)
No Load Speed	12,000rpm

Sound Power Level (Load)	86.7dB(A)
Dimensions (LxWxH)	195 x 148 x 106mm
Weight	0.9kg
Standard Accessories	Oil and Wrench

# 03 Drilling



## Quick Reference Guide For Drills

Model	Handle Type	Steel Drilling Dia. (mm)	No Load Speed (min-1)	Power Input (W)	Speed Control			High Torque
					Variable Speed	2-Speed	Reversible	
D13VL(H6Z)	Pistol grip	13	0 - 1,100 / 0 - 3,000	860	•	•	•	
D13VG(H1Z)	Pistol grip	13	0 - 600	710	•		•	•
D13(H1Z)	D-shaped	13	550	720			•	•

### D13VL(H6Z) 13mm Drill with Safety Slip Clutch



4966376271221

- All metal keyless chuck
- AHB (Aluminium Housing Body)
- Safety slip clutch
- Variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life



#### Specifications

Chuck	13mm keyless	
Capacity	Steel	13mm
	Wood	40mm
Input power	860W	
No load speed	High	0 - 3,000 (min-1)
	Low	0 - 1,100 (min-1)

Weight	2.9kg
Length	363mm
Standard accessories	Side handle and depth gauge

### D13VG(H1Z) 13mm High Torque Drill



4966376270972

- Heavy-duty keyed chuck
- Aluminium gear cover and inner cover
- Variable speed
- Forward and reverse
- Suitable for auger, hole saw and mixing applications



#### Specifications

Chuck	13mm keyed	
	Steel - twist bit	13mm
Capacity	Steel - hole saw	70mm
	Wood - spade bit	40mm
	Wood - auger	38mm
	Wood - hole saw	114mm
Input power	710W	

Max. torque	78Nm
No load speed	0 - 600 (min-1)
Weight	2.1kg
Length	287mm
Standard accessories	Chuck key, side handle, handle extension and carry case



## D13(H1Z) 13mm High Torque Drill



- Triple reduction gearing for high torque applications
- Heavy-duty keyed chuck
- Aluminium front cover
- Forward and reverse
- Ideal for auger and mixing applications



Drilling

### Specifications

Chuck	13mm keyed	
Capacity	Steel	13mm
	Wood	40mm
Input power	720W	
No load speed	550 (min-1)	

Weight	3.0kg
Length	378mm
Standard accessories	Chuck key, "D" shaped rear handle and side handle

## B16RM(HWZ) 380mm Pedestal Drill Press



- Variable speed (12 speed sections)
- Keyed on/off switch
- Cast iron table surface
- Laser guide for accurate drilling
- Depth adjustment gauge

### Specifications

Chuck	16mm keyed	
Capacity	Swing	380mm (throat depth - 190mm)
	Spindle travel	85mm
Input power	750W induction motor	
Rotation speed (12 speeds)	210 - 2,580 (min-1)	
Table size	336 x 336mm	
Table tilt	45° left or right	
Weight	75kg	
Length	1,618mm	
Standard accessories	Chuck key, wedge (drift) and hex keys	



## Quick Reference Guide For Impact (Hammer) Drills

Model	Handle Type	Concrete Drilling Dia. (mm)	No Load Speed (min-1)	Power Input (W)	Speed Control			Application	
					Variable Speed	2-Speed	Reversible	Medium Duty	Heavy-duty
DV16VSS(HAZ)	Pistol grip	16	0 - 2,900	600	•		•		
DV20VD(H1Z)	Pistol grip	20	0 - 1,100 / 0 - 3,000	860	•	•	•		•
DV22V(H6Z)	Pistol grip	22	0 - 1,100 / 0 - 3,000	1,120	•	•	•		•



### DV16VSS(HAZ) 13mm Impact Drill



- Lightweight and compact
- Variable speed trigger
- Forward and reverse
- Durable cylindrical housing

#### Specifications

Chuck	13mm keyless	
Capacity	Concrete	16mm
	Steel	13mm
	Wood	25mm
Input power	600W	
No load speed	0 - 2,900 (min-1)	
Impact rate	0 - 34,500 (min-1)	
Weight	1.5kg	
Length	269mm	
Standard accessories	Side handle, depth gauge and carry case	

## DV20VD(H1Z) 20mm Impact Drill



- Heavy-duty keyed chuck
- AHB (Aluminium Housing Body)
- Full speed reverse
- Variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life



Drilling

### Specifications

Chuck	13mm keyed	
Capacity	Concrete	20mm
	Steel	13mm
	Wood	40mm
Input power	860W	
No load speed	Low	0 - 1,100 (min-1)
	High	0 - 3,000 (min-1)

Impact rate	Low	0 - 8,100 (min-1)
	High	0 - 22,000 (min-1)
Weight	3.0kg	
Length	365mm	
Standard accessories	Chuck key, side handle, depth gauge and stackable case	

## DV22V(H6Z) 22mm Impact Drill with Safety Slip Clutch



- All metal keyless chuck
- AHB (Aluminium Housing Body)
- Safety slip clutch
- Full speed reverse
- Lock off (deadman) variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life



### Specifications

Chuck	13mm keyless	
Capacity	Concrete	22mm
	Steel	13mm
	Wood	40mm
Input power	1,120W	
No load speed	Low	0 - 1,100 (min-1)
	High	0 - 3,000 (min-1)

Impact rate	Low	0 - 8,100 (min-1)
	High	0 - 22,000 (min-1)
Weight	3.0kg	
Length	363mm	
Standard accessories	Chuck key, side handle, depth gauge and stackable case	

# It's faster and easier with HiKOKI.

Only HiKOKI lets you get your trade work done faster and easier, so you have more time for the good things in life. All HiKOKI power tools are backed by a 6 Year Warranty and over 70 years of experience and innovation as Hitachi.


Visit [hikokipowertools.com.au](http://hikokipowertools.com.au)



\*6 year warranty on selected products with online registration.  
For details visit [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)

# 04

## Rotary and Demolition

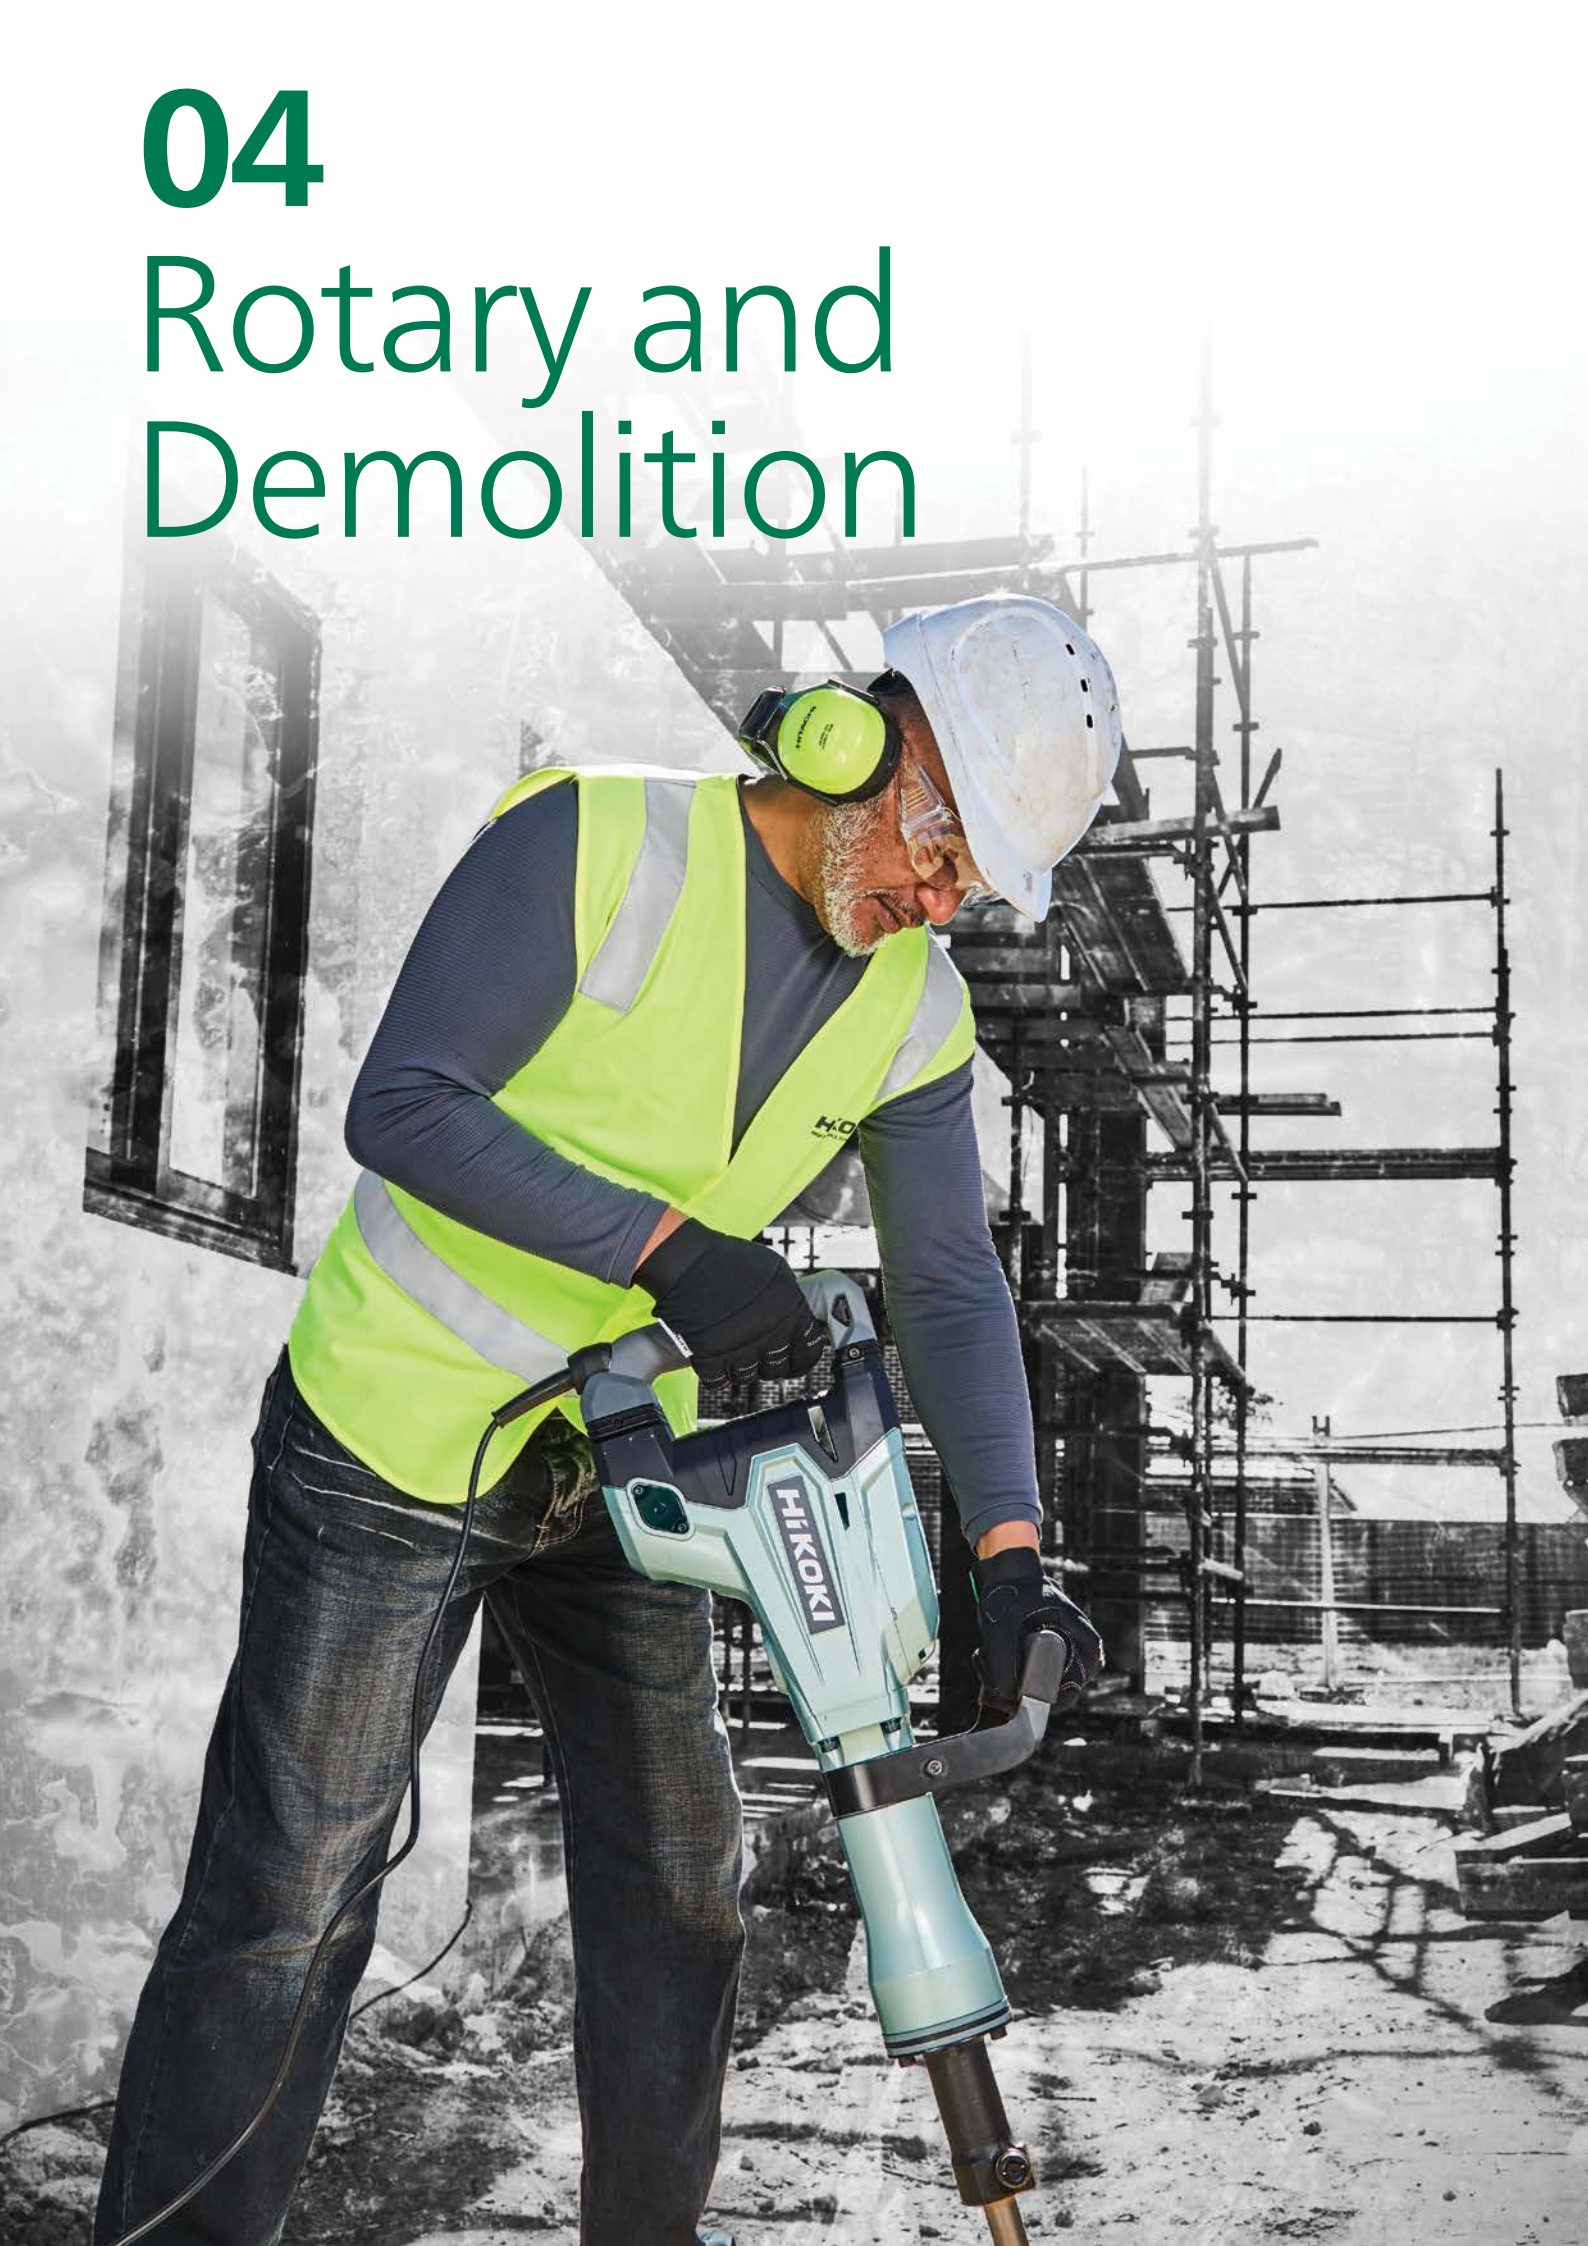

## Quick Reference Guide For Rotary Hammers

Model	Concrete Drilling Dia. (mm)	Brushless Motor	Speed Control		Function Mode			Safety Clutch	Bit Shank Type	
			Variable	Reversible	Hammer Drilling	Drilling Only	Hammering Only		SDS Plus	SDS Max
DH26PC(H1Z)	26		•	•	•	•	•	•		
DH30PC2(H1Z)	30		•		•	•	•	•		
DH40MC(H1Z)	40				•		•		•	
DH40MEY(H1Z)	40	•	•		•		•		•	
DH45MEY(H1Z)	45	•	•		•		•		•	
DH52MEY(H1Z)	52	•	•		•		•		•	

Rotary and Demolition

### DH26PC(H1Z) 26mm SDS Plus Rotary Hammer



- 3-mode action: hammer drilling, drilling only and hammering only
- Idle striking prevention mechanism reduces vibration and noise
- Variable speed
- Forward and reverse



**Specifications**

Bit Shank	SDS Plus	
	Concrete - drill bit	26mm
	Concrete - core bit	50mm
Capacity	Steel	13mm
	Wood	32mm
	Input power	830W

No load speed	0 - 1,100 (min-1)
Full load Impact	0 - 4,300 (min-1)
Joules	3.2j
Weight	2.8kg
Length	367mm
Standard accessories	Side handle, depth gauge and carry case

### DH28PC(H1Z) 28mm SDS Plus Rotary Hammer



- 3-mode action: hammer drilling, drilling only and hammering only
- Idle striking prevention mechanism reduces vibration and noise
- Forward and reverse
- Variable speed



**Specifications**

Bit Shank	SDS Plus	
	Concrete - drill bit	28mm
	Concrete - core bit	80mm
Capacity	Steel	13mm
	Wood	32mm
	Input power	720W
No load speed	0 - 800 (min-1)	

Full load Impact	0 - 4,000 (min-1)
Joules	3.5j
Weight	3.5kg
Length	316mm
Standard accessories	Side handle, depth gauge, and carry case

**BRUSH  
LESS**  
Brushless Motor



AC Brushless Motor Series

**Everlasting  
efficiency.**

**HIKOKI**  
HIGH PERFORMANCE POWER TOOLS

## DH40MC(H1Z) 40mm SDS Plus Rotary Hammer



4966376284573

- 2-mode action: hammer drilling and hammering only
- Safety slip clutch
- 12 stage adjustable tool bit angle
- Large trigger switch for comfort and control



### Specifications

Bit Shank	SDS Max	
Capacity	Concrete - drill bit	40mm
	Concrete - core bit	105mm
Input power	1,100W	
No load speed	620 (min-1)	
Full load Impact	2,800 (min-1)	
Joules	10.5j	
Weight	7.1kg	
Length	448mm	
Standard accessories	Side handle, depth gauge, grease pack and carry case	

Rotary and Demolition

## DH40MEY(H1Z) 40mm SDS Max Brushless Rotary Hammer



4966376284696

- 2-mode action: hammer drilling and hammering only
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate and variable speed
- Can be used with a petrol powered generator
- Safety slip clutch



### Specifications

Bit Shank	SDS Max	
Capacity	Concrete - drill bit	40mm
	Concrete - core bit	105mm
Input power	1,150W	
No load speed	250, 330, 410 & 500 (min-1)	
Full load Impact	1,430, 1,900, 2,370 & 2,850 (min-1)	
Joules	11j	
Weight	7.5kg	
Length	477mm	
Standard accessories	Side handle, depth gauge, grease pack and carry case	



## DH45MEY(H1Z) 45mm SDS Max Brushless Rotary Hammer



- 2-mode action: hammer drilling and hammering only
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate and variable speed
- Can be used with a petrol powered generator
- Safety slip clutch



Rotary and Demolition

### Specifications

Bit Shank	SDS Max	
Capacity	Concrete - drill bit	45mm
	Concrete - core bit	125mm
Input power	1,500W	
No load speed	120, 180, 240 & 310 (min-1)	
Full load Impact	1,200, 1,700, 2,300 & 2,950 (min-1)	
Joules	13.4j	
Weight	9.5kg	
Length	535mm	
Standard accessories	Side handle, depth gauge, grease pack and carry case	

## DH52MEY(H1Z) 52mm SDS Max Brushless Rotary Hammer



- 2-mode action: hammer drilling and hammering only
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate and variable speed
- Can be used with a petrol powered generator
- Safety slip clutch



### Specifications

Bit Shank	SDS Max	
Capacity	Concrete - drill bit	52mm
	Concrete - core bit	160mm
Input power	1,500W	
No load speed	110, 160, 220 & 280 (min-1)	
Full load Impact	1,000, 1,400, 1,900 & 2,400 (min-1)	
Joules	22j	
Weight	11.5kg	
Length	585mm	
Standard accessories	Side handle, depth gauge, grease pack and carry case	

## Quick Reference Guide For Demolition Hammers

Model	Bit Shank Type	Weight (kg)	Brushless Motor	AHB	UVP	Shock Absorbing Handle	Adjustable Side Handle	Impact Energy Per Stroke (Joules)
H45MEY(H1Z)	SDS Max	7.3	•	•	•	•	•	13.5
H60MEY(H1Z)	SDS Max	12.2	•	•	•	•	•	26.5
H65SB3(H1Z)	30mm Hex	18		•	•	•	•	45
H90SG(H1Z)	28.5mm Hex	32		•	•	•		70

Rotary and Demolition

### H41ME(H1Z) 5.1kg SDS Max Demolition Hammer



**COMING SOON**

### H45MEY(H1Z) 7.3kg SDS Max Brushless Demolition Hammer



- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate
- Can be used with a petrol powered generator
- Overload protection

**Specifications**

Bit Shank	SDS Max
Input power	1,150W
Full load Impact	1,430, 1,900, 2,370 & 2,850 (min-1)
Joules	13.5j

Weight	7.3kg
Length	480mm
Standard accessories	280mm bull point chisel, side handle and carry case

## H60MEY(H1Z) 12.2kg SDS Max Brushless Demolition Hammer



4966376288663

- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body) for increased motor durability
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate
- Can be used with a petrol powered generator
- Overload protection



Rotary and Demolition

### Specifications

Bit Shank	SDS Max
Input power	1,500W
Full load Impact	1,500, 1,700, 1,900 & 2,100 (min-1)
Joules	26.5j
Weight	12.2kg
Length	585mm
Standard accessories	280mm bull point chisel, side handle and carry case

## H65SB3(H1Z) 18kg 30mm Hex Demolition Hammer



4966376288786

- High demolishing performance with low vibration and noise
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- Large trigger switch with lock on function
- Service kit available (371002)



### Specifications

Bit Shank	30mm Hex
Input power	1,400W
Full load Impact	1,400 (min-1)
Joules	45j
Weight	18kg
Length	731mm
Standard accessories	Bull point, chisel, hex bar wrench and carry case with wheels

# User Vibration Protection.

Our policy is to design tools with maximum inbuilt protection against excessive vibration, whether equipping them with spring-operated dynamic vibration absorbers or building-in special, vibration absorbing handles. Not only is UVP good for operator safety by helping to safeguard against White Knuckle Syndrome, it's good for business. After all, the higher the degree of comfort and ease of use, the more efficient an operator can be for longer.

Rotary and  
Demolition

## H90SG(H1Z) 32kg 28.5mm Hex Demolition Hammer



- Designed for heavy demolition work
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- Ergonomic soft grip handles
- Ideal substitute for air operated compressor equipment
- Service kit available (338319)

### Specifications

Bit Shank	28.5mm
Input power	2,000W
Full load Impact	1,000 (min-1)
Joules	70j
Weight	32kg
Length	860mm
Standard accessories	Hex bar wrench (M6)



### Hammer Grease



Part No.	Description	Size	Barcode	Suitable Models
981840	Crank mechanism grease	30g	4966375124375	H25PV H41MB H60MEY H60MRV
308471	Crank mechanism grease	70g	4966375124368	H41SC H70SA
980927	Crank mechanism grease	500g	4966375112747	H45MR H45MRY H65SB2 H65SB3
714831	Gear grease	100g	8717574028515	H45ME H45MEY H90SB H90SG

# 05 Fastening



## Quick Reference Guide for Screw Drivers

Model	No Load Speed (min-1)	Power Input (W)	Applicable Fasteners				Weight (kg)
			Machine Screw	Self Drilling Screw	Drywall Screw	Wood Screw	
W6VB3(H1Z)	0 - 2,600	620	6mm	6mm	6mm	5.8mm	1.5
W8VB2(H1Z)	0 - 1,700	620	6mm	8mm	6mm	6.2mm	1.5

### W6VB3(H1Z) Screw Driver



4966376280674

- Ideal for self-drilling / TEK screw
- Variable speed
- Forward and reverse
- Aluminium cover and inner cover for increased durability



#### Specifications

Bit shank	6.35mm hex	Input power	620W
	Machine screw 6mm	No load speed	0 - 2,600 (min-1)
Capacity	Drywall screw 6mm	Weight	1.5kg
	Self-drilling screw 6mm	Length	312mm
	Wood screw 5.8mm	Standard accessories	Magnetic hex socket and sub stopper

### W8VB2(H1Z) Screw Driver



4966376280834

- Ideal for self-drilling / TEK screw
- Variable speed
- Forward and reverse
- Aluminium cover and inner cover for increased durability



#### Specifications

Bit shank	6.35mm hex	Input power	620W
	Machine screw 6mm	No load speed	0 - 1,700 (min-1)
Capacity	Drywall screw 6mm	Weight	1.5kg
	Self-drilling screw 8mm	Length	312mm
	Wood screw 6.2mm	Standard accessories	Magnetic hex socket and sub stopper

### Accessories For Screw Drivers

	Part No.	Description	Barcode	For Model
	752398	Magnetic Bit Holder (41L)	8717472814098	W6VB3, W8VB2
	985322	5/16" Magnetic Hex Socket	4966375115793	W6VB3, W8VB2
	317671	Sublocator for 5/16" Hex Socket	4966375287308	W6VB3, W8VB2

## Quick Reference Guide for Impact Wrenches

Model	Power Input (W)	Brushless Motor	No Load Speed (min-1)	Impact Rate (min-1)	Torque (Nm)	Capacity (mm)		Square Drive (mm)	Weight (kg)
						Ordinary Bolt	High Tension Bolt		
WR16SE(H1Z)	370	•	1,100, 1,300, 1,400, 1,600	1,300, 1,500, 1,700, 1,900	360	12 - 22	12 - 16	12.7	2.5
WR22SE(H1Z)	800	•	1,400	2,000	620	14 - 24	16 - 22	19	4.6
WR25SE(H1Z)	900	•	1,100	1,500	1000	22 - 30	22 - 24	25.4	7.7



Fastening

### WR16SE(H1Z) 12.7mm (1/2") Brushless Impact Wrench



- Push button adjustable impact rate
- Soft start reduces kickback when starting
- Overload protection
- Can be used with a petrol powered generator

#### Specifications

Drive	12.7mm (1/2")	
Capacity	Ordinary bolt	12 - 22mm
	High tension bolt	12 - 16mm
Input power	370W*	
Torque	360Nm	
No load speed	1,100, 1,300, 1,400, 1,600 (min-1)	
Impact rate	1,300, 1,500, 1,700, 1,900 (min-1)	
Weight	2.5kg	
Length	228mm	
Standard accessories	Belt hook and carry case. Socket not included	

\*370W brushless motor is equivalent to 440W brushed motor

## WR22SE(H1Z) 19mm (3/4") Brushless Impact Wrench



4966376290031

- AHB (Aluminium Housing Body)
- Soft grip handle
- Adjustable side handle
- Can be used with a petrol powered generator



### Specifications

Drive	19mm (3/4")	
Capacity	Ordinary bolt	14 - 24mm
	High tension bolt	16 - 22mm
Input power	800W*	
Torque	620Nm	
No load speed	1,400 (min-1)	
Impact rate	2,000 (min-1)	
Weight	4.6kg	
Length	280mm	
Standard accessories	Side handle and carry case. Socket not included	

\*800W brushless motor is equivalent to 950W brushed motor

## WR25SE(H1Z) 25.4mm (1") Brushless Impact Wrench



4966376290222

- AHB (Aluminium Housing Body)
- Soft grip handle
- Adjustable side handle
- Can be used with a petrol powered generator




### Specifications

Drive	25.4mm (1")	
Capacity	Ordinary bolt	22 - 30mm
	High tension bolt	22 - 24mm
Input power	900W*	
Torque	1,000Nm	
No load speed	1,100 (min-1)	
Impact rate	1,500 (min-1)	
Weight	7.7kg	
Length	340mm	
Standard accessories	Side handle and carry case. Socket not included	

\*900W brushless motor is equivalent to 1070W brushed motor



# 06 Grinding and Cutting

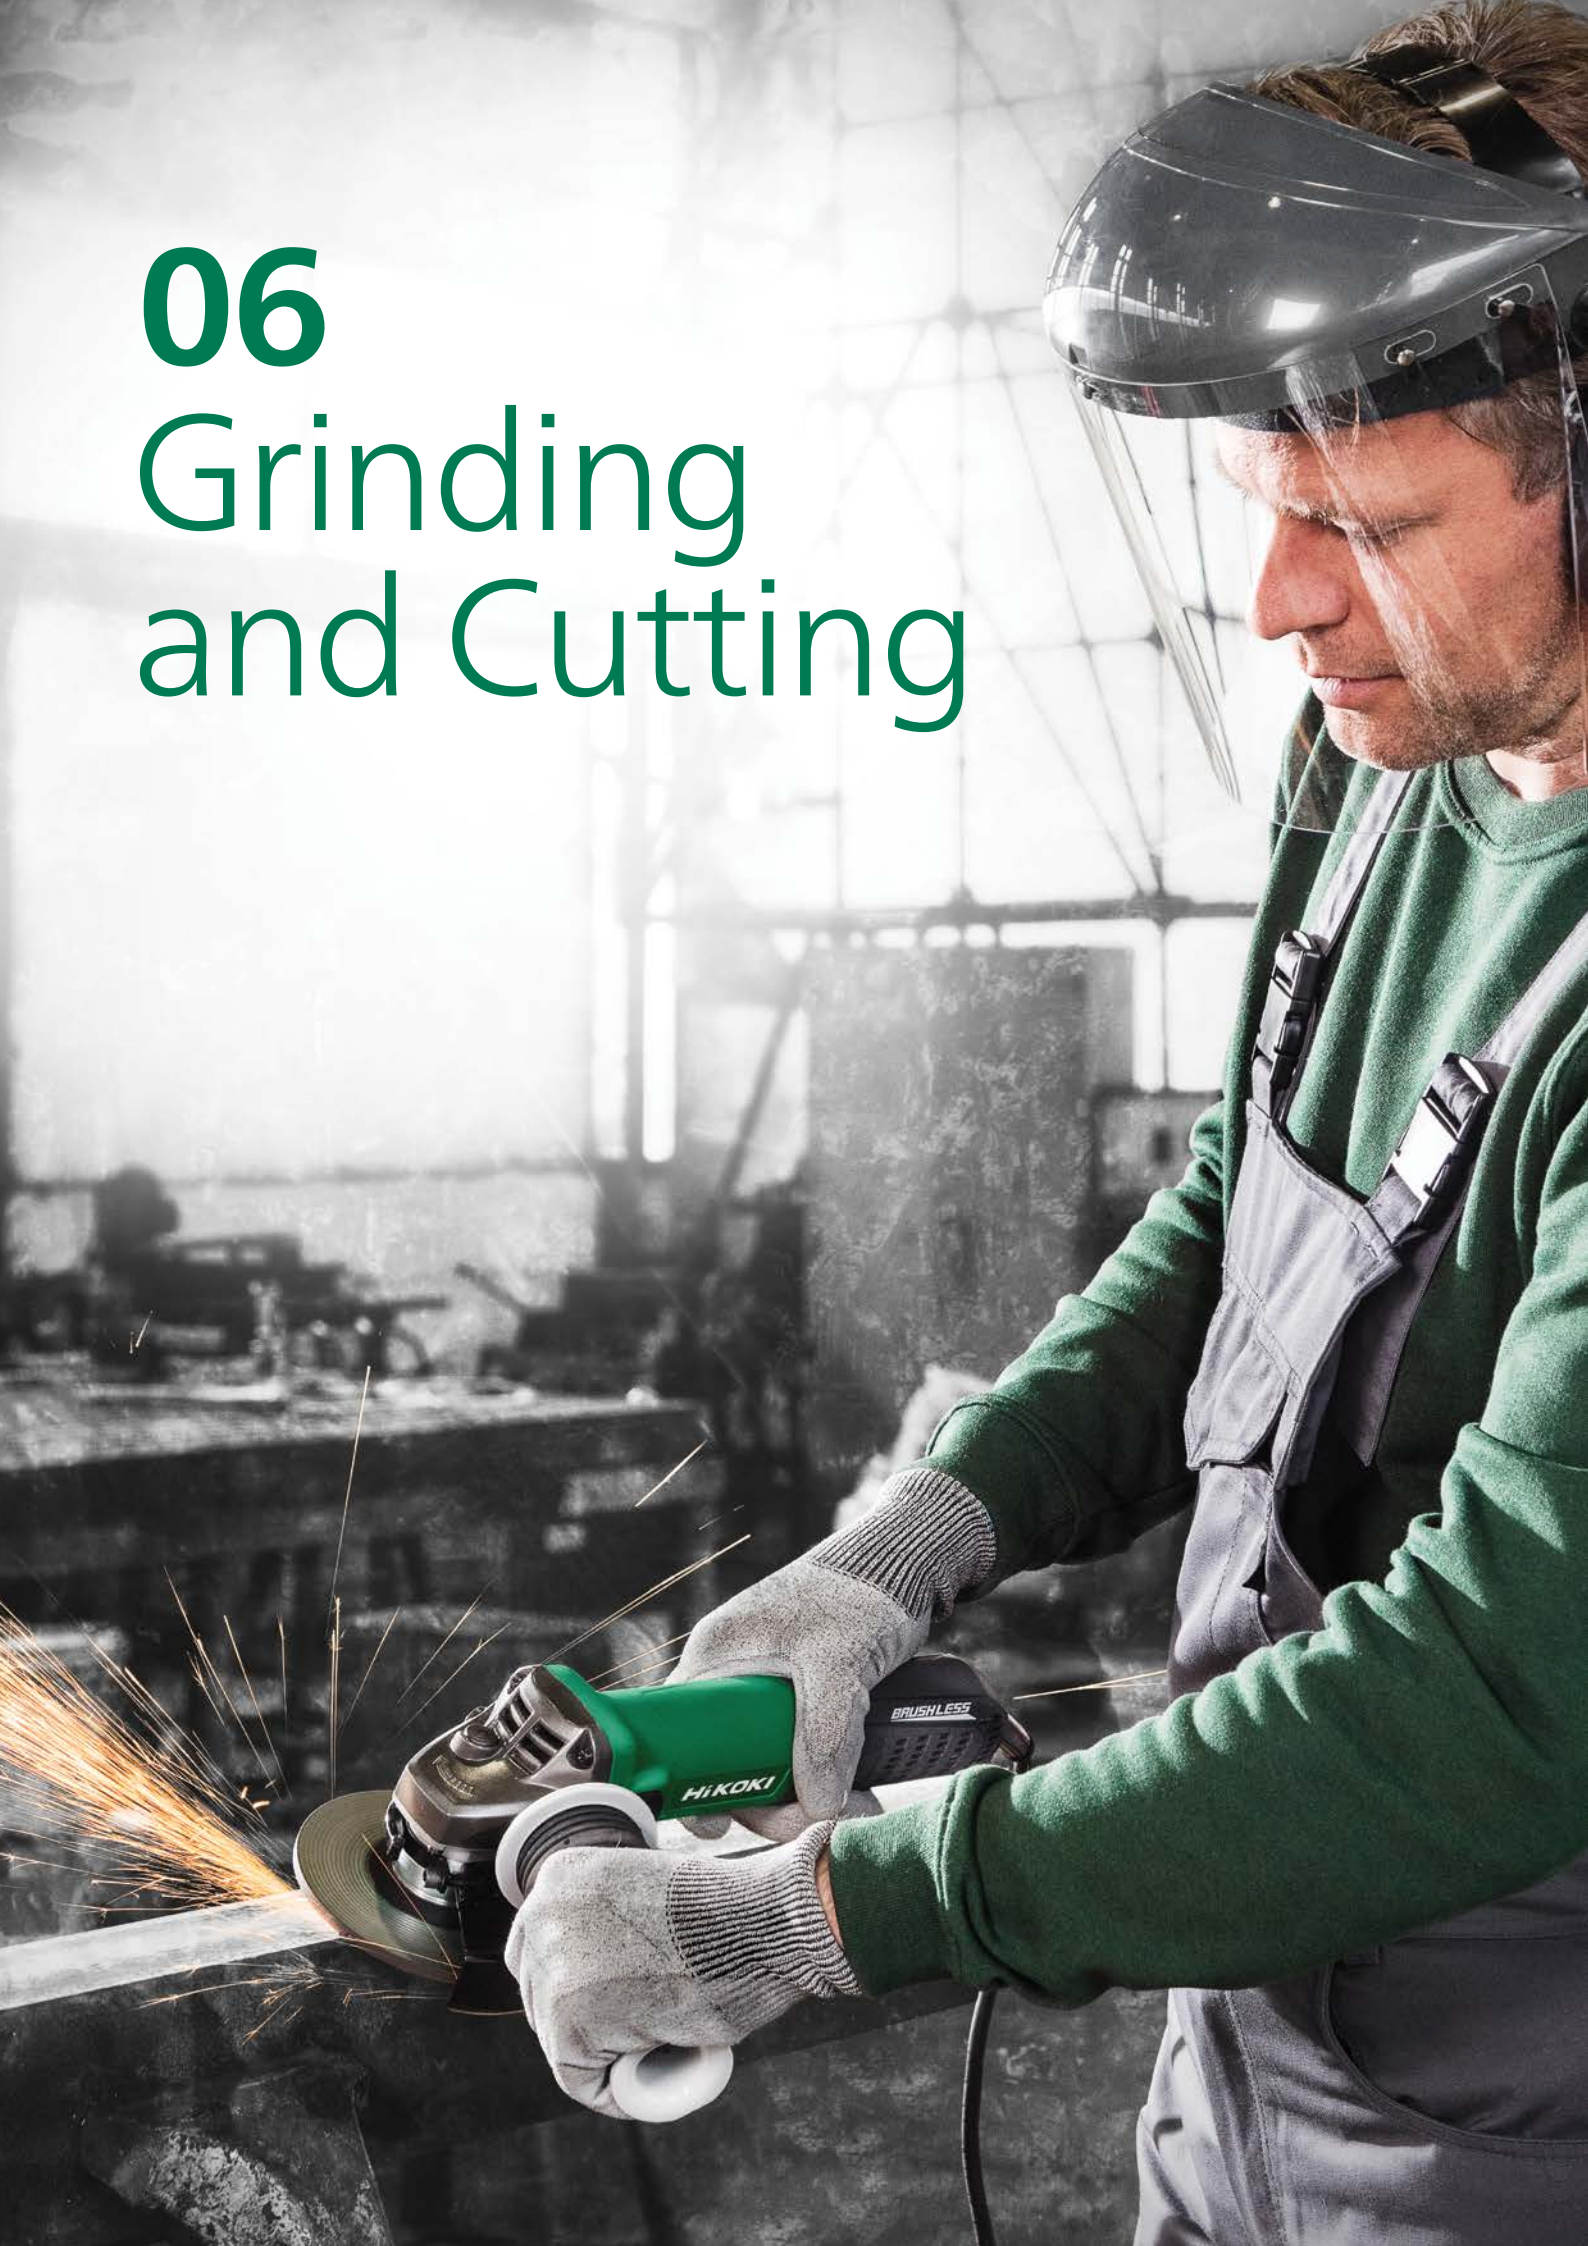

## Quick Reference Guide for Screw Drivers

Model	Wheel Diameter (mm)	Input Power (W)	No Load Speed (min-1)	Switch Type	Safety (Deadman) Switch	Lock On Switch	Anti-vibration Handle	UVP	Spindle Thread	Weight (kg)
G10SR4(H6Z)	100	730	10,000	Slide		•			M10 x 1.5	1.7
G13SR4(H6Z)	125	730	10,000	Slide		•			M14 x 2	1.8
G13SB3(H1Z)	125	1,300	11,000	Slide		•			M14 x 2	1.9
G13BY(H1Z)	125	1,700	11,000	Slide		•		•	M14 x 2	2.8
G13VE(H1Z)	125	1320	2,800 - 10,000	Slide		•	•		M14 x 2	2.1
G13SE2(H1Z)	125	1,200	11,000	Paddle	•		•		M14 x 2	1.9
G13YC2(H1Z)	125	1,430	10,500	Paddle	•		•		M14 x 2	2.0
G13SC2(H1Z)	125	1,200	10,000	Trigger	•		•		M14 x 2	2.8
G18UDY(H1Z)	180	2,400	8,500	Trigger	•		•	•	M14 x 2	6.4
G23ST(H1Z)	230	2,000	6,600	Trigger	•				M14 x 2	5.0
G23SE2(H1Z)	230	2,400	6,600	Trigger	•		•		M14 x 2	5.0
G23UB2(H1Z)	230	2,400	6,600	Trigger	•		•		M14 x 2	5.0
G23UDY(H1Z)	230	2,400	6,600	Trigger	•		•	•	M14 x 2	6.6

### G13BY(H1Z) 125mm Angle Grinder with Slide Switch



4966376324682



- Powerful motor for heavy-duty applications
- UVP (User Vibration Protection) through auto anti-vibration balancing technology
- Lockable slide switch
- Mechanical brake, soft start, slip clutch mechanism, restart protection, and overload protection
- Tool-less disc change and wheel guard adjustment
- Two position anti-vibration handle

#### Specifications

Wheel diameter	125mm
Input power	1,700W
No load speed	11,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2
Weight	2.8kg
Length	335mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## Power on long and strong.

HiKOKI brushless AC motors deliver greater durability and longer life even under heavy use. There are no carbon brushes to regularly replace and no risk of armature burnout, or commutator wear. Because brushless motors run cooler, look forward to stable performance even when there's voltage drop from using long extension cords.



Grinding  
and Cutting

### G13VE(H1Z) 125mm Brushless Angle Grinder with Slide Switch



4966376274994

- Lightweight and slim design
- Kickback protection, restart protection and soft start control
- Lockable slide switch on side
- Variable speed
- Can be used with a petrol powered generator
- Tool-less wheel guard adjustment

#### Specifications

Wheel diameter	125mm
Input power	1,320W
No load speed	2,800 - 10,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2
Weight	2.1kg
Length	305mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G10SR4(H6Z) 100mm Angle Grinder with Slide Switch



4966376271856

- Lightweight and compact
- Lockable slide switch
- Two position side handle



### Specifications

Wheel diameter	100mm
Input power	730W
No load speed	10,000 (min-1)
Hole diameter	16mm
Spindle thread	M10 x 1.5

Weight	1.7kg
Length	258mm
Standard accessories	Side handle, grinding wheel, wrench and carry case

## G13SR4(H6Z) 125mm Angle Grinder with Slide Switch



4966376274451

- Lightweight and compact
- Lockable slide switch two position side handle



### Specifications

Wheel diameter	125mm
Input power	730W
No load speed	10,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	1.8kg
Length	258mm
Standard accessories	Side handle, grinding wheel, wrench and carry case

## G13SB3(H1Z) 125mm Angle Grinder with Slide Switch



4966376273577

- Lightweight and compact
- Lockable slide switch
- Two position side handle



### Specifications

Wheel diameter	125mm
Input power	1,300W
No load speed	11,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	1.9kg
Length	283mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G13SE2(H1Z) 125mm Angle Grinder with Paddle (Deadman) Switch



4966376273911

- Paddle (deadman) switch for user safety
- Tool-less wheel guard adjustment
- Two position anti-vibration handle



### Specifications

Wheel diameter	125mm
Input power	1,200W
No load speed	11,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	1.9kg
Length	321mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G13YC2(H1Z) 125mm Angle Grinder with Paddle (Deadman) Switch



4966376275045

- Paddle (deadman) switch for user safety
- Constant speed control, soft start, overload protection, kick back protection and restart protection
- Tool-less wheel guard adjustment
- Suitable for mining, petroleum and gas industry, maintenance and construction industries
- Two position anti-vibration handle



### Specifications

Wheel diameter	125mm
Input power	1,430W
No load speed	10,500 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	2.0kg
Length	323mm
Standard accessories	Anti-vibration side handle, grinding wheel, hex wrench and wrench

## G13SC2(H1Z) 125mm Angle Grinder with Trigger (Deadman) Switch



4966376273867

- Powerful motor for heavy-duty applications
- Rear trigger (deadman) switch for user safety and manoeuvrability
- Three position anti-vibration handle



### Specifications

Wheel diameter	125mm
Input power	1,200W
No load speed	10,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	2.8kg
Length	391mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G18UDY(H1Z) 180mm Angle Grinder with Trigger (Deadman) Switch



4966376275960

- UVP (User Vibration Protection) on body and side handle
- Rear trigger (deadman) switch for user safety and manoeuvrability
- Soft start and restart protection
- Tool-less wheel guard adjustment
- Three position anti-vibration handle



### Specifications

Wheel diameter	180mm
Input power	2,400W
No load speed	8,500 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	6.4kg
Length	500mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G23ST(H1Z) 230mm Angle Grinder with Trigger (Deadman) Switch



4966376276660

- Rear trigger (deadman) switch for user safety and manoeuvrability
- Tool-less wheel guard adjustment
- Three position handle



### Specifications

Wheel diameter	230mm
Input power	2,000W
No load speed	6,600 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	5.1kg
Length	469mm
Standard accessories	Side handle and wrench

## G23SE2(H1Z) 230mm Angle Grinder with Trigger (Deadman) Switch



4966376276462

- Rear trigger (deadman) switch for user safety and manoeuvrability
- Tool-less wheel guard adjustment
- Three position anti-vibration handle



### Specifications

Wheel diameter	230mm
Input power	2,400W
No load speed	6,600 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	5.0kg
Length	478mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G23UB2(H1Z) 230mm Angle Grinder with Trigger (Deadman) Switch



4966376277148

- Rear trigger (deadman) switch for user safety and manoeuvrability
- Electronic soft start
- Tool-less wheel guard adjustment
- Three position anti-vibration handle



### Specifications

Wheel diameter	230mm
Input power	2,400W
No load speed	6,600 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2
Weight	5.0kg
Length	478mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G23UDY(H1Z) 230mm Angle Grinder with Trigger (Deadman) Switch



4966376277216

- UVP (User Vibration Protection) on body and side handle
- Rear trigger (deadman) switch for user safety and manoeuvrability
- Electronic soft start and restart protection
- Tool-less wheel guard adjustment
- Three position anti-vibration handle



### Specifications

Wheel diameter	230mm
Input power	2,400W
No load speed	6,600 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2
Weight	6.6kg
Length	500mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## GP2S2(H1Z) 25mm Die Grinder



4966376277568

- High speed for better finishing applications
- Extended front housing for hard to reach areas
- All ball bearing construction for extended tool life



### Specifications

Max. wheel diameter	25mm
Collet chuck	6.35mm (standard)
Input power	520W
No load speed	29,000 (min-1)
Weight	1.7kg
Length	359mm
Standard accessories	Side handle and wrench

## GP3V(H1Z) 25mm Die Grinder



4966376277674

- High speed for better finishing applications
- Constant and variable speed control
- Soft start
- Extended front housing for hard to reach areas
- All ball bearing construction for extended tool life



### Specifications

Max. wheel diameter	25mm
Collet chuck	6.35mm (standard)
Input power	760W
No load speed	7,000 - 29,000 (min-1)
Weight	1.8kg
Length	406mm
Standard accessories	Side handle and wrench

## GP5V(H1Z) 50mm Die Grinder



4966376277735

- High speed for better finishing applications
- Constant and variable speed control
- Soft start
- Extended front housing for hard to reach areas
- All ball bearing construction for extended tool life



### Specifications

Max. wheel diameter	50mm
Collet chuck	6.35mm (standard)
Input power	760W
No load speed	2,000 - 8,300 (min-1)
Weight	1.8kg
Length	406mm
Standard accessories	Side handle and 2 x wrench



## Building on the legacy.

Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details that ensures the professional in finishing every single job as easy as possible.

### CC14SF(6WZ) 355mm Metal Cut-Off Saw



9323624028580

- One touch vice system for quick feeding and clamping
- Spindle lock for easy wheel change
- Sturdy aluminium housing
- Spark diversion guard
- Soft grip handle
- Cuts left and right at 45°



Grinding and  
Cutting

#### Specifications

Wheel diameter	355mm	
	Bar diameter	65mm
	Pipe diameter	120mm
Capacity	130 x 115mm	
	Rectangular steel	235 x 70mm
		195 x 100mm
Input power	2,400W	
No load speed	3,800 (min-1)	
Weight	16.5kg	
Dimensions	318 x 603 x 603mm	
Standard accessories	8mm hex key and 6 cut off wheels	

# Reliable performance.

When you can't afford the downtime, stick with old faithful, Japanese engineered, trade grade tools.



Grinding and Cutting

## CN16SA(H1Z) 1.6mm Nibbler



- Lightweight and compact with a small grip circumference
- 3 position die holder for straight, right and left cutting
- Lockable slide switch for user comfort
- Punch and die service life: 300m of cutting into 1.6mm steel

### Specifications

Capacity	Mild steel	75mm
	Stainless	130mm
	Aluminium	110 x 110mm
Input power	400W	
No load speed	2,300 (min-1)	
Weight	1.6kg	
Length	250mm	
Standard accessories	2 x hex bar wrench	

### Recommended Service Life of Punch and Die for CN16SA

Test Condition	Service Life
1.6mm Mild Steel Plate	300m
1.6mm Mild Steel Plate (Corrugated or trapezoidal shape)	50m
1.2mm Stainless Steel Plate	200m

### Punch and Die




Punch




Die Assembly

Part No.	Part Name	Capacity
998030	Punch	1.6mm
998039	Die Assembly	


## Wheel Washers

	Part No.	Diameter	For Model	Barcode
	320497	30mm	G10SD2 / G10SQ / G10SN / G10SR3 / G10SR4	4966375309512
	937817Z	42mm	G12SE2 / G12SR3 / G13SN / G13SR3 / G13SE2 / G13SB3 / G13SR3 / G13YF / G13YA / G12SE2 / G13SE2 / G13SQ / G13YC2 / G18DBAL / G18DSL / G13SW / G12SR4 / G13SR4 / G13SS2 / G13VE	4966375447252
	937907Z	42mm	G18UBY / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY	4966375447481
	937908Z	90mm	G18SE3 / G23SS / G23SE2 / G23UB2 / G18UDY / G23UDY	4966375447498
	312323	100mm	CM12Y	4966375245223


## Wheel Nuts

	Part No.	Diameter	Thread Size	For Model	Barcode
	339578	30mm	Outer M10 x 1.5	G10SQ / G10SR3 / G10SD2 / G10SN / G10SR4	4549115112247
	339579	45mm	Outer M14 x 2	G12SR4 / G13SR4 / G13SS2 / G13VE / G18DBAL / G12SR3 / G13SR3 / G13SB3 / G13YF / G13YA / G12SE2 / G13SE2 / G13SQ / G13YC2 / G18DSL / G13SW	4549115112254
	372702	40mm	Outer M14 x 2	G13BY	4549115171497
	937909Z	50mm	Outer M14 x 2	G13SC2 / G18SE3 / G23SE2 / G18UBY / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY	4966375447504
	937917Z	90mm	Outer M14 x 2	G23SS / G18UDY / G23UDY	4966375447542
	312324	100mm	Outer	CM12Y	4966375245230

## Safety Guards

	Part No.	Type	For Model	Barcode
	331076	Standard	G10SN	4966375713302
	301948	Standard	S10SR3 / G10SQ	4966375173144
	338856	Standard	G10SR4	4549115102293
	315492	Standard	G12SR3	4966375270201
	311745	Quick Release	G12SE2	4966375240679
	338848	Standard	G12SR4	4549115099180
	319116	Standard	G13SR3 / G18DSL	4966375298588
	333840	Quick Release	G18DBAL	4966375884354
	320192	Standard	G13SB3	4966375307051
	311742	Quick Release	G13VA / G13YF / G13SE2 / G13SB3 / G13YC2 / G13SW	4966375240648
	372915		G13BY	4549115171565
	331766	Standard	G13SQ	4966375830382
	320213	Standard	G13SC2	4966375307242
	338845	Standard	G13SR4 / G13SS2	4549115099159
	321543	Quick Release	G18SE3 / G18UBY / G18UDY	4966375316961
330036	Standard	G23SS	4966375693482	
321547	Quick Release	G23SE2 / G23UB2 / G23UBY / G23UDY	4966375317005	
	338292	Standard	G23ST	4549115093379

## Dust Collectors

	Part No.	Type	For Model	Barcode
	323918	Dust Collector	G10SD2 / G10SR3 / G10SN	4966375602688
	338497	Dust Collector	G18DBAL	4549115106918

## Cutting Guard Clip



Part No.	Type	For Model	Barcode
372701	Cutting Guard Clip	G13BY	4549115171947

## Spanners and Wrenches

Part No.	Type	For Model	Barcode
313933	Pin Spanner	G10SQ / G10SR3 / G10SD2 / G13SQ / G10SN / G10SR4 / G12SR4 /	4966375123354
938332Z	Pin Spanner	G12SE2 / G12SR3 / G13SR3 / G13YF / G13YA / G13YC2 / G13SB3 / G13SE2 / G13SW / G10SR4 / G12SR4 / G13SR4 / G18DBAL / G18DSL / G13SS2 / G13VE	4966375448112
325491	Pin Spanner	G13SC2 / G18SE3 / G23SE2 / G18UBY / G23SS / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY	4966375639688
931161	Wrench 17mm and 19mm (C)	GP13	4966375439257
951211	Wrench 17mm	CC16SA	4966375128175
948163	Wrench 19mm and 21mm	CC16SB	4966375456254
955857	Hex Bar	CC14SF	4966375472117
936553	Wrench 12mm		4966375127529
936638	Wrench 17mm		4966375128144
332812	6mm Collet Chuck	GP2 / GP2S2 / GP3V / GP5V	4966375863007
331422	1/4" Collet Chuck		4966375721772
985136	1/8" Collet Chuck		4966375543763

## Side Handles

Part No.	Type	For Model	Barcode
302142	Standard	G10SQ / G10SD2 / G13SQ / G10SN / G10SR4 / G12SR4 / G13SR4 / G13SS2	4966375174554
318312	Standard	G10SR3 / G12SR3 / G13SR3 / G18DSL	4966375292777
994322	Standard	G12SE2 / G13SC2 / G13SE2 / G13SB3	4966375137009
937981	Standard	G18SE3 / G23SS / G23SE2 / G23UB2 / G23ST	4966375447740
336865	Anti-Vibration (Black & Grey)	G13SB3 / G13SE2 / G13SR3 / G13YF / G13VA / G13YC2 / G13SW / G18DBAL / G13VE / G13BY	4549115066359
336864	Anti-Vibration (Black & Grey)	G18SE3 / G18UBY / G23SE2 / G23UB2 / G23UBY / G18SE3 / G18UBY / G23SE2 / G23UB2 / G23UBY / G18UDY / G23UDY	4549115066472

## Rubber Pads

Part No. (Pad)	Part No. (Nut)	Pad Size	Thread	Barcode
936558Z	935513	100mm	M10 x 1.5	4966375446521
937825Z	937826Z	115mm	M14 x 2	4966375447269
953247Z	953246Z	180mm	M14 x 2	4966375869653



# 07 Polishing and Sanding

## Quick Reference Guide for Sanding and Polishing

Model	Type	Sheet / Pad Size (mm)	Input Power (W)	No Load Speed (min-1)	Dust Collection	Weight (kg)
SV12SG(H1Z)	Orbital Sander	110 x 100	200	14,000	•	1.1
FSV10SA(H1Z)	Orbital Sander	92 x 184	160	10,000	•	1.3
SV13YB(H1Z)	Random Orbital	125	230	12,000	•	1.4
SV13YA(H1Z)	Random Orbital	125	230	7,000 - 12,000	•	1.4
SV15YC(H1Z)	Random Orbital	150	350	4,200 - 11,000	•	2.5
SB8V2(H1Z)	Belt Sander	76 x 533	1,020	250 - 450	•	4.3
SP18VA(H1Z)	Sander / Polisher	180	1,250	0 - 600 / 0 - 3,400		2.8

### SV12SG(H1Z) ¼ Sheet Orbital Palm Sander



- Large soft grip for ease of use and allows motor ventilation
- Hook and loop base with additional clamps allows use of standard or hook and loop paper
- Excellent dust collection with standard dust bag
- Ideal for close edge work



#### Specifications

Pad size	110 x 100mm
Input power	200W
No load speed	14,000 (min-1)
Orbital diameter	1.5mm

Weight	1.1kg
Length	137mm
Standard accessories	Sanding paper and dust bag

Sanding and Polishing

### FSV10SA(H1Z) ⅓ Sheet Orbital Sander



- Large soft grip for ease of use and allows motor ventilation
- Hook and loop base with additional clamps allows use of standard or hook and loop paper
- Excellent dust collection with standard dust bag
- Ideal for close edge work



#### Specifications

Pad size	92 x 184mm
Input power	160W
No load speed	Spindle 10,000 (min-1) Orbit 20,000 (min-1)
Orbital diameter	2mm

Weight	1.3kg
Length	184mm
Standard accessories	Sanding paper, punch plate and dust bag

## SV13YB(H1Z) 125mm Random Orbital Sander



4966376280032

- Random orbit sanding action for smooth finishes
- Large soft grip for ease of use and allows motor ventilation
- Hook and loop base
- Excellent dust collection with standard dust bag



### Specifications

Pad size	125mm
Input power	230W
No load speed	12,000 (min-1)
Orbital diameter	3.2mm
Weight	1.4kg
Length	145mm
Standard accessories	Sanding paper, dust bag and carry case

## SV13YA(H1Z) 125mm Random Orbital Sander with Variable Speed



4966376279838

- Random orbit sanding action for smooth finishes
- Large soft grip for ease of use and allows motor ventilation
- Variable speed and stable speed control to suit multiple applications
- Hook and loop base
- Excellent dust collection with standard dust bag



### Specifications

Pad size	125mm
Input power	230W
No load speed	7,000 - 12,000 (min-1)
Orbital diameter	3.2mm
Weight	1.4kg
Length	145mm
Standard accessories	Sanding paper, dust bag and carry case

# Turbo boost technology.

When you need that little extra kick, hit the TurboBoost switch to override the variable speed setting and power on long and strong.



Sanding and Polishing

## SV15YC(H1Z) 150mm Random Orbital Sander with Variable Speed



4966376280131

- Adjustable dual orbit diameter enables the orbit to be changed between 2.8mm and 6.2mm for greater sanding versatility
- TurboBoost switch
- Variable speed dial to suit multiple applications
- Hook and loop base
- Excellent dust collection with standard dust bag

### Specifications

Pad size	150mm
Input power	350W
No load speed	4,200 - 11,000 (min-1)
Orbital diameter	2.8mm / 6.2mm
Weight	2.5kg
Length	173mm
Standard accessories	Front handle, sanding paper, dust bag and hex bar wrench



## SP18VA(H1Z) 180mm Sander Polisher



- Variable speed dial to suit multiple applications
- Soft start to prevent kickback upon start up
- Overload protection control to extend tool life



### Specifications

Wheel diameter	180mm	
Input power	1,250W	
No load speed	Low	0 - 600 (min-1)
	High	0 - 3,400 (min-1)
Spindle thread	M14 x 2	
Weight	1.3kg	
Length	415mm	
Standard accessories	Loop handle, rubber pad, wool bonnet, sanding disc and wrench	

## SB8V2(H1Z) 76mm Belt Sander



- Variable speed dial to suit multiple applications
- Visible sanding position through transparent cover
- Suitable for close edge work due to design
- Excellent dust collection with standard dust bag



### Specifications

Belt size	76 x 533mm	
Input power	1,020W	
No load speed	250 - 450 (min-1)	
Weight	4.3kg	
Length	318mm	
Standard accessories	Sanding belt and dust bag	

## Sander & Polisher Attachments



Part No.	Description	Diameter (mm)	Comments	For Model	Barcode
953247Z	Rubber Pad	180	Rigid	SAT180 SP18VA	4966375468653



949103	Wool Bonnet	180	-	SAT180 SP18VA	4966375107057
--------	-------------	-----	---	------------------	---------------



753817	Backing Pad	150	Hook & Loop	SAY150A	8717574033823
--------	-------------	-----	-------------	---------	---------------



324209	Backing Pad	125	Hook & Loop	SV13YA SV13YB	4966375621577
--------	-------------	-----	-------------	------------------	---------------

309419	Backing Pad	125	Hook & Loop	FSV13Y	4966375222699
--------	-------------	-----	-------------	--------	---------------

371839	Backing Pad	150	Hook & Loop	SV15YC	4549115159198
--------	-------------	-----	-------------	--------	---------------

## Dust Bags



Part No.	For Model	Barcode
310339	FSV10SA / SV12SH / SV12SG / SV13Y B / SV13YA	4966375229445
300177	SV12SD	4966375165149
323011	SB8V2 / SB10V2	4966375328575
371871	SV15YC	4549115159228

It's faster  
and easier  
with HIKOKI.

# 08 Sawing



## Quick Reference Guide for Circular Saws

Model	Blade Diameter (mm)	Max. Cutting Depth (mm)	Input Power (W)	No Load Speed (min-1)	Dust Collection Capable	Base Material	Weight (kg)
C7UR(H6Z)	185	60	1,800	6,800	•	Aluminium	5.1
C7YA(FCBZ)	185	60	1,400	5,500	•	Aluminium	4.9
C7MFA(H6Z)	190	68	1,010	5,500	•	Aluminium	3.6
C9SA3(H6Z)	235	86	2,000	5,200	•	Aluminium	7.0

### C7UR(H6Z) 185mm Circular Saw



4966376262595

- Heavy-duty high speed motor for faster cutting
- Reinforced aluminium base for increased strength
- Integrated blower removes sawdust from the cutting line
- Includes hard carry case for transport and storage plus 2 x TCT blades for added value



#### Specifications

	Max. cut depth 90°	60mm
Capacity	Max. cut depth 45°	47mm
	Max. cut depth 55°	38mm
Input power	1,800W	
No load speed	6,800 (min-1)	
Blade diameter	185mm	
Blade bore	20mm	
Weight	5.1kg	
Length	308mm	
Standard accessories	2 x TCT blades, wrench, guide and carry case	

### C7MFA(H6Z) 190mm Circular Saw



4966376291991

- Strong and lightweight for increased durability and user comfort
- Die-cast aluminium base for increased strength
- Takes both 185mm and 190mm blades for added versatility
- Includes 2 x TCT blades for added value



#### Specifications

Capacity	Max. cut depth 90°	68mm
	Max. cut depth 45°	47mm
Input power	1,010W	
No load speed	5,500 (min-1)	
Blade diameter	190mm & 185mm	
Blade bore	20mm	
Weight	3.6kg	
Length	291mm	
Standard accessories	2 x TCT blades, wrenches and guide	

## C9SA3(H6Z) 235mm Circular Saw



9323624028573

- Heavy-duty high speed motor for faster cutting
- Die-cast aluminium base for increased strength
- Integrated blower removes sawdust from the cutting line
- Low noise and vibration
- Includes 2 x TCT blades for added value



### Specifications

Capacity	Max. cut depth 90°	86mm
	Max. cut depth 45°	65mm
Input power	2,000W	
No load speed	5,200 (min-1)	
Blade diameter	235mm	
Blade bore	25mm	
Weight	7kg	
Length	397mm	
Standard accessories	2 x TCT blades, side handle, dust port, short lever, 6mm wrench and guide	

## C7YA(FCBZ) 185mm Dust Collection Circular Saw



9323624028566

- Efficient dust suction. Compatible with dust bag, dust guide and extraction systems
- Die-cast aluminium base for increased strength
- Transparent blade cover to shield the scattering of dust
- Specifically built to cut fibre cement boards



### Specifications

Capacity	Max. cut depth 90°	60mm
	Max. cut depth 45°	47mm
Input power	1,400W	
No load speed	5,500 (min-1)	
Blade diameter	185mm	
Blade bore	20mm	
Weight	4.9kg	
Length	299mm	
Standard accessories	Fibre cement blade, wrench, dust collector and dust bag	

## C10FCE2(H1Z) 255mm Compound Mitre Saw



- Large 280mm base provides stable cutting
- Large fence height increases job stability and safety
- Electronic brake for increased user safety
- Positive mitre stops for quick and easy adjustment
- D handle for ergonomical cutting action
- Lightweight for easy transportation

### Specifications

Capacity	Mitre angle	0 - 52° left & right
	Bevel angle	0 - 45° left
	Positive mitre angle stop	0, 15, 22.5, 31.6, 45°
Input power	1,520W	
No load speed	5,000 (min-1)	
Blade diameter	255mm	
Blade bore	25.4mm	
Weight	11.9kg	
Dimensions	460 x 628 x 561mm	
Standard accessories	Blade, dust bag, vice assembly, 30mm washer and box wrench	



### Maximum Cutting Capacity for C10FCE2

0° (Right angle)	59mm x 114mm
	89mm x 101mm
Mitre right / left 45°	59mm x 102mm
	89mm x 70mm
Mitre right / left 52°	59mm x 89mm
	89mm x 54mm
Bevel left 45°	41mm x 144mm
Mitre right / left 45° + Bevel left 45°	41mm x 102mm

## C8FSE(H1Z) 216mm Slide Compound Mitre Saw



- Dual linear ball bearings guide the slide for superior accuracy
- Die cast base with turn table for increased durability
- Positive mitre stops for quick and easy adjustment
- Quick change depth adjustment guide
- Lightweight for easy transportation

### Specifications

Capacity	Mitre angle	0 - 45° left & 0 - 57° right
	Bevel angle	0 - 48° left & 0 - 5° right
	Positive mitre angle stop	0, 15, 22.5, 31.6, 45°
Input power	1,050W	
No load speed	5,500 (min-1)	
Blade diameter	216mm	
Blade bore	30mm	
Weight	14kg	
Dimensions	555 x 790 x 485mm	
Standard accessories	Blade, dust bag, vice assembly and wrench	



### Maximum Cutting Capacity for C8FSE

0° (Right angle)	65mm x 312mm
	75mm x 262mm
Mitre right / left 45°	65mm x 220mm
	75mm x 185mm
Mitre right 57°	65mm x 170mm
	75mm x 140mm
Bevel left 45°	45mm x 312mm
	50mm x 252mm
Bevel right 5°	60mm x 312mm
	70mm x 252mm
Mitre right / left 45° + Bevel left 45°	45mm x 220mm
	50mm x 170mm
Mitre right / left 45° + Bevel right 5°	60mm x 220mm
	70mm x 170mm

# We take pride in our heritage.

70 years of Japanese technological knowledge, skills and experience is what we're most proud of. We develop products that will make even the toughest job as easy and comfortable as possible.



## C10FSB(H1Z) 255mm Slide Compound Mitre Saw



4966376290659

- Poly v-belt and motor driving system for longer service life
- Soft start to reduce recoil force during motor start up
- Electronic constant speed control
- Positive mitre stops for quick and easy adjustment

### Specifications

Capacity	Mitre angle	0 - 45° left & 0 - 57° right
	Bevel angle	0 - 45° left & right
	Positive mitre angle stop	0, 15, 22.5, 31.6, 45°
Input power	1,450W	
No load speed	3,800 (min-1)	
Blade diameter	262mm	
Blade bore	25.4mm	
Weight	19.5kg	
Dimensions	525 x 1050 x 615mm	
Standard accessories	Blade, dust bag, vice assembly, and wrench	

### Maximum Cutting Capacity for C10FSB

0° (Right angle)	88mm x 312mm
	91mm x 300mm
Mitre right / left 45°	88mm x 218mm
	91mm x 200mm
Mitre right 57°	88mm x 165mm
	91mm x 150mm
Bevel left 45°	55mm x 305mm
	60mm x 290mm
Bevel right 45°	30mm x 305mm
	35mm x 290mm
Mitre right / left 45° + Bevel left 45°	55mm x 218mm
	60mm x 200mm
Mitre right / left 45° + Bevel right 45°	30mm x 218mm
	35mm x 200mm

## FCJ65V3(H1Z) 65mm Jig Saw



- Variable speed by dial and trigger
- Soft grip handle for user comfort
- Dust blower provides a clear view over the cutting line
- Connectable to a dust collector without adapter



### Specifications

Capacity	Wood	65mm
	Mild steel plate	6mm
	Min. cutting radius	25mm
Input power	400W	
No load speed (strokes)	0 - 3,000 (min-1)	
Length of stroke	18mm	
Base tilt angle	45° left & right	
Weight	1.5kg	
Dimensions	197mm	
Standard accessories	Blade, splinter guard, chip cover and hex key	

## CJ90VST(H1Z) 90mm Jig Saw



- 4-mode orbital action to suit multiple cutting applications
- Variable speed by dial and trigger
- Dust blower provides a clear view over the cutting line
- Tool-less blade change



### Specifications

Capacity	Wood	90mm
	Mild steel plate	8mm
	Min. cutting radius	25mm
Input power	400W	
No load speed (strokes)	850 - 3,000 (min-1)	
Length of stroke	20mm	
Base tilt angle	45° left & right	
Weight	2.2kg	
Dimensions	228mm	
Standard accessories	Blade, hex bar wrench and carry case	



## CV350V(H1Z) Multi Tool



4966376294589



- Auto Mode automatically increases the oscillation speed to maximum when under load
- Tool-less change lever for quick and easy accessory change

- Soft start
- OIS (Oscillating Interface System)
- Constant speed controller

### Specifications

Input power	350W
No load speed	6,000 - 20,000 (min-1)
No load speed (AUTO mode)	15,000 (min-1)
Oscillation angle	3.2°
Accessory fitment system	OIS direct fit (12 position)

Weight	1.5kg
Length	280mm
Height	96mm
Standard accessories	28mm wood/metal blade, 85mm wood/metal blade, 93mm hook & loop sanding pad, 9 x sanding sheets, accessories storage case and tool/accessories carry case

### Flanges



Part No.	Type	For Model	Barcode
317465	Inner	C18DL / C18DSL	4966375285403
324563	Outer		4966375621188
338915	Inner	C18DBAL / C6MEY	4549115101388
338916	Outer		4549115101395
333666	Inner	C18DBL	4966375880448
333665	Outer		4966375880431
302444	Inner	C7YA	4966375176527
302423	Outer		4966375176329
321639	Inner	C7SB2 / C7UR	4966375317784
320953	Outer		4966375312604
322099	Inner	C6SS / C6MFA / C7MFA	4966375321415
323924	Outer		4966375602729
303365	Inner	C9SA2 / C9BA2	4966375182757
302423	Outer		4966375176329
370273	Inner	C9SA3	4549115127951
370279	Outer		4549115128019
330985	Inner	C7UY	4966375710516
330986	Outer		4966375710523

### Wrenches



Part No.	Type	For Model	Barcode
940543	Box Wrench 10mm	C18DL / C18DSL / C6MFA / C7MFA / C7UY / C6MEY	4966375127963
990666	Hex Bar 2.5mm	C18DBL / C18DBAL / C6MEY	4966375559900
944458	Hex Bar 4mm	C18DBL	4966375453895
944459	Hex Bar 5mm	C18DBAL	4966375453901
957683	Wrench 10mm & 13mm	C7SB / C7SB2 / C8 / C7YA	4966375477020
872422	Hex Bar 6mm	C7UR / C9SA2 / C9BA2 / C9SA3	4966375404033
944459	Hex Bar Wrench 5mm	C6SS	4966375453901

### Guides



Part No.	For Model	Barcode
302756	C6SS / C6MFA / C7MFA / C18DL / C18DBL / C18DBAL / C18DSL / C7UY / C6MEY	4966375178651
962175	C18DBAL	4966375485629
302691	C7SB / C7SB2 / C7YA / C7UR	4966375116448
303888	C9SA2 / C9BA2 / C9SA3	4966375186366

## Side Handles



Part No.	For Model	Barcode
303811	C9SA2 / C9BA2 / C9SA3	4966375185826
338934	C18DBAL	4549115101562

## Dust Extractor Adaptors



Part No.	For Model	Barcode
324580	C18DL / C18DSL	4966375621348
302981	C6SS / C6MFA / C7MFA	4966375180319
329063	C18DBL	4966375679929
329331	C18DBAL / C6MEY	4966375681694
302690	C7SB	4966375178170
324669	C9SA2 / C9BA2	4966375628361
319297	C7YA	4966375300076
372757	C7UR	4549115164963
997247	C7UY / C9SA3	4966375579076
337922	CV350V	4549115088436

## Circular Saw Dust Bag



Part No.	For Model	Barcode
319296	C7YA	4966375300069

## Vice Assembly



Part No.	For Model	Barcode
322952	C10FCE2 / C10FCH2	4966375328063
324378	C12LSH / C12RSH	4966375619185
329860	C8FSE / C8FSHE	4966375687351
321370	C10FSB / C10FSH	4966375316176
322957	C12LCH	4966375328100
339624	C12RSH2	4549115112711

## Mitre Saw Dust Bags



Part No.	For Model	Barcode
998845	C10FSB / C10FSH	4902530120110
322955	C8FSE / C8FSHE / C10FCE2 / C10FCH2 / C12LCH / C12LSH / C12RSH / C12RSH2	4966375328087


## Extension Guide Assembly



Part No.	For Model	Barcode
321553	C8FSE / C8FSHE / C10FSB / C10FSH	4966375317067
322956	C10FCE2 / C10FCH2	4966375328094
324369	C12LSH / C12RSH / C12RSH2	4966375621669

09

# Planing and Routing

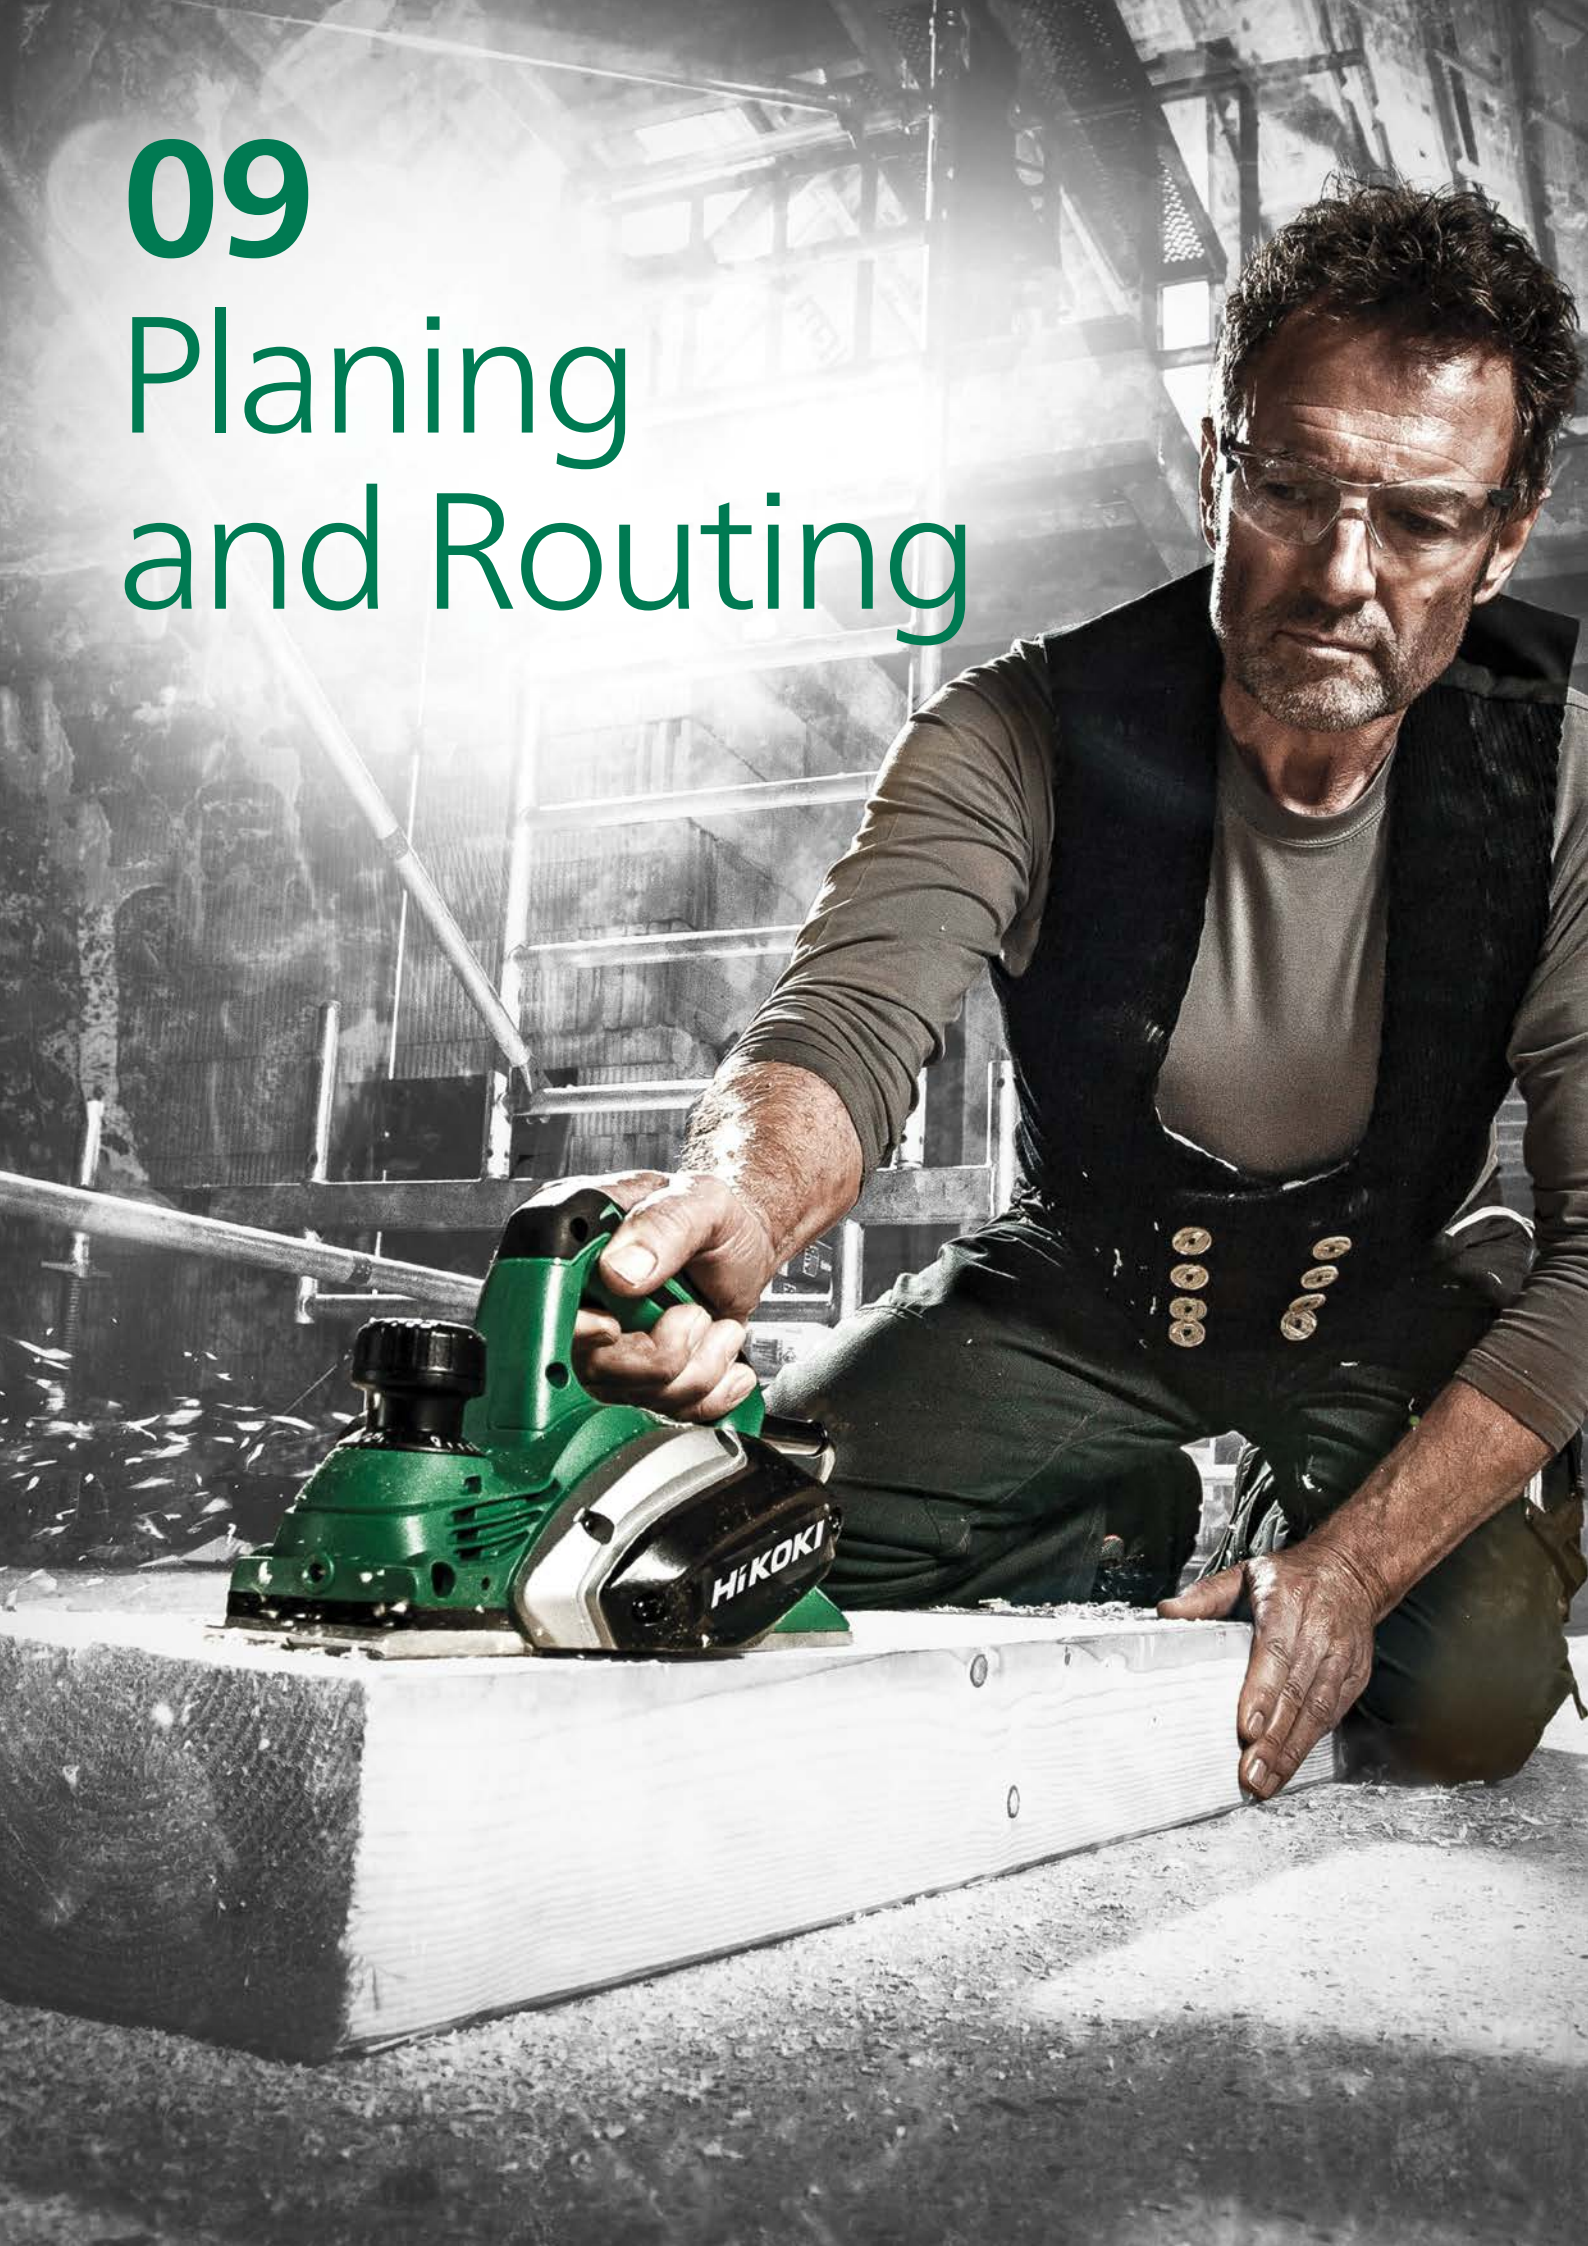

## P20ST(H1Z) 82mm Rebate Planer



4966376296248

- Lightweight and compact
- Maximum rebating depth of 9mm
- Able to be connected to dust extraction equipment



### Specifications

Input power	580W
No load speed	17,000 (min-1)
Blade type	82mm
Max. cutting width	82mm

Max. cutting depth	1.5mm
Weight	2.5kg
Length	296mm
Standard accessories	Blades, blade setting gauge, guide and wrench

## P20SF(H1Z) 82mm Rebate Planer



4966376295944

- Lightweight and compact
- Heavy-duty aluminium housing
- Maximum rebating depth of 9mm
- Able to be connected to dust extraction equipment
- Blade protection stand to protect the blade from catching when placing the tool down



### Specifications

Input power	620W
No load speed	17,000 (min-1)
Blade type	82mm
Max. cutting width	82mm
Max. cutting depth	2.6mm

Weight	2.5kg
Length	296mm
Standard accessories	Blades, blade setting gauge, guide, wrench and carry case

### Planer Blades



Length (mm)	Description	Part No.	Barcode
82	2 x reversible TCT blades	750470	8717472818812
82	10 x reversible TCT blades	750471	8717472818829
82	2 x HSS planer blades (for P20SB HSS model only)	750473	8717472818843
330	1 x HSS blade (22mm wide for P13F)	328395	9323624015917
330	1 x HSS blade (12mm narrow for P13F)	726341	9323624004386

## High Performance Power Tools.

Our brand name is new, but our company isn't. We've been developing innovative technologies for over 70 years. We are proud of our achievements and our contribution to the Australian woodworking industry.



Planing and Routing

### M12SE(H1Z) 12.7mm (1/2") Router



4966376294947

- Lightweight and compact
- Angle adjustable handles for improved handling
- Height adjustable cutting scale for increased accuracy

#### Specifications


Collet chuck	12.7mm (1/2")
Input power	1,700W
No load speed	22,000 (min-1)
Main body stroke	65mm
Weight	5.3kg
Standard accessories	Straight guide, template guide and wrench



The MultiVolt series.

**Increased  
power.  
Extended  
freedom.**



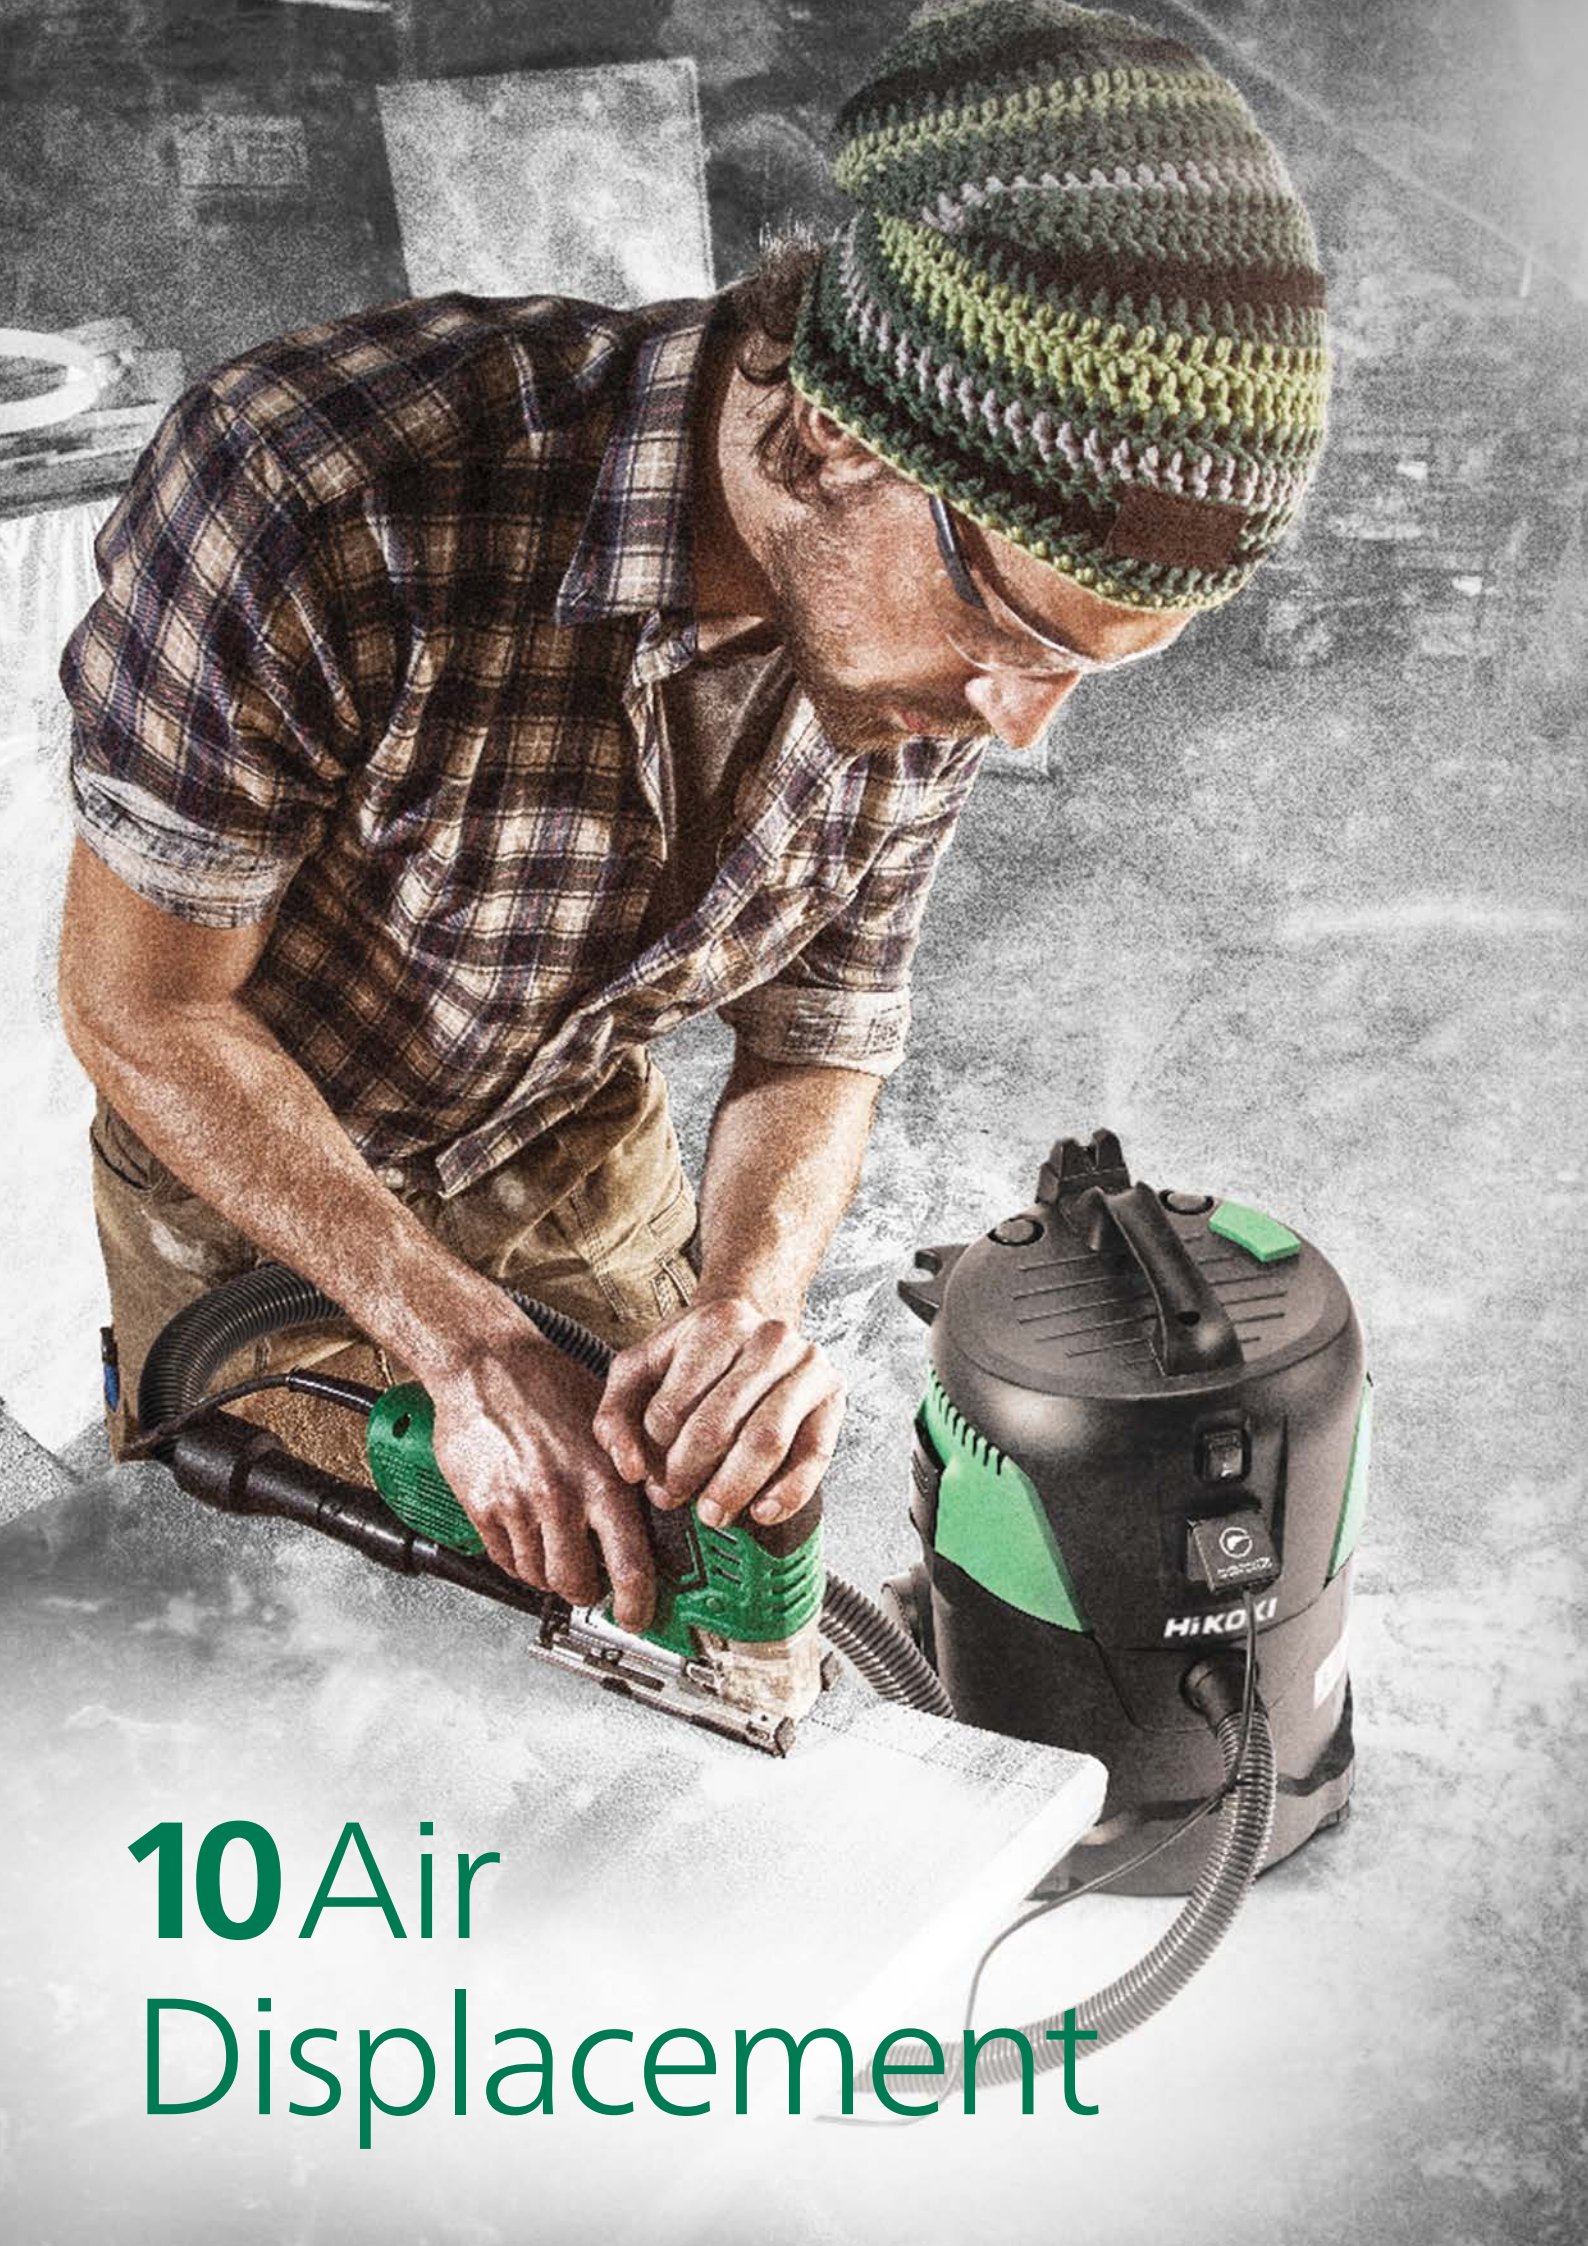

**10 Air**  
**Displacement**

## RH600T(H1Z) Heat Gun



- Two position switch controls high/low air volume and temperature controls
- Convenient quick cooling button delivers a shot of cool air for cooling down materials
- Built in thermal cut-out protects the tool from damage due to overheating



### Specifications

Input power	2,000W	
Air volume	Low	250 l/min
	High	500 l/min
Air temperature	Low	450°C
	High	600°C
Quick cooling button	Yes - 50°C	
Weight	0.57kg	
Dimensions	245 x 83 x 250mm	
Standard accessories	Round nozzle, flat nozzle, curved surface nozzle, glass protector nozzle, scraper with grip and carry case	

## RH650V(H1Z) Heat Gun with LCD Display



- Variable temperature and air flow buttons allow precise settings
- LCD display indicates temperature and air volume settings
- Built in thermal cut-out protects the tool from damage due to overheating



### Specifications

Input power	2,000W	
Air volume	Low	250 - 500l/min
	High	250 - 500l/min
Air temperature	Low	50°C
	High	50 - 650°C
LCD display	Yes	
Weight	0.79kg	
Dimensions	245 x 85 x 254mm	
Standard accessories	Round nozzle, flat nozzle, curved surface nozzle, glass protector nozzle, scraper with grip and carry case	



## RP250YDL(H1Z) 25L Wet & Dry Vacuum



4966376280940

- Auto power function allows the vacuum unit power to turn on and off when tool is in use
- Equipped with Class L filter capable of collecting over 99% of dust from 0.2 to 2- $\mu$ m
- PressClean system allows the filter surface to be cleaned at the press of a button to optimise suction
- Built in overload protection
- Includes both PE and fleece filters

### Specifications

Tank Capacity	25L	
Suction capacity	Solid	21L
	Liquid	18L
Input power	1,000W	
Auto outlet	1,400W	
Filtration rating	Class L	
Max. vacuum pressure	21kPa	
Max. air flow	3.6 (m <sup>3</sup> /min)	
Hose (ID x length)	32mm x 3.5m	
Weight	7.8kg	
Dimensions	374 x 392 x 550mm	
Standard accessories	3.5m suction hose, 2 x pipes, floor nozzle set, crevice nozzle, suction nozzle, round brush nozzle, adaptor, pipe holder, PE filter bag, fleece filter bag and hook	

COMING SOON



## RP300YDL(H1Z) 30L Wet & Dry Vacuum



4966376281039

- Stainless steel canister for increased durability
- Auto power function allows the vacuum unit power to turn on and off when tool is in use
- Equipped with Class L filter capable of collecting over 99% of dust from 0.2 to 2- $\mu$ m
- PressClean system allows the filter surface to be cleaned at the press of a button to optimise suction
- Built in overload protection
- Includes both PE and fleece filters

### Specifications

Tank Capacity	30L	
Suction capacity	Solid	26L
	Liquid	23L
Input power	1,000W	
Auto outlet	1,400W	
Filtration rating	Class L	
Max. vacuum pressure	21kPa	
Max. air flow	3.6 (m <sup>3</sup> /min)	
Hose (ID x length)	32mm x 3.5m	
Weight	9.2kg	
Dimensions	391 x 398 x 658mm	
Standard accessories	3.5m suction hose, 2 x pipes, floor nozzle set, crevice nozzle, suction nozzle, round brush nozzle, adaptor, pipe holder, PE filter bag, fleece filter bag and hook	

COMING SOON



Air Displacement

Dust Extractor  
Dust Bag (5 Pcs)

Hose 32mm I.D.  
Standard Accessory

Joint  
Optional Accessory

Dust Collection Adaptor  
Optional Accessory

Applicable  
Power Tool

RP250YDL



RP300YDL



Part No. 963558



Part No. 337527



Part No. 963558



Part No. 339729



Rotary hammers



Part No. 783121



Demolition hammers



Part No.  
783104



Disc grinders

Part No.  
783102,  
783103



Part No.  
328740



Part No. 339382



Orbital Sanders



Belt Sanders



Part No. 339380



Routers



Part No. 339381



Part No. 324669



Circular Saws



Coming Soon



Jig Saws



Part No.  
334502



Planers



Part No.  
317279



Part No. 339236



Orbital Sanders



Random  
Orbital  
Sanders

Part No. 339237



Slide Compound  
Mitre Saws



**COMING SOON**

# 11

# Outdoor Power Equipment



## AW130(H1Z) 1885psi High Pressure Washer



- Automatic start/stop reduces motor & pump wear
- Durable corrosion free metal pump
- Built in thermal protector stops the motor when abnormal heat is detected
- Siphon function can draw water from a bucket
- Handle & wheels for easy transportation & manoeuvrability



### Specifications

Max. pressure	1,885psi / 130bar
Flow rate	6L/min
High pressure hose length	10m
Permissible water temp.	40°C or less
Input power	1,600W
Power cord length	5m
Weight	8.3kg
Standard accessories	Trigger gun, high pressure hose (10m), variable nozzle spray lance, turbo nozzle spray lance, detergent bottle with nozzle, one touch hose connector joint, water feed connector, nozzle cleaning pin, cord holder, trigger gun holder and top handle

## AW150(H1Z) 2175psi High Pressure Washer



- Automatic start/stop reduces motor & pump wear
- Durable corrosion free metal pump
- Built in thermal protector stops the motor when abnormal heat is detected
- Siphon function can draw water from a bucket
- Integrated hose reel with winder
- Handle & wheels for easy transportation & manoeuvrability



### Specifications

Max. pressure	2,175psi / 150bar
Flow rate	6L/min
High pressure hose length	10m
Permissible water temp.	40°C or less
Input power	2,000W
Power cord length	5m
Weight	12.4kg
Standard accessories	Trigger gun, high pressure hose (10m), variable nozzle spray lance with pressure adjuster, turbo nozzle spray lance, on board detergent bottle, one touch hose connector joint, water feed connector, nozzle cleaning pin, trigger gun holder, hose winder handle and trigger gun support

## CH55Y(H1Z) 550mm Electric Hedge Trimmer



4966376297818

- Superior blade teeth create a cleaner cut and extend service life by 200%
- Safety clutch mechanism protects the blades and gears if debris or large branches stops the blades
- Mechanical Quick Blade Stop stops the blade within 0.05 seconds
- Additional switch located at the rear of the handle allows for trimming operation in high or hard to reach places



### Specifications

Input power	560W
Blade length	550mm
Max. cutting branch diameter	20mm

No load speed	1,550 (min-1)
Weight	4.1kg
Dimensions	970 x 205 x 225mm
Standard accessories	Blade cover

## RB27EAP(HDZ) Handheld Blower



4966376266661



COMING SOON

## CM75EBP(HAZ) 75cc 355mm Handheld Cutter



4966376300228







- Powerful PureFire™ 2 stroke engine produces low emissions & achieves 30% less fuel consumption
- Decompression valve provides effortless starting
- Cutting wheel water connector can be used with mains pressure or optional pressure tank (712630)
- Reduced vibrations



### Specifications

Engine displacement	75cc
Max. power	3.9kW
Fuel tank capacity	1100ml
Fuel mix	50:1
Cutting wheel diameter	355mm
Cutting wheel arbor	20/25.4mm
Max. cutting depth	125mm

Decompression button	Yes
Water connection	Yes
Sound pressure level	99.5dB(A)
Dry weight	10.6kg
Dimensions	630 x 225 x 420mm
Standard accessories	Abrasive cut off wheel, 25.4mm adaptor collar, combi box spanner, hex wrench and safety glasses

	Part No.	Description	For Model	Barcode
	335651	Wash Brush	AW100 / AW130 / AW150	4549115035584
	335652	Rotating Brush	AW100 / AW130 / AW150	4549115035591
	335657	10m High Pressure Extension Hose	AW100 / AW130 / AW150	4549115035621
	336412	Patio Cleaner	AW100 / AW130 / AW150	4549115057869
	336413	Rotary Angle Nozzle	AW100 / AW130 / AW150	4549115057876
	336414	Angle Nozzle 315 Degree	AW100 / AW130 / AW150	4549115057883

# 12 Accessories



### 102 Piece Drill and Driver Bit Set



Description	Product Code	Barcode
<p>Suitable accessories for metal, wood, plastic and masonry applications.</p> <p>Set includes:</p> <ul style="list-style-type: none"> <li>• Magnetic insert bit holder: 60mm length, 1/4 hex, zinc chrome plated steel</li> <li>• 12.7mm countersink: 1/4" hex</li> <li>• Drill bits: HSS black oxide: 1mm (5), 1.5mm (5), 2mm (4), 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 6mm</li> <li>• Masonry bits: carbide tip – 3mm, 4mm, 5mm, 6mm</li> <li>• 50mm insert bits: 1/4" hex – PH1, PH2, PH3, PZ 1, PZ 2, PZ 3, TX 20, TX 25</li> <li>• 25mm insert bits: 1/4" hex – PH0 (3), PH1 (4), PH2 (8), PH3 (4), PZ 1 (3), PZ 2 (5), PZ 3 (3), 3 slot (3), 4 slot (3), 5 slot (4), 6 slot (4), # 1 sq, # 2 sq, # 3 sq, TX 10 (2), T15 torx (2), TX 20 (2), TX 25 (2), TX 27 (2), TX 30 (2), TX 40 (2), 1.5 hex, 2 hex, 2.5 hex, 3 hex, 4 hex, 5 hex, 6 hex</li> <li>• Labelled accessory slots for convenient accessory location</li> <li>• Hard plastic case for safe and easy storage</li> </ul>	728492	9323624021901

### 41 Piece Impact Socket and Bit Set



Description	Product Code	Barcode
<p>Set includes:</p> <ul style="list-style-type: none"> <li>• PH1, PH2, PH3, PZ 1, PZ 2, PZ 3</li> <li>• T10, T15, T20, T25, T27, T30, T40</li> <li>• TX 10, TX 15, TX 20, TX 25, TX 27, TX 30, TX 40</li> <li>• 3 hex, 4 hex, 5 hex, 6 hex</li> <li>• Slotted 3, slotted 4, slotted 5, slotted 6</li> <li>• Quick change magnetic bit holder</li> <li>• 1/2" Drive (12.7mm) impact sockets 8, 10, 11, 12, 13, 14, 17, 19, 21, 22mm</li> <li>• Adapter hex 1/4" (6.35mm) to square 1/2" (12.7mm)</li> <li>• Adapter square internal 1/2" (12.7mm) to hex internal 1/4" (6.35mm)</li> <li>• 2 O-rings (one size fits all)</li> <li>• 2 Pins</li> <li>• Hard plastic case for safe and easy storage</li> </ul>	797500	9323624023936

### 5 Piece SDS Plus Drill Set



Description	Product Code	Barcode
<p>Set includes:</p> <ul style="list-style-type: none"> <li>• 5mm x 160mm</li> <li>• 6mm x 160mm</li> <li>• 8mm x 160mm</li> <li>• 10mm x 160mm</li> <li>• 12mm x 160mm</li> </ul>	782531	8717574047172



Description	Product Code	Barcode
<p>Set includes:</p> <ul style="list-style-type: none"> <li>• 1/4" hexagonal to 1/4" square</li> <li>• 1/4" hexagonal to 3/8" square</li> <li>• 1/4" hexagonal to 1/2" square</li> </ul>	751970	8717154655995




## Demolition Bits

### 30mm Hexagon with Collar



Description	Size (mm)	Product Code	Barcode
Bull Point	410	401036	4549115002043
Cold Chisel	35 x 410	401990	4549115045293



## Grinding & Cutting Accessories

### Super Thin Inox Wheels - Steel and Stainless Steel



Diameter (mm)	Thickness (mm)	Bore (mm)	Product Code	Barcode	Pack Qty
100	1	16	797089	9323624014101	25
125	1	22.2	797091	9323624014125	25

### Metal Cutting Wheels



Diameter (mm)	Thickness (mm)	Bore (mm)	Product Code	Barcode	Pack Qty
335	3	25.4	CW355	9377778040509	5

### Diamond Wheels



Description	Diameter (mm)	Bore (mm)	Segment Height (mm)	Product Code	Barcode
3 Pack Assorted	105	20 / 16	6 - 7	797130	9323624015092
3 Pack Assorted	125	22.2	7	797230	9323624028412
Universal Segmented	350	25.4	15	773007	4549115056336

### Easy Bevel for 125mm Grinder



Description	Product Code	Barcode	For Model
125mm Easy Bevel Kit	797006	9323624007196	G13SB3 / G13SE2 / G13YC2 / G13SW / G13SQ / G13VA
125mm Zec Disc to suit Easy Bevel	797019	9232624007295	

### Rubber Pads



Part No. (Pad)	Part No. (Nut)	Pad Size	Nut Thread	Barcode
936558Z	935513	100	M10 x 1.5	4966375446521
937825Z	937826Z	115	M14 x 2	4966375447269
953247Z	953246Z	180	M14 x 2	4966375468633

## Timber Saw Blades



Diameter (mm)	Bore (mm)	No. of Teeth	Product Code	Barcode	For Model
125	20	24	337942	4549115088757	C18DBL
125	20	40	402527	45499115076716	C18DBL
165	20	24	338935	4549115107373	C18DBAL / C18DSL
190	20	40	700002	4966375587880	C7MFA

## Timber Saw Blades - 10 pack



Diameter (mm)	Bore (mm)	No. of Teeth	Product Code	Barcode	For Model
185	20	24	401934	4549115036918	C7UR / C7MFA
235	25	20	401935	4549115036925	C9SA3

## Fibre Cement Blade



Diameter (mm)	Bore (mm)	No. of Teeth	Product Code	Barcode	For Model
185	20	4	797132	9377778040608	C7YA

## Jig Saw Blade Set



Description	Product Code	Barcode
10 piece set includes: • 2 x HCS Wood 100 x 8 TPI - J W20 • 2 x HCS Wood 100 x 6 TPI - J W40 • 1 x HCS Wood 76 x 18 TPI - J W10C • 2 x HCS Wood 100 x 10 TPI - J W10 • 1 x HCS Wood 100 x 10 TPI (reverse rake) - J W10R • 2 x HSS Metal 91 x 19 TPI - J M1	750049	8717154659177

## Reciprocating Saw Blade Set



Description	Product Code	Barcode
13 piece set includes: • 3 pcs. BIM - 6"/152mm x 6 TPI • 2 pcs. BIM - 6"/152mm x 18 TPI • 3 pcs. BIM - 8"/203mm x 14 TPI • 3 pcs. BIM - 9"/230mm x 6 TPI • 1 pc. BIM - 9"/230mm x 10 TPI • 1 pc. Storage Pouch	752049	8717574004557

## Planer Blades



Description	Length (mm)	Product Code	Barcode
2 x Reversible TCT Blades	82	750470	8717472818812
10 x Reversible TCT Blades	82	750471	8717472818829

## Site Bags



Description	Product Code	Barcode
Large Site Bag	402094	4549115048966
Premium Site Bag with Extension Handle & Wheels	402096	4549115048980

## Cordless | Majors Part List

MODEL	MOTOR	ARMATURE	MAGNET	SWITCH	BRUSHES
AW18DBL		337312	337310 Wiring Ass'y		
C18DBAL		361010 Rotor	340911 Wiring Ass'y	371907	
C18DBL		336547 Rotor	340872 Wiring Ass'y Inc Switch	332552	
C18DSL	324572			319825	
C3607DA		361087 Rotor	341002 Wiring Ass'y	371907	
CB18DBL		361012 Rotor	340922 Wiring Ass'y	371322	
CE18DSL		339998	328195	329057	999054
CF18DSL		361025	333796	333795	999100
CF18DSAL		361025	333796	333795	999100
CG18DSL	333506			332552	999016
CH18DSL	333323			333325	
CJ18DSL	328361			328335	
CN18DSL		339995	328195	329057	999054
CR18DBL		361062 Rotor	340968 Wiring Ass'y Inc Switch		
CR18DSL		360703	324468	319861	999068
CV18DBL		337398	337400 Wiring Ass'y		
DB3DL2	332755			333316	
DH18DBL		361035 Rotor	370954 Wiring Ass'y	370322	
DH18DBQL		361035 Rotor	370954 Wiring Ass'y	370322	
DH18DSL		360809	328482	328484	999100
DH36DPC		361072 Rotor	372867 Wiring Ass'y	370322	
DH36DAL		360801	323156	328058	999090
DH36DMA		361085 Rotor	341000 Wiring Ass'y	373096	
DN18DSL		360980	337433	337282	999054
DS18DBEL		336380 Rotor	335952 Wiring Ass'y		
DS18DBL		331710	340765	331715	
DS18DBL2		339763 Rotor	370832 Wiring Ass'y		
DS18DJL	337115			336630	
DS18DSL		360930	334442	333640	999054
DS18DSL2	332558			332822	
DS18DSL		360860	322520	329173	999054
DS36DA		361070 Rotor	373161 Wiring Ass'y Inc Switch		
DV18DBL		333528	340765	331715	
DV18DBL2		339763 Rotor	370832 Wiring Ass'y		
DV18DJL	332020			336630	
DV18DSL		360932	334442	333640	999054
DV18DSL2	332020			332822	
DV18DSL		360860	322520	329173	999054
DV36DA		361070 Rotor	373161 Wiring Ass'y Inc Switch	370151	
G18DBAL		36099 Rotor	339227 Wiring Ass'y Inc Switch	329057	
G18DBBAL		360991 Rotor	371691 Wiring Ass'y	371332	
G18DBL		360991 Rotor	337878 Wiring Ass'y	329057	
G18DSL		360804	328195	329057	999054
G3613DA		361075 Rotor	340986 wiring Ass'y		
G3613DB		361075 Rotor	340987 wiring Ass'y		
NR1890DBCL		361071 Rotor	372291 Wiring Ass'y	371019	
NT1850DBSL		361054 Rotor	370930 Wiring Ass'y		
NT1865DBAL		361054 Rotor	370932 Wiring Ass'y		
NT1865DBSL		361054 Rotor	370931 Wiring Ass'y		
P18DSL		360969	319846	319825	999017
R18DSAL	337805			333324	
R18DSL	331402			331393	

## Cordless | Major Parts List

MODEL	MOTOR	ARMATURE	MAGNET	SWITCH	BRUSHES
RB18DSL	328615			334699 Kit	
WF18DSL		360958	333735	332459	999054
WH18DBDL		332188 Rotor	332201 Wiring Ass'y Inc Switch	334903	
WH18DBDL2		361046 Rotor	370557 Wiring Ass'y Inc Switch	339217	
WH18DDL		335325 Rotor	337892 Wiring Ass'y Inc Switch	335523	
WH18DSDL		360947	334901	334956	999054
WH36DB		361046 Rotor	373024 Wiring Inc Switch	339217	
WR18DBDL		332188 Rotor	332203 Wiring Ass'y Inc Switch	334903	
WR18DBDL2		361055 Rotor	370942 Wiring Ass'y Inc Switch	339217	
WR18DSDL		360947	334901	334956	999054
WR18DSDL		360992	333796	333795	999100
WR36DA		361077 Rotor Inc Bearings	373029 Wiring Inc Switch	339217	
WR36DB		361077 Rotor Inc Bearings	373050 Wiring Inc Switch	339217	

### CORDLESS ACCESSORIES - MAJOR PARTS

MODEL	BULB	LENS	LAMP	LAMP COVER	LAMP CAP
UB10DL	330267	330608			
UB12D	314424	318540			
UB12DL			323339	323340	323519
UB18D	318767	318540			
UB18DAL	318767	318540			
UB18DL			323339	323340	323519
UB18DSL			323339	323340	323519

## AC | Major Parts List

MODEL	ARMATURE	FIELD	SWITCH	CARBON BRUSHES	CARBON BRUSHES AUTOSTOP
AW100	335543 Motor	335543 Motor	335554		
AW130	335592 Motor	335592 Motor	335554		
AW150	335648 Motor	335648 Motor	335554		
B16RM	326396 Motor	326396 Motor	726811		
C10FCE2(H1)	360695F	340687F	326700	999065	
C10FCH2(H1)	360695F	340687F	326700	999065	
C10FL	326432 Motor	326432 Motor	726355		
C10FSB	360898F	340779F	998868	999043	
C10FSH	360898F	340779F	998868	999043	
C12LCH	360710F	340625F	320950	999065	
C12LSH(H1)	360790C	340703F	324424	999065	
C12RSH(H1)	360790C	340703F	324424	999065	
C12RSH2(H1)	361021D	340925E	324424	999065	
C6MEY(H1)	361011 Rotor	340913B Wiring Ass'y	338900		
C6MFA	360694F	340614F	963756Z	999043	
C6SS	360883F	340614F	331259	999043	
C7MFA(H6)	360694F	340614F	963756Z	999043	
C7SB2(H6)	360577H	340528H	320969	999038	
C7UY	360882F	340762F	963756Z	999043	
C7YA(FCB)	360187F	340199F	302446	999038	
C8FSE(H1)	360839F	340729F	324424	999001	
C8FSHE(H1)	360839F	340729F	324424	999001	

MODEL	ARMATURE	FIELD	SWITCH	CARBON BRUSHES	CARBON BRUSHES AUTOSTOP
C9BA2(H1)	360778F	360661F	325357	999038	
C9SA2(H1)	360759F	340660R	325357	999038	
C9SA3(H6)	361033F	340942H	370260	999038	
CC14SF	360732F	340643H Until 08/11 340643F Since 09/11	976825	999044	
CC16SA	951875F	951909J	951864	999044	999082Z
CC16SB	977174 Motor 3PH	977174 Motor 3PH			
CE16SA	360622F	340567F	314603	999021	
CJ110MV	360741F Until 11/05 360764F Since 12/05	340545E Until 11/05 340666E Since 12/05	325085	999041	
CJ110VMA	306764F	340545E	955509	999041	
CJ160V(H1)	361014E	340915E	339021	999041	
CJ160VA(H1)	361014E	340915E	330698	999041	
CJ90VST(H1)	360893E	340774E	325085	999041	
CM12Y	360287F	340349F	307650	999044	
CN16SA	360622F	340567F	314603	999021	
CR13V	360616F	340563K	327130	999043	
CR13VA	360514F	340479K	320142	999043	
CR13VBY(H1)	360795F	340698F	320142	999043	
CS35SB(H1)	338818 Motor	N/A	338827	999104	
CS40SB(H1)	338818 Motor	N/A	338827	999104	
CV350V(H1)	360984F	360890F	335460	999005	
D10VC2	360596E	340547F	321632	999041	
D13	981657F	982797G	971667Z		999073
D13VB3	360652F	340587F	322854	999041	999072
D13VL(H6)	361003F	340906F	338756	999088	
D13VF	360543F	340504E	320195	999041	999072
D13VG	360543F	340504E	320195	999041	999072
D6SH	360439F	340391E	994734	999041	999072
DH22PG(H1)	360798F	340701F	331454	999041	999072
DH24PB3	360720F	340635F	331454	999041	999072
DH24PC2	360648F	340581F	322825	999088	999076
DH24PC3	360720F	340635F	331454	999041	999072
DH24PG(H1)	360962F	340866F	335796	999041	999072
DH26PC(H1)	360961F	340850F	335796	999041	999072
DH28PC(H1)	360857F	340739J	331677	999004	
DH28PCY(H1)	360961F	340850F	335796	999041	999072
DH30PC2	360768F	340672F	325675		999073
DH38MS(H1)	360875F	340753f	313093	999043	
DH40MC(H1)	361058F	340963F	371171	999043	999073
DH40MR	360591F	340542F	313093	999043	999073
DH40MRY(H1)	360591F	340680E	990941		999073
DH40MEY(H1)	337578	340885E	337587		
DH45MR	360737F	340646F	313093		999071
DH45MEY(H1)	337578 Rotor	340885E	337587		
DH50MRY	360819f	340712F	990941		999074
DH52MEY(H1)	360992	340899	337587		
DV13VSS(HA)	360864G	340743G	330716	999041	999072
DV16V	360626E	340573F	321632	999041	999072
DV16VSS(HA)	360863F	340742F	330716	999041	999072
DV18V	360655F	340589F	322854	999041	999072
DV20VB2(H8)	360781F	340587F	327061	999041	999072
DV20VB2-SC(H9)	360781F	340587F	327061	999041	999072
DV20VD(H1)	361003F	340906F	338756	999088	
DV22V(H6)	361002F	340905E	338756	999088	
FCJ65V3	360724F	340669F / 360724F	323086	999041	999072

MODEL	ARMATURE	FIELD	SWITCH	CARBON BRUSHES	CARBON BRUSHES AUTOSTOP
FDV16VB2	360207F	340222F	321632	999041	999072
FSV10SA	360681F	987044F	323324	999041	999072
G10SD2	360497F	340441F	321208	999088	999076
G10SN(H1)	360891G	340791J	314603	999005	
G10SQ(H1)	360891G	340771J	314603	999005	
G10SR3	360799E	340702F	314603	999005	
G10SR4	361016E	340016F	339149	999067	
G12SE2	360603F	340551F	311739	999088	999076
G12SR3	360799E	340702F	314603	999005	
G12SR4	361016E	340016E	339149	999067	
G13BY(H1)	372887	372890	372892	372939	
G13SB3	360734E	340645F	319319	999088	999076
G13SW(H6)	360970F	340870F	314603	999088	
G13SC2	360433F	340383F	313278	999043	
G13SE2	360603F	340551F	311739	999088	999076
G13SQ(H1)	360891G	340771J	314603	999005	
G13SR3	360799E	340702F	314603	999005	
G13SR4	361016E	340016E	339149	999067	
G13VA(H1)	360869E	340749E	314603	999088	999076
G13YC2	360869E	340823E	321099	999088	999076
G18SE3	360594F	340546F	320238	999061	999089
G18UBY(H1)	360777E	340682E	320235	999061	999089
G18UC(H1)	360594F	340846E	335122	999061	
G18UDY(H1)	360594F	340846E	370378	999061	
G23SE2	360594F	340546F	320238	999061	999089
G23SR	360762E	340664F	320238	999044	999074
G23SS(H1)	360852E	340737F	320239	999038	
G23ST(H1)	360982F	340888F	320238	999059	999093
G23UB2	360594F	340546F	320371	999061	999089
G23UBY	360594F	340682E	320371	999061	999089
G23UDY(H1)	360594F	340846E	370378	999061	
GP13	951003F	340435H	971824Z	999038	
GP2	985134F	985133F	980778	999021	999070
GP2S2(H1)	360879F	340758L	332805	999088	999076
GP3V(H1)	360911F	340827F	314603	999088	999076
GP5V(H1)	360914F	340829F	314603	999088	999076
H41MB	360903F	340788H	306143	999043	999073
H45MEY(H1)	337578	340885E	337587		
H45MR	360571F	340519F	306143		999073
H45MRY(H1)	360571E	340681E	306143		999073
H60MEY(H1)	360992	340899	337587		
H65SB2	360286F	340259H	306143		999086
H65SB3(H1)	361024F	340928F	337051	999086	
H90SB	360073F	340014F	981533Z		999086
H90SG(H1)	360974F	340876F	337051		999086
M12SA2	360750F	340668H	301821	999044	
M12SE(H1)	360888F	340668M	331812	999038	
M12V2	360748E	340659H	301821	999044	
M12VE(H1)	860886E	340659M	331812	999038	
M6SB	360428F	340374H	955509	999021	
M8SA2	360775F	340677F	314603	999043	
M8V2	360773E	340675F	314603	999043	
P13F	328164	328166	326429	326458	
P20SB(TCT)	958697F	958693H	963756Z	999021	
P20SF(H1)	360936F	340834F	334474	999021	

MODEL	ARMATURE	FIELD	SWITCH	CARBON BRUSHES	CARBON BRUSHES AUTOSTOP
P20ST	360942F	340834F	334474	999021	
RB40VA	360683F	340602J	323086	999021	
RP150YB(H1)	337472 Motor		338471		
RP350YE(H1)	337472 Motor		338471		
RP30Y	918M77A02B Motor	918M77A02B Motor	905306A000	905264AG02	
SAT-180	953297F	953231H	956632	999043	
SAY150A	980785F	980783H	980778	999021	
SB10V2(H1)	360797F	340700H	325085	999043	
SB8V2	360797F	340700H	325085	999043	
SP18VA	360576E	340526E	321449	999043	
SV12SD	360124F	340156F	971667Z	999041	999072
SV12SG	360637F	340578F	311948	999041	999072
SV12SH	360637F	340578F	311948	999041	999072
SV13YA(H1)	360696F	340616F	311948	999041	999072
SV13YB(H1)	360698F	340618F	311948	999041	999072
SV15YC(H1)	371861	371856	371854	371859	
VB16Y	360552F	340500F	319716	999043	
VTV16	981611F	981610H	318344		999073
W6VB3	360675F	340599E	323479		999091
W8VB2	360675F	340599E	323479		999091
WR16SA(H7)	360687F	340605F	985103	999021	
WR16SE(H1)	337203	340882	337202		
WR22SA	360700F	340620F	985103	999043	
WR22SE(H1)	360990	340897F	337202		
WR25SE(H1)	360989	340895F	337202		

MODEL	MOTOR	V-BELT	SWITCH
B16RM	326396	726520 / 726521	726811
C10FL	326432		326429
CC16SB	977174	964640	317841

# Conditions of Limited Warranty

## Selected HiKOKI Products

APPLICABLE TO PURCHASES MADE ON OR AFTER 1 OCTOBER 2018



\*6 year warranty on selected products with online registration. For details visit [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)

HiKoki Power Tools Australia Pty. Ltd. ('HiKOKI') warrants that selected products supplied by it and purchased by you from Authorised HiKOKI Dealers throughout Australia are free of defects and come with a limited warranty ('Warranty'). The selected HiKOKI products that come with a limited warranty are specifically set out in the Warranty Period and Selected Products table in this Warranty. For the avoidance of doubt, the selected HiKOKI product types that are set out in the 'Warranty Period and Selected Products' table include both the HiKOKI-branded and Hitachi-branded versions of those HiKOKI product types, provided that the products are purchased on or after 1 October 2018. All other HiKOKI products that are not listed in the Warranty Period and Selected Products table and other products listed under Warranty Exclusions are excluded from this express warranty.

### Warranty Claims

If you consider that any selected product listed in the Warranty Period and Selected Products table supplied by HiKOKI is defective, you can lodge a claim under this Warranty and any apparent fault will be rectified free of charge by HiKOKI or a HiKOKI Authorised Service Dealer within the applicable Warranty Period for that selected product, which is effective from the date of purchase provided that you meet the following conditions;

- You must produce the original invoice or other proof of purchase document disclosing the purchase date.
- All costs of installation, cartage, freight, travelling expenses, hiring tools and insurance are paid by the customer.
- The product, being precision equipment, has not been misused, adjusted or serviced by any person other than a HiKOKI Authorised Service Dealer.
- The equipment has been installed correctly and is used in accordance with the HiKOKI instructions supplied with the product.

HiKOKI offers this Warranty to you in addition to all other rights and remedies that you may have under law in relation to the selected products to which this Warranty relates.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Notwithstanding the proceeding clause, HiKOKI's liability in respect of a breach of a consumer guarantee or any warranty made under these Conditions of Limited Warranty for any of the selected products not of a kind ordinarily acquired for personal, domestic or household use is limited, to the extent permissible by law and at the option of HiKOKI to:

1. Replacing the products or the supply of equivalent products;
2. The repair of the products;
3. The payment of the cost of replacing the products or of acquiring equivalent products; or
4. The payment of the cost of having the products repaired.

To the extent permitted by law, all other warranties whether implied or otherwise, not set out in these Conditions of Limited Warranty are excluded and HiKOKI is not liable in contract, tort (including, without limitation, negligence or breach of statutory duty) or otherwise to compensate the customer for:

1. Any increased cost or expenses;
2. Any loss of profit, revenue, business, contracts or anticipated savings;

3. Any loss or expense resulting from a claim by a third party; or
4. Any special, indirect or consequential loss or damage of any nature whatsoever.

If you wish to make a claim under this Warranty, you should:

- Contact: ph (02) 8887 8100
- Visit your nearest HiKOKI Customer Service Provider;
- Visit the HiKOKI website for details:  
[www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)

These conditions of this Warranty may only be varied with the written approval of the directors of HiKOKI.

### Extended Warranty

If a product type in the 'Warranty Period and Selected Products' table has a period of time specified in the column titled 'Extended' applicable to it, then the Warranty Period for the relevant product type will be the period in the 'Extended' column only if:

- (a) the customer registers their contact information and information regarding their purchase of the relevant HiKOKI product/s on HiKOKI's website at [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au) within 4 weeks after the date on which they purchased the relevant HiKOKI product/s; and
  - (b) the customer has complied with all other terms and conditions of this Warranty.
- The period in the 'Standard' column is the applicable Warranty Period for a product type if:
- (c) no period of time appears in the 'Extended' column for a product type; and
  - (d) if a period of time appears in the 'Extended' column for product type but the conditions in (a) and (b) above are not satisfied.

### Warranty Period and Selected Products

Product Type	Warranty Period	
	Standard	Extended
AC Tools (Electric)	3 years	6 years
Cordless tools (Naked)	3 years	6 years
Ni-Cd & Ni-MH batteries	1 year	N/A
Li-ion batteries	3 years	N/A
Chargers	3 years	N/A
Pneumatic tools (Air)	3 years	6 years
Outdoor Power Equipment (Engine)	3 years	6 years
Accessories	1 year	N/A
Hand Tools	1 year	N/A
Any of the above products purchased for the purposes of Hire & Rental	6 months	N/A



## Warranty Exclusions

This section identifies what is excluded under this Warranty.

This Warranty DOES NOT cover damage caused by you or by anyone else:

- misusing, overloading or abusing the HIKOKI product,
- operating the product in a manner that is not in accordance with the HIKOKI instructions supplied with the product (the "Manual"),
- failing to clean the product in accordance with the instructions for correct and regular cleaning as set out in the Manual,
- not carrying out periodic maintenance,
- neglecting or otherwise failing to maintain the product in accordance with the instructions for maintenance of the product including regular tune-ups, lubrication, etc.
- using incorrect voltage or non-authorized electrical connections with the product,
- installing the product incorrectly,
- using non authorized/non-standard parts, non-genuine HIKOKI parts in connection with the product,
- repairing or carrying out any work on the product by someone other than an Authorised HIKOKI Service Dealer,
- causing a double burnout – field and armature burnout,
- operating the product with any guard, shield or line cutting knife removed, repositioned, or that is incomplete or damaged,
- using or operating the product with any evidence of partial failure of product or damage being present,
- tampering with the product in any way other than in accordance with the Manual,
- not having taken reasonable steps to prevent the damage or failure from occurring to the product,
- storing the product inconsistently with manufacturer's recommendations or where the product is exposed to corrosive substances such as fertilisers, grass and plant residue including palm tree sap, bore water and other detrimental environmental exposure,
- making mechanical adjustments that are inconsistent with the Manual- including, chains, bars, engine tuning etc...,
- operating the product with incorrect fuel to oil ratio,
- having made improper adjustments of ignition timing or the carburetor,
- using the product with clogged or removed filters (i.e. fuel filter, oil filter, air filter), or
- using incorrect chain and bar oil for the oil pump.

In addition to the above, this Warranty DOES NOT cover the following:

- Selected products purchased:
  - outside of Australia, NZ or South Pacific,
  - from a non-Authorised HIKOKI Dealer (such as purchases from unauthorised retailers and purchases over the internet, from local/international sellers or sites such as Ebay),
  - at an auction, or
  - from a private seller,

- Products not specifically set out in the Warranty Period and Selected Products table contained in this Warranty,
- Accidental damage or damage caused by an extra ordinary event or circumstance beyond your or anyone else's control including damage caused by:
  - environmental factors,
  - natural discolouration of material due to ultraviolet light,
  - crushing, impact with hard surface or damage caused in the transit of the product,
  - foreign material, or exposure of the product to excessive heat or cold or to solvents, or water entry into the product,
  - abnormal product performance caused by any ancillary equipment interference or other external factors,
- Damage or failure that occurs for a reason or reasons that were already disclosed to you (in writing or otherwise), prior to your purchase of the product,
- Damage or defects to the product that ought reasonably to have been revealed to you by an examination of the product, where you conducted such an examination before acquiring the product,
- Normal wear and tear due to the course of normal use,
- Freight costs associated with transporting the product between you, the place of purchase, the Authorised HIKOKI Dealer and HIKOKI for the purposes of making a claim pursuant to this Warranty or otherwise,
- Repairs that are required by you to be made to the product which are simply due to a clogged or restricted exhaust system, carbon deposits in exhaust ports, piston crown or combustion chamber or periodic decarbonising,
- Selected Products with serial number altered or removed,
- Refurbished, ex display or factory second selected products,
- Consumable items supplied with the product or that are a part of the product,
- Service parts,
- Accessories, that for the avoidance of doubt include but are not limited to the following: those included with the product at the time the product was purchased by you including cases & site bags, brushes, chucks, cord sets, bulbs, LED's & lamps, driver & drill bits, blades, driver blades, o-rings, switches & triggers, power tool attachments, blades and cutters, spark plugs, carburetor kits, filters, bars & chains, cutting equipment, recoil springs, rope and belts, measuring devices, air (pneumatic) fittings, nose caps, gaskets, fuel hoses, or
- The product coming into contact with sand, water, rust, corrosion, fire, vermin and insect infestation, power outages or surges or inadequate voltage or current.

If the selected product you are using has been rented or leased by you, and you consider a claim might be made under this Warranty, you should refer the matter to the rental or leasing company immediately and they will handle the matter.

This Warranty does not cover service costs in replacing and maintaining consumable parts and accessories that have ceased working through normal wear and tear such as, but not limited to: drill heads, blades, cutters and other parts classifiable as a consumable part or accessory.





**6** YEAR  
POWER TOOLS  
WARRANTY\*

## OUR BEST WARRANTY EVER. GUARANTEED.

Get your work done faster and easier, safe in the knowledge HiKOKI Power Tools are manufactured to exacting, world class standards. All backed by the peace of mind of our industry-leading **6 Year Warranty**. It's one more reason why you can have complete confidence in the tools you use, and the company who backs them. HiKOKI has over 70 years of power tool experience and an unmatched track record of innovation as Hitachi. Visit [hikokipowertools.com.au](http://hikokipowertools.com.au)

**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS

\*6 year warranty on selected products with online registration.  
For details visit [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)

# 70 years of experience and we're still learning.

Ever since 1948 our in-house design team and engineers have been driven by ambition for technological innovations. Every day we broaden our knowledge to improve power tools. Tools that will make every single job as easy and comfortable as possible.

# **HiKOKI**

## **HiKOKI Power Tools**

**HIKOKI POWER TOOLS AUSTRALIA PTY. LTD.**  
ABN 27 072 677 153

Unit 1, 10 Boden Road, Seven Hills NSW 2147

**Telephone:** (02) 8887 8100

**Follow us on our socials and never  
miss out on HiKOKI news**



**[hikokipowertools.com.au](http://hikokipowertools.com.au)**

**HITACHI**  
HITACHI POWER TOOLS



**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS

## **Koki Holdings Co., Ltd.**

Shinagawa Intercity Tower A, 20th floor 15-1,  
Konan 2-chome, Minato-ku, Tokyo 108-6020, Japan

**Tel.** +81-3-5783-0601

**Fax** +81-3-5783-0709

**[www.koki-holding.com](http://www.koki-holding.com)**