

EXCEPTIONAL PERFORMANCE

SERIOUS EXPERT SUPPORT


...RIGHT FROM THE BEGINNING

Builder of the industry's first self-propelled rotary mower in 1951, Snapper® has been the leader in making yard work easier. Today, Snapper offers one of the widest selections of power equipment for your yard or garden. Tractors, riding mowers and walk mowers feature easy operation, streamlined design and easy convertibility from side discharge to rear discharge to bagging or mulching. Like our satisfied owners say, it's as easy as it gets.

Your specialist Snapper® dealer will offer you the best advice and recommend the Snapper mower or tractor that offers the ultimate performance to suit your needs.

Supporting you every step of the way

- Expert advice
- Product instruction
- Product selection guidance
- Test drives
- Blade sharpening
- Servicing and parts
- Pick up and delivery
- Assembly and set up
- Seasonal maintenance
- Trade-ins

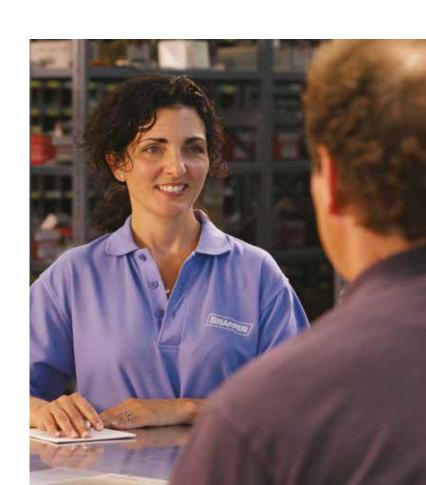

SNAPPER DURABILITY

THE SERIOUS CHOICE

XD BATTERY GARDEN TOOLS	04 - 05
NX SERIES LAWNMOWERS	06 - 09
CLASSIC & REX REAR ENGINE RIDERS	10 - 11
RPX REAR DISCHARGE TRACTORS	12 - 13
RXT REAR DISCHARGE TRACTOR	14 - 15
SPX™ SIDE DISCHARGE TRACTORS	16 - 17
ZTX ZERO TURNS	18 - 21
SPECIFICATIONS	22 - 26
ACCESSORIES	27



PEADYS



OUR TECHNOLOGIES EXPLAINED...

The **ReadyStart®** starting package eliminates the need to manually prime or choke the engine before starting. Briggs & Stratton guarantees on all its ReadyStart® equipped engines with the S2 Start Guarantee®. This starting guarantee offers peace of mind that the engine will start within two pulls every time. For complete details on the S2 Start Guarantee® see **www.briggsandstratton.com**



Anti Vibration System (AVS®) equipped engines feature a patented linear balancing system that eliminates side-to-side motion of traditional counter and rotating balance designs to provide a smooth ride and extend equipment life. This means up to an 80% reduction in engine vibration and less wear and tear on your engine, your equipment and you. Available on single cylinder large vertical shaft engines.



Electronic Fuel Management (EFM) is a system to simplify & optimize engine startup and provide the easiest starting system for ride engines.

XD BATTERY GARDEN TOOLS



One Battery, Multiple Tools.

The Snapper® XD 82-Volt Max^ Lawn and Garden System powered by Briggs & Stratton offers powerful, durable and reliable battery powered tools that deliver on performance. The complete system has four tools compatible with a 2 Ah or 4 Ah Briggs & Stratton® Lithium-Ion Battery***. Trim, saw, clip and blow through your yard work with ease.


4 Ah or 2 Ah Li-Ion Battery

- 82V Max^ Lithium-ion battery technology for consistent power.
- Four charging indicator lights display the level of charge.
- Charging time 2 Ah: 13 Minutes (50%), 30 Minutes (100%).
- Charging time 4 Ah: 25 Minutes (50%), 60 Minutes (100%).
- Charges with Briggs & Stratton® Rapid Charging Station.

BSB2AH82 (2 AH), BSB4AH82 (4AH)



POWERFUL. DEPENDABLE. ADVANCED PERFORMANCE

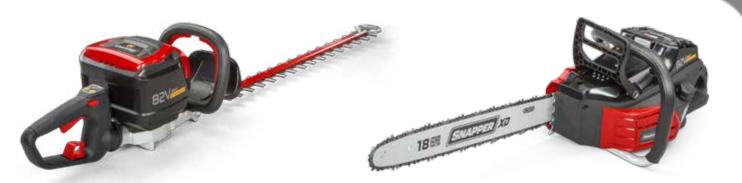

Hedge Trimmer

- 26"/66 cm high-quality steel blades.
- Up to 90 minutes* of run time (Fully charged 2 Ah battery).
- Innovative 180° rotating handle locks in increments of 45° for easy angled operation.
- Blade reverse helps remove jams effortlessly.
- · Cast metal tip for bump protection.
- Comfortable, ergonomic rubber handle and touch points.

SXDHT82

Also available as a kit: SXDHT82K (Hedge Trimmer, 2 Ah battery & charger)



Leaf Blower

- 210 km/h air speed; 15,6 m³/min air volume†.
- Up to 40 minutes* of run time (Fully charged 2 Ah battery).
- Infinite speed control maintains desired airflow at any speed.
- Stable, anti-tip base design.
- Metal tube bump/scrape protecting end ring.
- Comfortable, ergonomic rubber handle and touch points.

SXDBL82

Also available as a kit: SXDBL82K (Leaf Blower, 2 Ah battery & charger)

Chainsaw

- 18" Oregon[®] Chain with Micro Chisel Tooth.
 0.05" Gauge, 3/8" pitch. Steel, 18" Oregon[®] bar.
- Capable of 160+ cuts* (Fully charged 2 Ah battery***).
- Auto-oil system for chain lubrication (200 ml capacity).
- Onboard tension adjustment tool.
- Rugged metal handle with comfortable, ergonomic rubber grip and touchpoints.
- Base-mounted metal gripping teeth for maximum cutting leverage.

SXDCS82

Also available as a kit: SXDCS82K (Chainsaw, 2 Ah battery & charger)



- 16"/41 cm cutting diameter.
- Up to 25 minutes* of run time (Fully charged 2 Ah battery).
- Bump feed line advancement.
- Durable 1-inch aluminum shaft with cast metal connector.
- Push button multi-speed controls with indicator light.
- Comfortable, ergonomic rubber handle and touch points.

SXDST82

Also available as a kit: SXDST82K (String Trimmer, 2 Ah battery & charger)

Rapid Battery Charging Station EBSRC82

- Wall/surface mountable for space saving storage.
- Charges Briggs & Stratton® 82V Max² Ah and 4 Ah Lithium-ion batteries.
- Blue indicator lights display charging level diagnostics.




[^] Maximum initial battery voltage (measured without workload) is 82-volts. Nominal voltage is 72. * Run time and output capacity may be affected by conditions.

^{**} See operator's manual or dealer for complete warranty details; 2-year battery warranty valid for residential consumer use only. †Taken at handle output.

^{***} Chainsaw for use with 2Ah battery only.

NX SERIES LAWN MOWERS

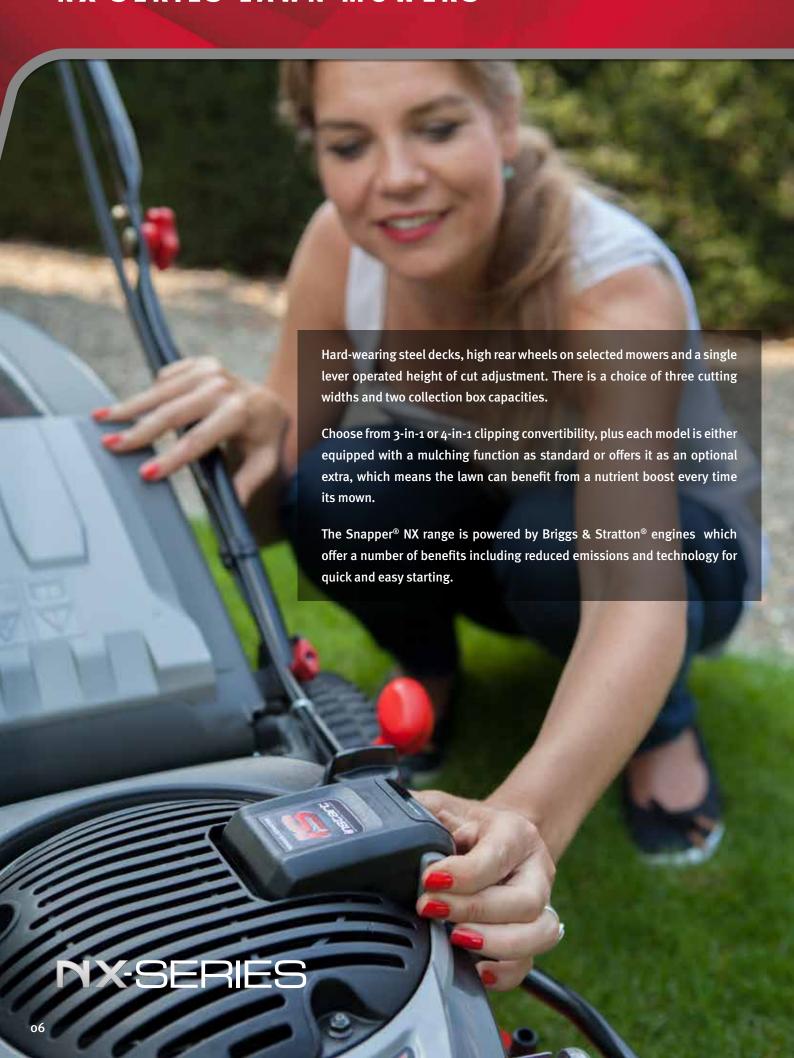

MOWING EXCELLENCE

Briggs & Stratton 450E SERIES™ OHV Recoil start Push

Bagging and rear discharge, mulching optional Cutting width: 42 cm Bag capacity: 60 litres

Briggs & Stratton 500E SERIES™ OHV Recoil start Push

Bagging and rear discharge, mulching optional

Cutting width: 46 cm Bag capacity: 60 litres



Briggs & Stratton 500E SERIES™ OHV Recoil Start Self propelled - single speed

Bagging and rear discharge, mulching optional

Cutting width: 42 cm Bag capacity: 60 litres

NX-80

NX-60



Briggs & Stratton 575EX SERIES™ OHV Recoil start, ReadyStart® Self propelled - single speed Bagging and rear discharge, Mulching optional Cutting width: 46 cm Bag capacity: 60 litres

NX-90

Briggs & Stratton 875EX SERIES™ Recoil start, ReadyStart® Self propelled - variable speed Hi-Speed transmission Forward speed: 2,8 - 5,5 km/h Bagging, mulching, side and rear discharge Cutting width: 53 cm Bag capacity: 70 litres







NX SERIES LAWNMOWERS



NX-905





Quick charger included



Centralized 6 position height-of-cut

MOWING EXCELLENCE





NX-100 NINJA® MULCHING

Briggs & Stratton 875EX SERIES™
Recoil start, ReadyStart®
Self propelled - variable speed
Forward speed: 1,9 - 6,4 km/h
Mulching and side discharge
Cutting width: 53 cm
Ninja® mulching blades



NX-200

Briggs & Stratton 850E SERIES™ I/C® OHV

Recoil start, ReadyStart®

Self propelled - single speed (3,6 km/h)

Bagging, mulching (mulchplug included) and rear discharge

Cutting width: 48 cm Bag capacity: 65 litres Front and rear ball bearings

Rear wheel drive

Cast aluminium Deck

NX-300

Briggs & Stratton 850E SERIES™ I/C® OHV

Recoil start, ReadyStart®

Self propelled - variable speed (2,8 - 4,5 km/h)

Bagging, mulching (mulchplug included) and rear discharge

Cutting width: 53 cm Bag capacity: 70 litres

Front and rear ball bearings

Rear wheel drive

Cast aluminium Deck



REAR ENGINE RIDERS

RETURN OF THE KING

The world famous Snapper "Classic" rider is back by popular demand. With it's low center of gravity and pivoting frame the Classic Rider adapts easily to your lawn contours.

Whether you want to side discharge your clippings or mulch, the Hi Vac® mower deck together with the included Ninja® mulching blade guarantees a perfect finish every time you mow your lawn.




REX, NEXT GENERATION RIDER


The small but perfectly formed Snapper REX rear engine rider is equipped with a durable single cylinder Briggs & Stratton engine featuring AVS® (Anti Vibration System). It has a tough steel frame chassis, a cast-iron front axle and a convenient eight litre fuel capacity.

The REX300 is equipped with a hydrostatic transmission drive system with foot controls. It also comes with a deluxe mesh seat and headlight as standard. The REX300 mower has a tight 51 cm turning radius so mowing around trees and other obstacles can be done with ease. There are six height-of-cut positions to choose from: 38 mm – 102 mm.

This rider has a manually engaged, one blade 84 cm Hi Vac® mower deck which can be converted from mulching to side discharge simply and quickly without tools. The REX300 rear engine rider, together with its famous Snapper Hi Vac® frame hung mower deck, is easy to use, comfortable to ride and offers exceptional performance and Snapper® durability.



Hi Vac® mowing deck



Ninja® mulching blade included (RER)



Variable speed disc drive transmission (RER)



Toolless changeover from mulching to side discharge



Step-through platform design (REX)

KING OF THE RIDERS



Model Illustrated: REX300

RER100 --- RER200 REX300

Briggs & Stratton Powerbuilt™ 3130 with AVS®

Mowing deck: 71 cm Hi Vac®

Variable speed disc drive transmission

Fuel capacity: 4,7 liter

Forward speed: 1,4 - 6,2 km/h

Reverse speed: o - 2,6 km/h

Tyres front/rear: 11" x 4" / 16" x 6,5"

Dimensions (LxWxH): 163 x 76 x 126 cm

Warranty: 3-year limited

Briggs & Stratton Powerbuilt™ 4175 with AVS®

Mowing deck: 84 cm Hi Vac®

Variable speed disc drive transmission

Fuel capacity: 4,7 liter

Forward speed: 1,4 - 6,2 km/h

Reverse speed: o - 2,6 km/h

Tyres front/rear: 11" x 4" / 16" x 6,5"

Dimensions (LxWxH): 165 x 89 x 109 cm

Warranty: 3-year limited

Briggs & Stratton Intek Series[™] 4195 with AVS[®]

Mowing deck: 84 cm Hi Vac®

Hydrostatic transmission

Fuel capacity: 8 liter

Forward speed: o - 6,8 km/h

Reverse speed: o - 2,7 km/h

Tyres front/rear: 13" x 5" / 16" x 6,5"

Dimensions (LxWxH): 168 x 94 x 122 cm

Warranty: 3-year limited

RPX REAR DISCHARGE MOWERS



ENGINEERED TO PERFECTION



RPX100

Briggs & Stratton Intek Series[™] 4195 with AVS®

Mowing deck: 96 cm Fuel capacity: 11 litres

Forward speed: o - 9,0 km/h Reverse speed: o - 4,5 km/h

Tyres front/rear: 15" x 6" / 20" x 8"

Warranty: 3-year limited

RPX200

Briggs & Stratton Intek Series[™] 7220 V-Twin

Mowing deck: 96 cm Fuel capacity: 11 litres

Forward speed: o - 9,0 km/h Reverse speed: o - 4,5 km/h

Tyres front/rear: 15" x 6" / 20" x 8"

Warranty: 3-year limited





The rigid steel mowing deck houses two redesigned blades that offer top notch collecting performance.



Ergonomically designed dash board with hour and fuel meter, cruise control



3,8 - 8,9 cm height-of-cut adjustable in 7 positions

RXT REAR DISCHARGE TRACTORS



CONTINUOUS INNOVATION



RXT300

Briggs & Stratton Professional Series[™] 8270 V-Twin

Mowing deck: 107 cm Fuel capacity: 11 litres

Forward speed: o - 9,0 km/h Reverse speed: o - 4,5 km/h

Tyres front/rear: 15" x 6" / 22" x 9,5"

Warranty: 3-year limited

The Professional Series™ 8270 V-Twin engine features full pressure lubrication, cartridge style air cleaner and a spin-on oil filter.







107 cm asymmetrical deck with redesigned blades



Mini Dash with hour meter, battery voltage and maintenance reminder



4,5 - 8,9 cm height-of-cut adjustable in 7 positions

SPX SIDE DISCHARGE TRACTORS



BUILT TO LAST



SPX100

Briggs & Stratton Intek Series™ 4195 with AVS®

107 cm stamped steel mower deck Fuel capacity: 13,2 litres Forward speed: 0 - 8,9 km/h Reverse speed: 0 - 5,3 km/h

Tyres front/rear: 15" x 6" / 20" x 8"

Warranty: 3-year limited

SPX200

Briggs & Stratton Intek[™] Series 7220 V-Twin

117 cm stampel steel mower deck

Fuel capacity: 13,2 litres Forward speed: 0 - 8,9 km/h

Reverse speed: o - 5,3 km/h

Tyres front/rear: 15" x 6" / 22 x 10"

Warranty: 3-year limited

SPX300

Briggs & Stratton Professional Series™ 8230 V-Twin

122 cm fabricated steel mower deck

Fuel capacity: 13,2 litres Forward speed: 0 - 8,9 km/h

Reverse speed: o - 5,3 km/h

Tyres front/rear: 15" x 6" / 22" x 9,5"

Warranty: 3-year limited



Durable pivoting cast-iron front axle



Ergonomically designed dash board



7 position height-of-cut

ZTX ZERO TURNS



WORK LESS PLAY MORE



ZTX110

Briggs & Stratton Intek[™] Series 7200 V-Twin

Hydro-Gear® EZT® transmissions

107 cm stamped steel mower deck

Height-of-Cut: 4,2 - 9,6 cm, 12 positions

Forward speed: o - 9,0 km/h

Reverse speed: o - 4,0 km/h

Tyres front/rear: 11 x 4" / 18 x 8.5"

Cargo bed optional

Warranty: 3-year limited

ZTX150

Briggs & Stratton Intek[™] Series 7220 V-Twin

Hydro-Gear® EZT® transmissions

117 cm stamped steel mower deck

Height-of-Cut: 3,8 - 11 cm, 13 positions

Forward speed: o - 9,0 km/h

Reverse speed: o - 4,0 km/h

Tyres front/rear: 11 x 4" / 18 x 8.5"

Cargo bed optional

Warranty: 3-year limited



12 / 13 Height-of-Cut positions



Easy access to deck maintenance points with removable floor plate



Ergonomic control panel

ZTX ZERO TURNS



WORK LESS PLAY MORE



ZTX200

Briggs & Stratton Professional Series™ 8240 V-Twin

Hydro-Gear® EZT® transmissions 107 cm fabricated steel mower deck

Reverse speed: o - 4,0 km/h
Tyres front/rear: 11 x 4" / 20 x 8"

Forward speed: o - 11,0 km/h

Cargo bed optional

Warranty: 3-year limited



13 Height-of-Cut positions

ZTX250

Briggs & Stratton Professional Series™ 8270 V-Twin

Hydro-Gear® EZT® transmissions 122 cm fabricated steel mower deck

Forward speed: o - 11,0 km/h Reverse speed: o - 4,0 km/h

Tyres front/rear: 11 x 4" / 20 x 8"

Cargo bed included
Warranty: 3-year limited



Easy access to deck maintenance points with removable floor plate

ZTX350

Briggs & Stratton Professional Series™ 8270 V-Twin

Hydro-Gear® ZT-2800® transmissions 132 cm fabricated steel mower deck

Forward speed: o - 12,0 km/h

Reverse speed: o - 4,0 km/h
Tyres front/rear: 11 x 4" / 20 x 10"

Cargo bed included

Warranty: 3-year limited



Steering lever tracking adjustment

EXCEPTIONAL PERFORMANCE

SPECIFICATIONS WALK BEHIND LAWN MOWERS

Model Name	NX-30	NX-40	NX-50	NX-60	NX-80
Power					
Engine Model	Briggs & Stratton 450E SERIES™ OHV	Briggs & Stratton 500E SERIES™ OHV	Briggs & Stratton 500E SERIES™ OHV	Briggs & Stratton 575EX SERIES™ OHV	Briggs & Stratton 750EX SERIES™ DOV®
Displacement	125CC	140CC	140CC	140CC	161CC
Starting System	Recoil	Recoil	Recoil	Recoil, ReadyStart®	Recoil, ReadyStart®
Deck					
Size (Cutting Width)	42 cm	42 cm	46cm	46 cm	46 cm
Deck Material	Steel	Steel	Steel	Steel	Steel
Height-of-Cut	1 point / 28 - 92 mm	1 point / 28 - 92 mm			
Blade Type	High Lift	High Lift	High Lift	High Lift	High Lift
Wheels					
Wheel Size (Front / Rear)	18 cm / 18 cm	18 cm / 20 cm	18 cm / 18 cm	18 cm / 28 cm	18 cm / 28 cm
(Holit / Real)					
Transmission					
Transmission Style	Push	Self Propelled	Push	Self Propelled	Self Propelled
Drive Type	-	Single Speed	-	Single Speed	Variable Speed
Forward Speeds	-	3,6 km/h	-	3,6 km/h	2,8 - 4,5 km/h
·		,		,	, ,,,,
Other Features					
Handle Type	Ergo, full fold	Ergo, full fold	Ergo, full fold	Ergo, full fold, foam	Ergo, full fold, foam
Bag Type	Soft textile	Soft textile	Soft textile	Soft textile with hard top	Soft textile with hard top
Bag Full Indicator	No	No	No	Yes	Yes
Bag Capacity	60 litres	60 litres	60 litres	60 litres	60 litres
Rear Discharge	Yes	Yes	Yes	Yes	Yes
Side Discharge	-		-		Yes
Mulching option	Optional	Optional	Optional	Optional	Included
Wash Port	-	-	-	Yes	Yes
Weight	25 kg	28 kg	26 kg	33 kg	37 kg
Warranty	2-Year Limited*	2-Year Limited*	2-Year Limited*	2-Year Limited*	2-Year Limited*

^{*} Applies to residential use only. See operator's manual for complete warranty details. Length of engine warranty coverage varies by manufacturer.

SNAPPER® DURABILITY

NX-90V	NX-905	NX-100	NX-200	NX-300	Model Name
					Power
Briggs & Stratton 875EX SERIES™ OHV	Briggs & Stratton 775IS SERIES™ DOV®	Briggs & Stratton 875EX SERIES™ OHV	Briggs & Stratton 850E SERIES™ I/C® OHV	Briggs & Stratton 850E SERIES™ I/C® OHV	Engine Model
190сс	161CC	190CC	190сс	190сс	Displacement
Recoil, ReadyStart®	InStart®, ReadyStart®	Recoil, ReadyStart®	Recoil, ReadyStart®	Recoil, ReadyStart®	Starting System
					Deck
53 cm	53 cm	53 cm	48 cm	53 cm	Size (Cutting Width)
Steel	Steel	Steel	Aluminium	Aluminium	Deck Material
1 point / 28 - 92 mm	1 point / 28 - 92 mm	4 point / 32 - 102 mm	1 point / 20 - 75 mm	1 point / 25 - 76 mm	Height-of-Cut
High Lift	High Lift	Ninja® mulching	Multi Purpose	Multi Purpose	Blade Type
					Wheels
20 cm / 28 cm	20 cm / 28 cm	20 cm / 25 cm	20 cm / 20 cm	20 cm / 23 cm	Wheel Size (Front / Rear)
					Transmission
Self Propelled	Self Propelled	Self Propelled	Self Propelled	Self Propelled	Transmission Style
Variable Speed	Variable Speed	Variable Speed	Single Speed	Variable Speed	Drive Type
2,8 - 5,5 km/h	2,8 - 4,5 km/h	1,9 - 6,4 km/h	3,6 km/h	2,8 - 4,5 km/h	Forward Speeds
Hi-Speed					
					Other Features
Ergo, full fold, foam	Ergo, full fold, foam	Ergo with foam grip	Ergo, full fold	Ergo, full fold	Handle Type
Soft textile with hard top	Soft textile with hard top	Optional	Soft textile	Soft textile	Bag Type
Yes	Yes	-	Yes	Yes	Bag Full Indicator
70 litres	70 litres	-	65 litres	70 litres	Bag Capacity
Yes	Yes	-	Yes	Yes	Rear Discharge
Yes	Yes	Yes	-	-	Side Discharge
Included	Included	Standard	Included	Included	Mulching option
Yes	Yes	-	-	-	Wash Port
38 kg	38 kg	43kg	42 kg	51 kg	Weight
2-Year Limited*	2-Year Limited*	2-Year Limited*	2-Year Limited*	2-Year Limited*	Warranty

EXCEPTIONAL PERFORMANCE

SPECIFICATIONS REAR ENGINE RIDERS, REAR AND SIDE DISCHARGE TRACTORS

Model Name	RER100 / RER200	REX300	RPX100	RPX200	RXT300
	Classic Rider	Rear Engine Rider	Rear Discharge	Rear Discharge	Rear Discharge
Power		0			
Engine Model	Briggs & Stratton Powerbuilt™ Series 3130 / 4175 OHV, AVS®	Briggs & Stratton Intek™ Series 4195 OHV, AVS®	Briggs & Stratton Intek™ Series 4195 OHV, AVS®	Briggs & Stratton Intek™ Series 7220 V-Twin OHV	Briggs & Stratton Professional Series™ 8270 V-Twin OHV
Cylinders	1	1	1	2	2
Starting System	Electric Start	Electric Start	Electric Start	Electric Start	Electric Start
Fuel Capacity	4,7 litres	8 litres	11 litres	11 litres	11 litres
Transmission					
Drive Type	Disc Drive	Hydrostatic	Hydro-Gear® 610	Hydro-Gear® 610	Hydro-Gear® 610
Forward Speed	1,4 - 6,2 km/h	o - 6,8 km/h	o - 9,0 km/h	o - 9,0 km/h	o - 9,0 km/h
Reverse Speed	o - 2,6 km/h	o - 2,7 km/h	o - 4,5 km/h	o - 4,5 km/h	o - 4,5 km/h
Chassis		,			
Frame	Steel	Steel	Steel	Steel	Steel
Tyres Front	11"X4"	13"X5"	15" x 6"	15"X6"	15" x 6"
Tyres Rear	16" x 6,5"	16" x 6,5"	20"X8"	20"X8"	22"x9,5"
Turning Radius	71 cm	51 cm	36 cm	36 cm	36 cm
Deck / Attachment Lift	Manual / -	Manual/-	Manual / -	Manual / -	Manual / -
Deck / Attachment Lift	Manual / -	Manual / -	Manual / -	Mailuat / =	Manual / -
Dimensions					
Length	163 / 165 cm	168 cm	256 cm	256 cm	256 cm
Width	76 / 89 cm	94 cm	103 cm	103 cm	112 cm
Height	126 cm	122 cm	120 cm	120 cm	120 cm
Wheel Base	114 / 117 cm	122 cm	131 cm	131 cm	131 cm
Weight	145 / 154 kg	183 kg	285 kg	288 kg	301 kg
Mower					
Cutting Width	71 / 84 cm	84 cm	96 cm	96 cm	107 cm
Mower Deck	Hi Vac® Frame Hung	Hi Vac® Frame Hung	Frame Hung	Frame Hung	Frame Hung
Collector Capacity	-	-	350 litres	350 litres	350 litres
Height-of-Cut Range	6 pos. / 38- 102 mm	6 pos. / 38 - 102 mm	7 positions / 38 - 89 mm	7 positions / 38 - 89 mm	7 positions / 45 - 89 mm
Blades	1 (Ninja® blade)	1	2	2	2
Other Features					
Mulching Kit	Mulch Cover Included	Mulch Cover Included	Included	Included	Included
Single Bag Collector	Optional	Optional	Included	Included	Included
Twin Bag Collector	-	Optional	-	-	-
Triple Bag Collector		-	-	-	-
Gauge Wheel Kit		-	Included	Included	Included
107 cm Dozer Blade		-	Optional	Optional	Optional
Snowthrower		-	Optional	Optional	Optional
Warranty	3-Year Limited*	3-Year Limited*	3-Year Limited*	3-Year Limited*	3-Year Limited*
·					

^{*} Applies to residential use only. See operator's manual for complete warranty details. Length of engine warranty coverage varies by manufacturer.

SNAPPER® DURABILITY

SPX100 Side Discharge	SPX200 Side Discharge	SPX300 Side Discharge	Model Name
Side Discharge	Side Discharge	Side Discharge	Power
Briggs & Stratton Intek™ Series 4175 OHV, AVS®	Briggs & Stratton Intek™ Series 7220 V-Twin OHV	Briggs & Stratton Professional Series™ 8230 V-Twin OHV	Engine Model
1	2	2	Cylinders
Electric Start	Electric Start	Electric Start	Starting System
13,2 litres	13,2 litres	13,2 litres	Fuel Capacity
			Transmission
Hydro-Gear® T2	Tuff Torq® K46	Tuff Torq® K46	Drive Type
o - 8,9 km/h	o - 8,9 km/h	o - 8,9 km/h	Forward Speed
o - 5,3 km/h	o - 5,3 km/h	o - 5,3 km/h	Reverse Speed
C: I	G: 1	Ct. 1	Chassis
Steel	Steel	Steel	Frame
15" x 6"	15" x 6"	15" x 6"	Tyres Front
20"x8"	22"X10"	22" X 9,5"	Tyres Rear
36 cm	36 cm	36 cm	Turning Radius
Manual / -	Manual / -	Manual/ -	Deck / Attachment Lift
			Dimensions
177 cm	179 cm	179 cm	Length
136 cm	150 cm	150 cm	Width
112 CM	114 cm	114 cm	Height
127 cm	127 cm	127 cm	Wheel Base
201 kg	228 kg	233 kg	Weight
			Mower
107 cm	117 cm	122 cm	Cutting Width
Frame Hung	Frame Hung	Frame Hung - Fabricated	Mower Deck
	- '.' / 0	- '.'	Collector Capacity
7 positions / 45 - 85 mm	7 positions / 38 - 92 mm	7 positions / 38 - 92 mm	Height-of-Cut Range
2	3	3	Blades
			Other Features
 Optional	Optional	Optional	Mulching Kit
- Optionat	- Optionat	- Optional	Single Bag Collector
- Optional			Twin Bag Collector
-	Optional	Optional	Triple Bag Collector
-	Included	Included	Gauge Wheel Kit
	Optional	Optional	107 cm Dozer Blade
	Optional	Optional	Snowthrower
3-Year Limited*	3-Year Limited*	3-Year Limited*	Warranty
J	<i>y</i>	<i>J</i>	,

EXCEPTIONAL PERFORMANCE

SPECIFICATIONS ZERO TURNS

Model Name	ZTX110	ZTX150	ZTX200	ZTX250	ZTX350
	Zero Turn	Zero Turn	Zero Turn	Zero Turn	Zero Turn
Power					
Engine Model	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton	Briggs & Stratton
	Intek [™] Series 7200 V-Twin	Intek [™] Series 7220 V-Twin	Professional Series [™] 8240 V-Twin	Professional Series [™] 8270 V-Twin	Professional Series™ 8270 V-Twin
	OHV	OHV	OHV	OHV	OHV
Cylinders	2	2	2	2	2
Starting System	Electric Start	Electric Start	Electric Start	Electric Start	Electric Start
Fuel Capacity	11 litres	11 litres	11 litres	11 litres	11 litres
Transmission					
Drive Type	Hydro-Gear® EZT®	Hydro-Gear® EZT®	Hydro-Gear® EZT®	Hydro-Gear® EZT®	Hydro-Gear® ZT-2800®
Forward Speed	o - 9,0 km/h	o - 9,0 km/h	o - 11,0 km/h	o - 11,0 km/h	o - 12,0 km/h
Reverse Speed	o - 4,0 km/h	o - 4,0 km/h	o - 4,0 km/h	o - 4,0 km/h	o - 4,0 km/h
Chassis					
Frame	Welded Steel	Welded Steel	Welded Steel	Welded Steel	Welded Steel
Tyres Front	11" X 4"	11" X 4"	11" X 4"	11" X 4"	11" X 4"
Tyres Rear	18" x 8,5"	18" x 8,5"	20" X 8"	20"X8"	20" X 10"
Turning Radius	o cm	o cm	o cm	o cm	o cm
Deck / Attachment Lift	Mechanical -	Mechanical -	Mechanical -	Mechanical -	Mechanical -
	foot operated	foot operated	foot operated	foot operated	foot operated
Dimensions					
Length	183 cm	183 cm	183 cm	183 cm	183 cm
Width	140 cm	150 cm	140 cm	150 cm	165 cm
Height	104 cm	104 cm	107 cm	107 cm	109 cm
Wheel Base	112 cm	112 CM	112 CM	112 cm	112 cm
Weight	258 kg	258 kg	238 kg	254 kg	294 kg
Mower					
Cutting Width	107 cm	117 cm	107 cm	122 CM	132 cm
Mower Deck	Frame Hung	Frame Hung	Frame Hung	Frame Hung	Frame Hung
Deck Construction	Stamped Steel	Stamped Steel	Fabricated Steel	Fabricated Steel	Fabricated Steel
Height-of-Cut Range Blades	12 positions 42 - 96 mm	13 positions 38 - 110 mm	13 positions 38 - 110 mm	13 positions 38 - 110 mm	13 positions 38 - 110 mm
Didues	2	3	2	3	3
Other Features					
Seat	Adjustable + armrests	Adjustable + armrests	Adjustable + armrests	Adjustable + armrests	Adjustable + armrests
Cargo Bed	Optional	Optional	Optional	Included	Included
Mulching Kit	Optional	Optional	Optional	Optional	Optional
Twin Bag Collector	Optional	Optional	Optional	Optional	Optional
Triple Bag Collector	-	-	-	-	-
Gauge Wheel Kit	Included	Included	Included	Included	Included
Warranty	3-Year Limited*	3-Year Limited*	3-Year Limited*	3-Year Limited*	3-Year Limited*

 $^{{}^{\}star} \text{Applies to residential use only. See operator's manual for complete warranty details. Length of engine warranty coverage varies by manufacturer.}$

SNAPPER® DURABILITY

ACCESSORIES



Mulch Plug
Convert your Rear Discharge
tractor to a mulching mower. Included with
2016 models.



Mulching Kit
Converts easily to a
mulching deck.



Ninja® Mulching Blade Improve your Rear Engine Rider's mulching performance to the max.



Single Bag Collector
Accessible collection drawer
with 175 litre capacity.



Twin Bag Collector Bag your clippings on a Side Discharge mower.



Triple Bag Collector
Bag your clippings on a
Side Discharge mower.



Snow Dozer Blade
Great for clearing paths
through snow.



Snowthrower
Great for clearing paths
through snow.



Tyre Chains
For use on slippery surfaces
like snow and ice.



Rhino Grip Set
Easily mount additional garden tools
on your zero turn.



82V Battery Harness
For use with our XD
battery tools.



Your independent Snapper® dealer has a full line of outdoor power equipment to suit every need. Snapper, a member of the Briggs & Stratton Power Products Group, manufactures a wide variety of outdoor power equipment, lawn and garden tractors and snow removal equipment for consumer use. Factory approved parts, accessories and maintenance items are available at authorised dealers.

BRIGGS & STRATTON NETHERLANDS BY
PO BOX 12 • 6040 AA ROERMOND • THE NETHERLANDS
TEL: +31(0) 475 408 383 FAX; +31(0) 475 408 384

www.snapper.eu
SnapperEurope