



HUSTLER[®]

**2017/18 AUSTRALIAN
CATALOGUE**



HUSTLER®

ENGINEERING PERFORMANCE™



CONTENTS

HISTORY of the Hustler brand	4
VX4® TECHNOLOGY	6
RAPTOR®	8
RAPTOR® SD	10
RAPTOR® FLIP-UP	12
FASTRAK®	14
FASTRAK® SDX	18
X-ONE®	20
SUPER Z®	22
SUPER Z® HYPERDRIVE	24
HUSTLER Z™ DIESEL	26
SUPER 104	28
COMPARISON TABLE	30

ICONS



HOME USER
Perfect for lawns under one acre



LAND OWNER
Perfect for lawns over one acre



PROFESSIONAL
Perfect for lawns from one to five acres

WHY HUSTLER IS A BETTER MOWER

SMOOTHTRAK™ TWIN-LEVER STEERING

It's what makes driving a Hustler a better experience. Our mowers have the smoothest and most precise steering in the industry. You'll glide around obstacles and make zero-radius turns with ease.



PATENTED PARK BRAKES

Simple, convenient and patented system that automatically engages when you open the steering levers.



HEAVY-DUTY FABRICATED STEEL DECK

We are the industry leader in manufacturing robust and solid decks. The heavy-duty welded steel deck provides maximum strength and durability.



ZERO TURN PRECISION

Zero-turn mowers are designed to cut so closely around obstacles that there's virtually no need to trim. These mowers pivot through 180 degrees without leaving any uncut grass.



LOWER CENTRE OF GRAVITY

A reduced profile translates into tighter handling and stability and greater ease in getting on and off the mower.

THE HUSTLER® STORY

FIRST WE CHANGED EVERYTHING

Hustler® Turf Equipment was born of a simple need for a riding mower that could manoeuvre the irregular landscape of the family home, complete with bird baths, gardens and winding front walkways. The first Hustler® mower was a compilation of mower parts and farm machinery, created by a genius named John Regier. Mr. Regier's mower cut grass and steered like no other. It could hug a flagpole or reverse directions at a fence line, with a turning radius of zero. With this, the world's first zero-turn mower was born.



“OUR MISSION IS TO PROVIDE THE MOST DEPENDABLE, USEFUL AND TIME-SAVING PRODUCTS IN TURF CARE.”



HISTORY IS MADE

When Mr. Regier brought his design to tractor cab manufacturer Excel™ Industries, the timing was perfect. He couldn't maintain the production demand on his own, and Excel™ was looking to expand its product line. When the folks at Excel™ saw the mower in action, they knew they had a product that would revolutionize the mowing industry. Under the direction of company president Roy Mullet, Excel™ began production of Hustler® mowers at its plant in Hesston, Kansas.

1961 Roy Mullet's vision and entrepreneurial spirit was a catalyst for the company. Later that same year, he was appointed the president by the Board of Directors.

Since then, Hustler® has become one of the leading turf care brands in the world. Across the globe, the Hustler® brand signifies innovation, quality and superior customer care.

In addition to manufacturing the best-in-class mowers, Hustler® is committed to providing a quality owner experience. Our mission is to provide the most dependable, useful, and time-saving products in turf care, while providing unmatched customer loyalty and the best warranty in the business.

Hustler's experienced dealers are always ready to answer questions and provide expert service to every customer. The growing Hustler® family now includes more than 1200 U.S. dealers and more than 40 distributors worldwide.

By continually evolving the Hustler® line, we have grown from humble beginnings to a leader in the industry. Our mowers undergo regular re-designs and improvements under the guidance of innovative Excel™ engineers, always living up to the highest Hustler® standards. With every mower our goal remains the same – to provide our customers with a dependable mower that will help them complete more work in less time.

**Innovation and quality.
That's how Hustler changed everything.**

VX4[®]

TECHNOLOGY

**ANOTHER
INNOVATIVE IDEA.
ANOTHER BEAUTIFUL
HUSTLER LAWN.**

HUSTLER DECK TECHNOLOGY IS A CUT ABOVE THE INDUSTRY

VERSATILITY

Adjustable front inner wall allows deck performance to be optimised for all grass conditions and seasons.

VELOCITY


The progressively larger tunnel in front of the blades, and a wider discharge opening, moves grass through the deck faster resulting in greater discharge dispersion.

VOLUME

Higher air and grass volume throughput results in less material carried in the cutting chambers. This allows for higher ground speed without compromising cut quality.

VACUUM

The grass is lifted more effectively. This results in a crisp, clean cut and appearance every time.

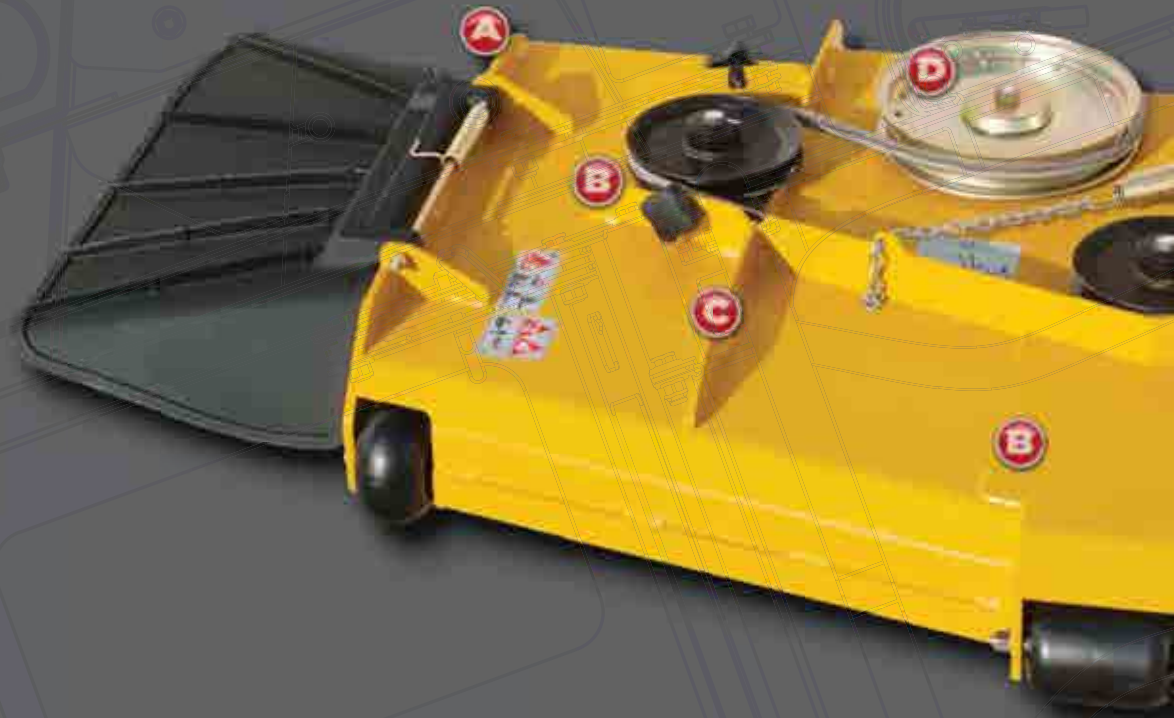

**THE SUPER Z, SUPER Z HD, HUSTLER Z DIESEL AND
X-ONE CONTAIN VX4[®] TECHNOLOGY**



Information is based on the 60" deck

- A .375" thick discharge plate braces the discharge opening from impact.
- B 7 gauge top doubles – (spindle reinforcement). 42" mount thickness.
- C .25" thick ribs provide continuous front-to-back bracing.
- D Increased idler and drive pulley diameters to accommodate higher horsepower engines.
- E 7 gauge outside wrappers (skirt).
- F 11 gauge bottom double ties spindle mounts together to resist spindle impacts.
- G .375" thick anti-scalp wheel mounts.
- H Front wall box section creates a side-to-side (lateral) beam that resists front impacts and keeps deck flat. Anti-scalp wheel pockets are heavily reinforced to protect anti-scalp wheels and deck.

- I Replaceable rubberised skid-pad.
- J Standard recessed anti-scalp wheels.
- K Adjustable inner-wall baffles.
- L Industrial ductile-iron spindle with 1.5" shaft diameter.
- M Larger discharge opening with high density rubberised discharge chute for greater discharge dispersion.
- N Optional anti-scalp wheels (not shown here).
- O Large tunnel in front of the blades increases discharge capacity.



RAPTOR®

Hustler's **Raptor**® is designed to the highest of standards and is poised to lead the zero-turn market in the entry level category, delivering the best-in-class overall value versus the competition.

SMOOTHTRAK™ STEERING
WITH PATENTED
AUTO PARK-BRAKE SYSTEM

MOULDED VINYL SEAT
WITH ARM RESTS

KAWASAKI FR
SERIES ENGINE

11.36 L FUEL CAPACITY

HAND OPERATED
DECK LIFT

HEAVY-DUTY
CASTER FORKS

18" DRIVE TYRES

HEAVY-DUTY FABRICATED
STEEL DECK

11" CASTER TYRES

ANTI-SCALP WHEELS



DOMESTIC WARRANTY

3
YEAR

NO
HOUR LIMIT

3RD YEAR PARTS ONLY

Images for illustrative purposes only. 52" deck model shown.

RAPTOR[®]

CUTTING WIDTHS

Side Discharge: 42" (1066 mm)
52" (1320 mm)

ENGINE

42": Kawasaki FR651, 21.5 hp, 726 cc
52": Kawasaki FR691, 23 hp, 726 cc
Electronic ignition, 12 volt starter and charging system.

FUEL

Unleaded
11.36 L capacity
Replaceable, automotive-type fuel filter.

TRACTION DRIVE SYSTEM

Dual hydrostatic. Hydro-Gear EZT integrated hydrostatic zero-turn transaxles. Transmission drive; V-belt drive from engine crankshaft.

BRAKES

Service: Hydrostatic dynamic braking.
Parking: Sprocket and cog. When steering levers are placed in neutral position, integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–10.46 kph/0–6.4 kph

DECK

11 ga, 3.0 mm welded steel with 14 ga, 1.98 mm double welded onto spindle mount areas.
Solid 19.05 mm x 6.4 mm steel bars reinforce impact areas on trim edges. Steel deck housing is 101.6 mm deep to provide room for high-capacity mowing.

CUTTING HEIGHT

Hand-operated deck height adjustment in 6 mm increments from 38.1 mm to 114.3 mm.

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.
42": 2 - 20.50" x 2.25" x .188
52": 3 - 17.86" x 2.25" x .188
Optional blades available

BLADE TIP SPEED

(at 3 200 RPM engine speed)
42": 16 700 fpm
52": 16 600 fpm

SPINDLES

Die cast aluminium housing, 19.3 mm diameter high carbon steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

42": 33 mm
52": 250 mm

WHEELS

Caster: 11 x 4.0 – 5, rib tread
Drive: 18 x 8.50 – 8, turf tread

SEAT

Moulded-vinyl seat, with fore and aft adjustment and arm rests.

DIMENSIONS

Height: 990 mm
Length: 1850 mm
42" Deck
Overall width: 1128 mm
with discharge chute up
Tyre-to-tyre width: 1040 mm
Weight: 229.06 kg
52" Deck
Overall width: 1358.9 mm
with discharge chute up
Tyre-to-tyre width: 1040 mm
Weight: 236.8 kg



Visit hustlermower.com.au
for more information and specifications.

ACCESSORIES

- Mulch Kit and 2 Bag Catcher
- Steering Extension Arms
- Hour Meter



▲ CONTROL PANEL

RAPTOR[®] SD

The Raptor[®] SD is a low profile, heavy-duty premium residential zero-turn with a deep fabricated steel deck, toughest front end with large 13" caster tyres, and exceptional control and handling.

The Raptor[®] SD also features an industry leading Kawasaki engine that provides unmatched power and reliability.

SMOOTHTRAK™ STEERING WITH
PATENTED AUTO
PARK-BRAKE SYSTEM

HIGH BACK SEAT
WITH ARM RESTS

KAWASAKI FR
SERIES ENGINE

11.36 L FUEL CAPACITY

EASY TO USE FOOT
OPERATED DECK LIFT

HEAVY-DUTY
CASTER FORKS
WITH INDUSTRIAL
BEARINGS

20" DRIVE
TYRES

13" CASTER TYRES

ANTI-SCALP
WHEELS

HEAVY-DUTY
FABRICATED
STEEL DECK



DOMESTIC WARRANTY

3
YEAR

300
HOUR LIMIT

COMMERCIAL WARRANTY

3
YEAR

300
HOUR LIMIT

Images for illustrative purposes only. 54" deck model shown.

RAPTOR[®] SD

CUTTING WIDTHS

Side Discharge: 36" (914.4 mm)
42" (1030 mm)
48" (1219 mm)
54" (1371 mm)

ENGINE

Kawasaki FR651, 21.5 hp, 726 cc 36" Deck
Kawasaki FR651, 21.5 hp, 726 cc, 42" Deck
Kawasaki FR691, 23 hp, 726 cc, 48" Deck
Kawasaki FR691, 23 hp, 726 cc, 54" Deck
Electronic ignition, 12 volt starter and charging system.

FUEL

Unleaded
11.36 L capacity
Replaceable, automotive-type fuel filter.

TRACTION DRIVE SYSTEM

Dual hydrostatic. Hydro-Gear ZT2800 integrated hydrostatic zero-turn transaxles. Transmission drive; V-belt drive from engine crankshaft.

BRAKES

Service: Hydrostatic dynamic braking.
Parking: Sprocket and cog. When steering levers are placed in neutral position, integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–12.1 kph/0–6.4 kph

DECK

11 ga, 3.0 mm welded steel with 7 ga, 4.5 mm double welded onto spindle mount areas. Solid 9.5 mm x 25.4 mm steel bars reinforce impact areas on trim edges. Steel deck housing is 114.3 mm deep to provide room for high-capacity mowing.

CUTTING HEIGHT

Foot-operated deck height adjustment in 6 mm increments from 38.1 mm to 114.3 mm.

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.
36": 2 - 17.86" x 2.50" x .20"
42": 2 - 20.50" x 2.50" x .20"
48": 3 - 16.50" x 2.50" x .20"
54": 3 - 18.50" x 2.50" x .20"

BLADE TIP SPEED

(at 3 200 RPM engine speed)
36": 18 400 fpm
42": 18 400 fpm
48": 18 600 fpm
54": 18 900 fpm

SPINDLES

Die cast aluminium housing 25.4 mm diameter high carbon steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

42": 28 mm
48": 90 mm
54": 90 mm

WHEELS

Caster: 36"/42", 48": 13 x 5 – 6, rib tread
54": 13 x 6.5 – 6, rib tread
Drive: 36": 20 x 6.5 – 10, turf tread
42", 48": 20 x 8.0 – 10, turf tread
54": 20" x 12 – 10, turf tread

SEAT

Moulded-vinyl seat, with fore and aft adjustment and arm rests.

DIMENSIONS

Height: 1066 mm
Length: 1850 mm
36" Deck
Overall width: 947.42 mm
with discharge chute up
Tyre-to-tyre width: 972.82 mm
Weight: 265.8 kg

42" Deck

Overall width: 1128 mm
with discharge chute up
Tyre-to-tyre width: 1040 mm
Weight: 269 kg

48" Deck

Overall width: 1244 mm
with discharge chute up
Tyre-to-tyre width: 1040 mm
Weight: 284.85 kg

54" Deck

Overall width: 1397 mm
with discharge chute up
Tyre-to-tyre width: 1168 mm
Weight: 294.83 kg



ACCESSORIES

- Mulch Kit and 2 Bag Catcher
- Steering Extension Arms
- Light Kit



Visit hustlermower.com.au
for more information and specifications.



RAPTOR[®] FLIP-UP

The **Raptor[®] FLIP-UP** features patent pending QuickFlip[™] technology. Enjoy effortless cleaning and blade changing, automated deck height adjustment and less required storage space all at the push of a button.

SMOOTHTRAK[™] STEERING WITH PATENTED AUTO PARK-BRAKE SYSTEM

HIGH BACK SEAT WITH ARM RESTS

9" CASTER TYRES

KAWASAKI FR SERIES ENGINE

11.4 L FUEL CAPACITY



QUICKFLIP[™] TECHNOLOGY
PUSH BUTTON TO ELECTRONICALLY RAISE AND LOWER DECK FOR EASY BLADE AND SERVICE ACCESS

DOMESTIC WARRANTY

4 YEAR

YEAR

400 HOUR LIMIT

COMMERCIAL WARRANTY

4 YEAR

YEAR

400 HOUR LIMIT

HEAVY-DUTY FABRICATED STEEL DECK

4 ANTI-SCALP WHEELS

20" DRIVE TYRES

Images for illustrative purposes only.

Goodbye Jacks & Dirty Backs!

RAPTOR[®]

FLIP-UP

CUTTING WIDTHS

Side Discharge: 48" (1219 mm)

ENGINE

Kawasaki FR691, 23 hp, 726 cc 48" Deck
Electronic ignition, 12 volt starter and charging system.

FUEL

Unleaded
11.4 L capacity
Replaceable, automotive-type fuel filter.

TRACTION DRIVE SYSTEM

Dual hydrostatic. Hydro-Gear ZT2800 integrated hydrostatic zero-turn transaxles. Transmission drive; V-belt drive from engine crankshaft.

BRAKES

Service: Hydrostatic dynamic braking.
Parking: Sprocket and cog. When steering levers are placed in neutral position, integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–12.1 kph/0–6.4 kph

DECK

11 ga, 3.0 mm fabricated steel with 7 ga, 4.5 mm double welded onto spindle mount areas.
Solid 9.5 mm x 25.4 mm steel bars reinforce impact areas on trim edges. Steel deck housing is 114.3 mm deep to provide room for high-capacity mowing.

CUTTING HEIGHT

Foot-operated deck height adjustment in 6 mm increments from 3.81 cm to 11.43 cm.

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.
48": 3 - 16.50" x 2.50" x .20"

BLADE TIP SPEED

(at 3 200 RPM engine speed)
48": 18 600 fpm

SPINDLES

Die cast aluminium housing, 25.4 mm diameter high carbon steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

48": 35 mm

WHEELS

Caster 9 x 3.5 Semi Pneumatic
Drive 20 x 8.0 – 10, turf tread

SEAT

Moulded-vinyl seat, with fore and aft adjustment and arm rests

DIMENSIONS

Height: 1084.6 mm
Length: 1876.7 mm
Overall width: 1244 mm with discharge chute up
Tyre-to-tyre width: 1110 mm
Weight: 340 kg



AUTOMATED DECK HEIGHT ADJUSTMENT

HEAVY-DUTY CASTER FORKS WITH INDUSTRIAL BEARINGS



ACCESSORIES

- Mulch Kit and 2 bag catcher
- Steering Lever Extension Kit
- Flex Forks Kit
- Light Kit




Visit hustlermower.com.au for more information and specifications.



FASTRAK®

The **FasTrak®** has all the strength, durability and power needed for the pro-sumer or commercial operator. As proof, we offer a remarkable 4 year limited residential and commercial warranty plus limited lifetime warranties on the frame and leading edge of the deck.



That's a serious mower.



FOLDING ROPS STANDARD

PREMIUM SEAT WITH ARMRESTS AND LUMBAR SUPPORT

SMOOTHTRAK™ STEERING WITH PATENTED AUTO PARK-BRAKE SYSTEM

KAWASAKI FR SERIES ENGINE

18.9 L FUEL CAPACITY

SIMPLE DECK HEIGHT ADJUSTMENT

FOOT OPERATED DECK LIFT

22" DRIVE TYRES

ONE OF THE TOUGHEST FRAMES, FRONT FORKS AND DECKS IN THE INDUSTRY

13" CASTER TYRES

ANTI-SCALP WHEELS

HEAVY-DUTY FABRICATED STEEL DECK

LIMITED LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK

Images for illustrative purposes only. 60" deck model shown.



DOMESTIC WARRANTY

4 YEAR

400 HOUR LIMIT

COMMERCIAL WARRANTY

4 YEAR

400 HOUR LIMIT

CUTTING WIDTHS

Side Discharge: 48": (1196 mm)
54": (1348 mm)
60": (1500 mm)

ENGINE

Kawasaki FR691, 23 hp, 726 cc, 48" Deck
Kawasaki FR691, 23 hp, 726 cc, 54" Deck
Kawasaki FR730, 24 hp, 726 cc, 60" Deck
Electronic ignition, 12 volt starter and charging system.

FUEL

Unleaded
18.9 L capacity
Replaceable, automotive-type fuel filter.

TRACTION DRIVE SYSTEM

Dual hydrostatic. Commercial-duty Hydro-Gear ZT 3100. Transmission drive; V-belt drive from engine crankshaft.

BRAKES

Service: Hydrostatic dynamic braking.
Parking: Internal transmission mechanical brake.
When steering levers are placed in neutral position, integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–12.9 kph/0–8 kph

DECK

10 ga, 3.4 mm welded steel with 11 ga, 3 mm doubler welded onto spindle mount areas. Solid 25.4 mm x 9.5 mm steel bars reinforce impact areas on trim edges. Commercial-style box-section reinforced front edge.

CUTTING HEIGHT

Foot-operated deck height adjustment in 6 mm increments from 38.1 mm to 114.3 mm.

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.
48": 3 - 16.5" x 2.5" x .20"
54": 3 - 18.5" x 2.5" x .20"
60": 3 - 20.5" x 2.5" x .20"

BLADE TIP SPEED

(at 3 200 RPM engine speed)
48": 18 600 fpm
54": 18 910 fpm
60": 18 410 fpm

SPINDLES

Aluminium casting with steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

48": 12.5 mm
54": 65 mm
60": 150 mm

WHEELS

Caster: 48": 13 x 5 – 6, smooth
54", 60": 13 x 6.5 – 6, smooth
Drive: 48": 22 x 9.5 – 10, turf tread
54", 60": 22 x 11 – 10, turf tread

SEAT

Moulded-vinyl seat with adjustable armrests and fore and aft sliding adjustment. Seat-pan suspension springs standard.

DIMENSIONS

Height: 1125.2 mm
Length: 1869.4 mm
48" Deck
Overall width: 1064.3 mm
with discharge chute up
Tyre-to-tyre width: 1193.8 mm
Weight: 378 kg

54" Deck

Overall width: 1399.5 mm
with discharge chute up
Tyre-to-tyre width: 1320.8 mm
Weight: 390 kg

60" Deck

Overall width: 1551.9 mm
with discharge chute up
Tyre-to-tyre width: 1320.8 mm
Weight: 401 kg



ACCESSORIES

- Mulch Kit and 2 Bag Catcher
- Flex Forks™
- Light Kit
- Steering Extension Kit



Visit hustlermower.com.au
for more information and specifications.

AT HUSTLER®, OUR STORY IS ONE OF GROWTH THROUGH INNOVATION.

We constantly strive to maintain a brand that signifies innovation and quality. By continually evolving the Hustler® line, we have grown from humble beginnings to a leader in the industry.

Our mowers undergo regular re-designs and improvements under the guidance of innovative Excel™ engineers, always living up to the highest Hustler standards. With every mower, our goal remains the same — to provide our customers with a dependable mower that will help them complete more work in less time.

Once we've designed a mower we love, we rigorously test every model, leaving nothing to chance. Our mowers meet expectations that are higher than industry standards. Hustler owners can rely on their mowers to be tough, fast, smooth and the most reliable on the market.




NEW

 **VISIT OUR
HUSTLER[®]
WEBSITE**

Browse through our comprehensive range of units with a click of a button.

Read through all unit specs, find special pricing and sales, compare units, submit your questions.

Keep up to date with the Hustler website.

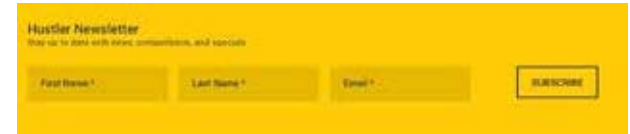

SIGN UP FOR OUR HUSTLER NEWSLETTER
Stay up to date with news, competitions, and specials




hustlermower.com.au

FASTRAK[®] SDX

The FasTrak[®] SDX is a true commercial grade mower, built for the pro-sumer or commercial operator who wants more of everything.

From zero-turning in tight spaces to covering straightaways at an industry-setting 14.5km/h. Most importantly, the FasTrak[®] SDX delivers a professional cut every time. The FasTrak[®] SDX has it all, and can do it all.



SMOOTHTRAK™ STEERING WITH PATENTED AUTO PARK-BRAKE SYSTEM

PREMIUM SEAT WITH ARMRESTS

ROPS STANDARD

KAWASAKI FX SERIES COMMERCIAL V-TWIN

18.9 L FUEL CAPACITY

SIMPLE DECK HEIGHT ADJUSTMENT

FOOT OPERATED DECK LIFT

22" DRIVE TYRES (48" DECK)
23" DRIVE TYRES (54" - 60" DECK)

ONE OF THE TOUGHEST FRAMES, FRONT FORKS AND DECKS IN THE INDUSTRY

ANTI-SCALP WHEELS

HEAVY-DUTY FABRICATED STEEL DECKS

13" CASTER TYRES

LIMITED LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK



DOMESTIC WARRANTY

4 YEAR

1000 HOUR LIMIT

COMMERCIAL WARRANTY

4 YEAR

1000 HOUR LIMIT

Images for illustrative purposes only. 60" deck model shown.

CUTTING WIDTHS

Side Discharge: 48": (1196 mm)
54": (1348 mm)
60": (1500 mm)

ENGINE

Kawasaki FX691, 22 hp, 726 cc, 48" deck
Kawasaki FX691, 22 hp, 726 cc, 54" deck
Kawasaki FX730, 23.5 hp, 726 cc, 60" deck
Electronic ignition, 12 volt starter and charging system.

FUEL

Unleaded
18.9 L capacity
Replaceable, automotive-type fuel filter.

TRACTION DRIVE SYSTEM

Dual hydrostatic Hydro-Gear ZT3400 commercial-duty pump/motor combination. Transmission drive; V-belt drive from engine crankshaft.

BRAKES

Service: Hydrostatic dynamic braking.
Parking: Internal transmission mechanical brake.
When steering levers are placed in neutral position, integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–14.5 kph/0–8 kph

DECK

10 ga, 3.5 mm welded steel with 11 ga, 3 mm double welded onto spindle mount areas. Solid 25.4 mm x 9.5 mm steel bars reinforce impact areas on trim edges. Commercial style box-section reinforced front edge.

CUTTING HEIGHT

Foot-operated deck height adjustment in 6mm increments from 38.1 mm to 114.3 mm.

MOWING BLADES

Heavy-duty, heat-treated, low-lift steel blades.
48": 3 - 16.5" x 2.5" x .20"
54": 3 - 18.5" x 2.5" x .20"
60": 3 - 20.5" x 2.5" x .20"

BLADE TIP SPEED

(at 3 200 RPM engine speed)
48": 18 600 fpm
54": 18 910 fpm
60": 18 410 fpm

SPINDLES

Aluminium casting with steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

48": 12.5 mm
54": 65 mm
60": 150 mm

WHEELS

Caster: 48": 13 x 5 – 6, smooth
54", 60": 13 x 6.5 – 6, smooth
Drive: 48": 22 x 9.5 – 10, turf tread
54", 60": 23 x 11 – 10, turf tread

SEAT

Moulded-vinyl seat with adjustable armrests and fore and aft sliding adjustment. Seat-pan suspension springs standard.

DIMENSIONS

Height: 1125.2 mm
Length: 1869.4 mm
48" Deck
Overall width: 1064.3 mm
with discharge chute up
Tyre-to-tyre width: 1193.8 mm
Weight: 378 kg

54" Deck

Overall width: 1399.5 mm
with discharge chute up
Tyre-to-tyre width: 1320.8 mm
Weight: 390 kg

60" Deck

Overall width: 1551.9 mm
with discharge chute up
Tyre-to-tyre width: 1320.8 mm
Weight: 401 kg



ACCESSORIES

- Mulch Kit and 2 Bag Catcher
- Flex Forks™
- Light Kit
- Steering Extension Kit
- Suspension Kit for Seat



Visit hustlermower.com.au
for more information and specifications.

X-ONE[®]

WITH
VX4[®]
TECHNOLOGY

We designed the X-ONE[®] mainframe with heavy-gauge rectangular tubing for strength. Then we narrowed the body, allowing the X-ONE[®] to carry three different deck sizes to meet any user's needs. With a top speed of 17.7 kph, the X-ONE[®] makes quick work of the largest jobs.



ROPS STANDARD

DELUXE SEAT WITH ARMRESTS

SMOOTHTRAK™ STEERING WITH PATENTED AUTO PARK-BRAKE SYSTEM

KAWASAKI FX SERIES COMMERCIAL V-TWIN

38.9 L FUEL CAPACITY

SIMPLE DECK HEIGHT ADJUSTMENT

FOOT OPERATED DECK LIFT

24" DRIVE TYRES

TOUGH FRAME, FRONT FORKS AND DECK

13" CASTER TYRES

ANTI-SCALP WHEELS

HEAVY-DUTY FABRICATED DECK

LIMITED LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK



DOMESTIC WARRANTY

5 YEAR

500 HOUR LIMIT

COMMERCIAL WARRANTY

2 YEAR

NO HOUR LIMIT

Images for illustrative purposes only. 60" deck model shown.

CUTTING WIDTHS

Side Discharge: 48": (1196 mm)
54": (1348 mm)
60": (1500 mm)

ENGINE

Kawasaki FX691, 22 hp, 726 cc, 48" deck
Kawasaki FX850, 27 hp, 852 cc, 54" deck
Kawasaki FX850, 27 hp, 852 cc, 60" deck
Electronic ignition, 12 volt starter and charging system.

FUEL

Unleaded
38.9 L capacity
Replaceable, automotive-type fuel filter

TRACTION DRIVE SYSTEM

Dual hydrostatic. Hydro-Gear PK 12cc pump and Parker TF0240 wheel motors. Hydrostatic system operates on 20W50 motor oil. Transmission drive; V-belt drive from engine crankshaft.

BRAKES

Service: Hydrostatic dynamic braking.
Parking: Automotive-style drum brakes. When steering levers are placed in park position, integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–17.7 kph/0–9.6 kph

DECK

10 ga welded steel. Solid 38 mm x 9.5 mm steel bars reinforce impact areas on trim edges. Commercial style, box section reinforced front edge. Reinforcements welded onto spindle mount areas.

CUTTING HEIGHT

Foot-operated deck height adjustment in 6 mm increments from 25.4 mm to 139.7 mm.

MOWING BLADES

Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Featuring an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.
48": 3 - 16.5" x 2.5" x .20"
54": 3 - 18.5" x 2.5" x .20"
60": 3 - 20.5" x 2.5" x .20"

BLADE TIP SPEED

(at 3 200 RPM engine speed)
48": 18 580 fpm
54": 18 340 fpm
60": 18 410 fpm

SPINDLES

Ductile iron casting with steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

48": 12.5 mm with 9.5" tyre = 19 mm
54": 65 mm with 9.5" tyre = 120.6 mm
60": 150 mm with 12" tyre = 146.0 mm

WHEELS

Caster: 13 x 6.5 – 6, rib tread
Drive: 48", 54": 24 x 9.5 – 12, turf tread
60": 24 x 12.0 – 12, turf tread

SEAT

Suspension Deluxe vinyl seat with sliding adjustment and armrests.

DIMENSIONS

Height: 1333.5 mm with ROPS folded/
1724.7 mm with ROPS up
Length: 2052.3 mm

48" Deck

Overall width: 1358.9 mm with discharge chute up
Tyre-to-tyre width: 1193.8 mm
Weight: 544 kg

54" Deck

Overall width: 1505 mm with discharge chute up
Tyre-to-tyre width: 1295.4 mm
Weight: 548 kg

60" Deck

Overall width: 1680 mm with discharge chute up
Tyre-to-tyre width: 1376 mm
Weight: 571 kg



▲ MULCH KIT AND 3 BAG CATCHER ATTACHMENT
(NOT INCLUDED)



Visit hustlermower.com.au
for more information and specifications.

ACCESSORIES

- Mulch Kit and 3 Bag Catcher
- Flex Forks™
- Light Kit
- Steering Extension Kit
- Suspension Kit for Seat

SUPER Z[®] VX4[®] TECHNOLOGY

High performance zero-turn with unsurpassed strength, reliability, speed, productivity and a warranty to match. The Super Z[®] defines what being a commercial mower is all about.



◀ FOLDING ROPS STANDARD

▼ GRAMMER SUSPENSION SEAT WITH OPERATOR ISOLATION

▼ SMOOTHTRAK™ STEERING WITH PATENTED AUTO PARK-BRAKE SYSTEM

◀ KAWASAKI FX SERIES COMMERCIAL V-TWIN

◀ 45.4 L FUEL CAPACITY

▼ SIMPLE DECK HEIGHT ADJUSTMENT

▶ FOOT OPERATED DECK LIFT

▶ TOUGH FRAME, FRONT FORKS & DECK

◀ 24" DRIVE TYRES

◀ HEAVY-DUTY FABRICATED DECK

▶ 13" CASTER TYRES

▲ ANTI-SCALP WHEELS

LIMITED LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK



DOMESTIC WARRANTY

5 YEAR

500 HOUR LIMIT

5 YEAR OR 3000 HOURS ON PUMPS & MOTORS

COMMERCIAL WARRANTY

3 YEAR

NO HOUR LIMIT

3RD YEAR PARTS ONLY

Images for illustrative purposes only. 60" deck model shown.

SUPER Z[®]

CUTTING WIDTHS

Side Discharge: 54": 1371.6 mm
60": 1524 mm
Rear Discharge: 60" 1524 mm

ENGINE

Kawasaki FX850, 27 hp, 852 cc, 54" Deck
Kawasaki FX850, 27 hp, 852 cc, 60" Deck
Kawasaki FX850, 27 hp, 852 cc, 60" RD Deck
Electronic ignition, 12 volt starter and charging system.

FUEL

Unleaded: 45.4 L capacity
Hydraulic Oil: 11.36 L capacity
Replaceable, automotive-type fuel filter.

TRACTION DRIVE SYSTEM

Dual hydrostatic. Hydro-Gear PY pumps and Parker TG310 wheel motors. Hydrostatic system operates on 15W50 Mobil 1 synthetic motor oil. Transmission drive (oil) cooler for increased system life.

BRAKES

Service: Hydrostatic dynamic braking.
Parking: Automotive-style drum brakes. When steering levers are placed in park position, integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–25.75 kph/0–12.01 kph

DECK

Welded steel 11 ga. + 11 ga. + 7 ga. 3mm x 3 mm x 4.6mm. Solid 38 mm x 9.5 mm steel bars reinforce impact areas on trim edges. Commercial-style box-section reinforced front edge. Reinforcements 11 ga. doubler + 7 ga. tripler 3mm x 4.6 mm steel welded onto spindle mount areas

CUTTING HEIGHT

Foot-operated deck height adjustment in 6 mm increments from 25.4 mm to 139.7 mm

MOWING BLADES

Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Featuring an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

54": 3 - 18.5" x 2.5" x 2.0" blade, extra high sail
60": 3 - 18.5" x 2.5" x 2.0" blade, extra high sail

BLADE TIP SPEED

(at 3 200 RPM engine speed)
54": 18 340 fpm
60": 18 630 fpm
Rear Discharge:
60": 18 630 fpm

SPINDLES

Ductile iron casting with steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

54": 25mm
60": 89mm

WHEELS

Caster: 13 x 6.50 – 6, rib tread, pneumatic
Drive: 26 x 12 – 12, turf tread

SEAT


Grammer bolstered suspension seat with armrests.

DIMENSIONS

Height: 1370 mm with ROPS folded down/
1816 mm with ROPS up.
Length: 2146 mm
54" Deck
Overall Width: 1524mm
with discharge chute up.
Width (tyre-to-tyre): 1447.8 mm
Weight: 685 kg

60" Deck

Overall Width: 1676 mm
with discharge chute up.
Width (tyre-to-tyre): 1447.8 mm
Weight: 685 kg



Visit hustlermower.com.au
for more information and specifications.

ACCESSORIES

- Mulch Kit
- Hydraulic Deck Lift
- Steering Extension Kit
- Light Kit
- Semi-Pneumatic Tyre
- Flex Forks



SUPER Z[®] HYPERDRIVE

WITH HYPERDRIVE HYDRO SYSTEM &

VX4
TECHNOLOGY

In a class of its' own; Super Z[®] Hyperdrive is built like a tank with welded steel decks and rides like a thoroughbred at a top speed of 25.75 km/h. The HyperDrive hydraulic system is engineered to run at higher PSI levels giving you better handling with industrial grade pumps and motors. Comfort for the professional is a high priority — Super Z[®] HD features a premium seat with suspension and lumbar adjustment, combined with semi-pneumatic tyres gives you the most comfortable ride on the best ZTR on the market.



DOMESTIC WARRANTY

5
YEAR

500
HOUR LIMIT

5 YEAR OR 3000 HOURS ON PUMPS & MOTORS

COMMERCIAL WARRANTY

3
YEAR

NO
HOUR LIMIT

3RD YEAR PARTS ONLY

TOUGH FRAME,
FRONT FORKS & DECK

FOOT OPERATED
DECK LIFT

SIMPLE DECK
HEIGHT ADJUSTMENT

SMOOTHTRAK™ STEERING
WITH PATENTED
AUTO PARK-BRAKE SYSTEM

GRAMMER SUSPENSION SEAT
WITH OPERATOR ISOLATION

FOLDING ROPS
STANDARD

KAWASAKI FX1000 OR
BRIGGS & STRATTON
VANGUARD V-TWIN
EFI ENGINE

45.4 L FUEL
CAPACITY

26" DRIVE
TYRES

HEAVY-DUTY
FABRICATED DECK

13" CASTER TYRES

ANTI-SCALP
WHEELS

LIMITED
LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK

Images for illustrative purposes only. 60" rear deck model shown.

HYPERDRIVE

CUTTING WIDTHS

Side Discharge: 60": 1505 mm
66": 1657 mm
72": 1809 mm

Rear Discharge: 60": 1505 mm

ENGINE

Kawasaki FX1000, 35 hp, 999 cc, 60" Deck
Kawasaki FX1000, 35 hp, 999 cc, 66" Deck
Kawasaki FX1000, 35 hp, 999 cc, 72" Deck
Kawasaki FX1000, 35 hp, 999 cc, 60" RD Deck
Briggs & Stratton Vanguard V-Twin EFI,
 37 hp, 993 cc, 60" Deck
Briggs & Stratton Vanguard V-Twin EFI,
 37 hp, 993 cc, 72" Deck
 Electronic ignition, 12 volt starter and
 charging system.

FUEL

Unleaded: 45.4 L capacity
 Hydraulic Oil: 11.36 L capacity
 Replaceable, automotive-type fuel filter.

TRACTION DRIVE SYSTEM

Dual hydrostatic. Parker TG280 wheel motors
 and Sauer Danfoss DDC-20 pumps. Hydrostatic
 system operates on 15W50 Mobil 1 synthetic
 motor oil. Transmission drive (oil) cooler for
 increased system life.

BRAKES

Service: Hydrostatic dynamic braking.
 Parking: Automotive-style drum brakes. When
 steering levers are placed in park position,
 integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–25.75 kph/0–12.07 kph

DECK

Welded steel. Solid 38 mm x 9.5 mm steel bars
 reinforce impact areas on trim edges. Commercial
 style, box section reinforced front edge.
 Reinforcements welded onto spindle mount areas.

CUTTING HEIGHT

Foot-operated deck height adjustment in 6 mm
 increments from 25.4 mm to 139.7 mm.

MOWING BLADES

Heavy-duty, heat-treated, high-lift steel Fusion™
 blades. With exclusive electro-fusion technology
 that creates an ultra-hard layer at the blade's
 cutting edge, the blade remains sharp and
 continues to give a clean cut far longer than any
 blade on the market.

60": 3 - 20.50" x 3.00" x .250" blade
 66": 3 - 22.50" x 3.00" x .250" blade
 72": 3 - 24.50" x 3.00" x .250" blade
 all extra high sail

BLADE TIP SPEED

(at 3 200 RPM engine speed)
 60": 18 630 fpm
 66": 18 230 fpm
 72": 18 530 fpm

SPINDLES

Ductile iron casting with steel shafts and sealed
 ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

60": 63.5 mm
 66": 101.6 mm
 72": 203.2 mm

WHEELS

Caster: 13 x 6.50 – 6, smooth tread,
 pneumatic
 Drive: 26 x 12 – 12, turf tread

SEAT

Grammer bolstered suspension seat with
 operator isolator platform and armrests.

DIMENSIONS

Height: 1370 mm
 with ROPS folded down/
 1816 mm with ROPS up.
 Length: 2146 mm
60" Deck
 Overall width: 1676 mm
 with discharge chute up
 Tyre-to-tyre width: 1447.8 mm
 Weight: 792 kg
66" Deck
 Overall width: 1828.8 mm
 with discharge chute up
 Tyre-to-tyre width: 1524 mm
 Weight: 805 kg
72" Deck
 Overall width: 1981.2 mm
 with discharge chute up
 Tyre-to-tyre width: 1524 mm
 Weight: 818 kg



Visit hustlermower.com.au
 for more information and specifications.

ACCESSORIES

- Mulch Kit and 3-Bag Catcher
- Steering Extension Kit
- Wavy Blades
- Gator™ Blades
- Light Kit
- Semi-Pneumatic Tyre
- Flex Forks





HUSTLER Z™ DIESEL

WITH

VX4[®] TECHNOLOGY

The power and precision of a Hustler, the stamina of a diesel. Boasting a top speed of 19.3 kph and Hustler's exclusive SmoothTrak™ steering, the **Hustler Z™ Diesel** works hard and fast, making it a great addition to any commercial fleet.



DOMESTIC WARRANTY

5
YEAR

500
HOUR LIMIT

COMMERCIAL WARRANTY

2
YEAR

NO
HOUR LIMIT



Images for illustrative purposes only. 60" deck model shown.

**LIMITED
LIFETIME WARRANTY**
FRAME & LEADING EDGE OF THE DECK

CUTTING WIDTHS

Side Discharge 54": 1352 mm
60": 1505 mm
72": 1830 mm

Rear Discharge 60": 1500 mm

ENGINE

Shibaura, 25 hp, 54" Deck

Shibaura, 25 hp, 60" Deck

Shibaura, 25 hp, 72" Deck

Shibaura, 25 hp, 60" Deck RD

Compression ignition, 12 volt starter and charging system and 40-amp alternator.

FUEL

Diesel: 54.5 L capacity

Hydraulic Oil: 6.6 L capacity

Engine Coolant: 5.7 L capacity

Replaceable, automotive-type fuel filter.

TRACTION DRIVE SYSTEM

Dual hydrostatic. Parker TG0335 Wheel Motors and Hydro-gear 21 cc Pump. Hydrostatic system operates on 15W50 Mobil 1 synthetic motor oil.

BRAKES

Service: Hydrostatic dynamic braking.

Parking: Automotive-style drum brakes. When steering levers are placed in park position, integral park brakes are automatically engaged.



MADE IN USA



Visit hustlermower.com.au

for more information and specifications.

GROUND SPEED (FORWARD/REVERSE)

0–19.3 kph/0–11.2 kph

DECK

11ga. + 11ga. + 7ga. Welded Steel. Solid 38 mm x 9.5 mm steel bars reinforce impact areas on trim edges. Reinforcements welded onto spindle mount areas. Steel deck housing is 14 mm deep to provide room for high-capacity mowing.

CUTTING HEIGHT

Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in 6mm increments from 25.5 mm – 140 mm.

MOWING BLADES

Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Featuring an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

54": 3 - 18.50"x 3.00"x.203" blade, extra high sail

60": 3 - 20.50"x 3.00"x.203" blade, extra high sail

72": 3 - 24.50"x 3.00"x.250" blade, extra high sail

BLADE TIP SPEED

Side Discharge 54": 18 322 fpm

60": 18 260 fpm

72": 18 890 fpm

Rear Discharge 60": 18 240 fpm

SPINDLES

Ductile iron casting with steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY (LEFT SIDE)

54": 25 mm

60": 89 mm

72": 227 mm

WHEELS

Caster: 13 x 6.50 – 6, rib tread,

Drive: 54": 24 x 9.5 – 12, turf tread

60", 72": 24 x 12 – 12, turf tread

SEAT

Grammer bolstered suspension seat with operator isolator platform and armrests.

DIMENSIONS

Height: 1300 mm with ROPS folded down\

1750 mm with ROPS up

Length: 2172 mm

54" Deck

Overall width: 1505 mm

with discharge chute up

Tyre-to-tyre width: 1400 mm

Weight: 746 kg

60" Deck

Overall width: 1676 mm

with discharge chute up

Tyre-to-tyre width: 1420 mm

Weight: 769 kg

72" Deck

Overall width: 1981 mm

with discharge chute up

Tyre-to-tyre width: 1420 mm

Weight: 798 kg

ACCESSORIES


- Mulch Kit
- Steering Extension Kit
- Light Kit
- Semi-Pneumatic Tyre
- Rear anti scalp
- Flex Forks

REAR GUARD ►





SUPER 104



WITH HYPERDRIVE HYDRO SYSTEM

The Super 104 is an affordable broad range mower with the manoeuvrability of a zero-turn that can mow up to 84 acres in 8 hours at 16 kph and will mow where most wide-area mowers cannot.



FOLDING ROPS STANDARD

GRAMMER SUSPENSION SEAT WITH OPERATOR ISOLATION

SMOOTHTRAK™ STEERING WITH PATENTED AUTO PARK-BRAKE SYSTEM

KAWASAKI FX SERIES COMMERCIAL ENGINE

54.5 L FUEL CAPACITY

SIMPLE DECK HEIGHT ADJUSTMENT

26" DRIVE TYRES

INTERNAL GUSSETS INSIDE FRAME FOR GREATER DURABILITY

HYDRAULIC POWERED DECK AND WING LIFT ALL CONTROLLED FROM THE DRIVERS SEAT

1.5" X 3.0" FRAME

15" CASTER TYRES

ANTI-SCALP WHEELS

LIMITED LIFETIME WARRANTY
FRAME & LEADING EDGE OF THE DECK



DOMESTIC WARRANTY

5 YEAR

500 HOUR LIMIT

COMMERCIAL WARRANTY

2 YEAR

NO HOUR LIMIT

Images for illustrative purposes only.

SUPER 104

CUTTING WIDTHS

Rear Discharge
104": 2635 mm

ENGINE

Kawasaki FX1000, 35 hp, 999 cc, 104" Deck
Electronic ignition, 12 volt starter and charging system.

FUEL

Unleaded: 45.4 L capacity
Hydraulic Oil: 11.36 L capacity
Replaceable, automotive-type fuel filter

TRACTION DRIVE SYSTEM

Dual hydrostatic. Parker TG0360 Wheel Motors and Sauer Danfoss DDC-20. Hydrostatic system operates on 15W50 Mobil 1 synthetic motor oil. Transmission drive (oil) cooler for increased system life.

BRAKES

Service: Hydrostatic dynamic braking.
Parking: Automotive-style drum brakes. When steering levers are placed in park position, integral park brakes are automatically engaged.

GROUND SPEED (FORWARD/REVERSE)

0–17.7 kph/0–12.07 kph

DECK

11 ga welded steel. 25.5 mm x 9.5 mm steel bars reinforce impact areas on trim edges. Gusset style, box section reinforces front edges. Reinforcements welded onto spindle mount areas.

CUTTING HEIGHT

Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in 6mm increments from 25.5 mm to 139.7 mm.

MOWING BLADES

4 Heavy-duty, heat-treated, high-lift steel Fusion™ blades. Featuring an exclusive electro-fusion technology that creates an ultra-hard layer at the blade's cutting edge, the blade remains sharp and continues to give a clean cut far longer than any blade on the market.

23.86" x 2.50" x .203" blade, CW cut
23.86" x 2.50" x .203" blade, CCW cut
20.50" x 2.50" x .203" blade, CW cut
20.50" x 2.50" x .203" blade, CW cut

BLADE TIP SPEED

15 800 fpm. Deck Drive Belt drive from engine with electric clutch to centre deck spindle. Belt drive from centre deck outer spindles to each wing. Spring tension idler and large pulleys to extend belt life.

SPINDLES

Ductile iron casting with steel shafts and sealed ball bearings.

DISCHARGE CHUTE

High density, rubberised.

TRIM CAPACITY

Left side: 55.88 cm
Right side: 55.88 cm

WHEELS

Caster: 15 x 6.0 – 6, rib tread, pneumatic,
Drive: 26 x 12 – 12, turf tread

SEAT

Grammer bolstered suspension seat with operator isolator platform and armrests.

DIMENSIONS


Height: 1370 mm with ROPS folded down/
1816 mm with ROPS up
Length: 2425.7
Overall width:
With wings down: 2695 mm
With wings up at gauge wheels: 2032 mm
With wings up at deck base: 1842 mm
Tyre-to-tyre width: 1532 mm
Weight: 1065.9 kg



Visit hustlermower.com.au
for more information and specifications.

ACCESSORIES

- Gator™ Blades
- Wavy Blades
- Mulch Kit
- Light Kit
- Steering Lever Extension Kit
- Semi-pneumatic Tyre

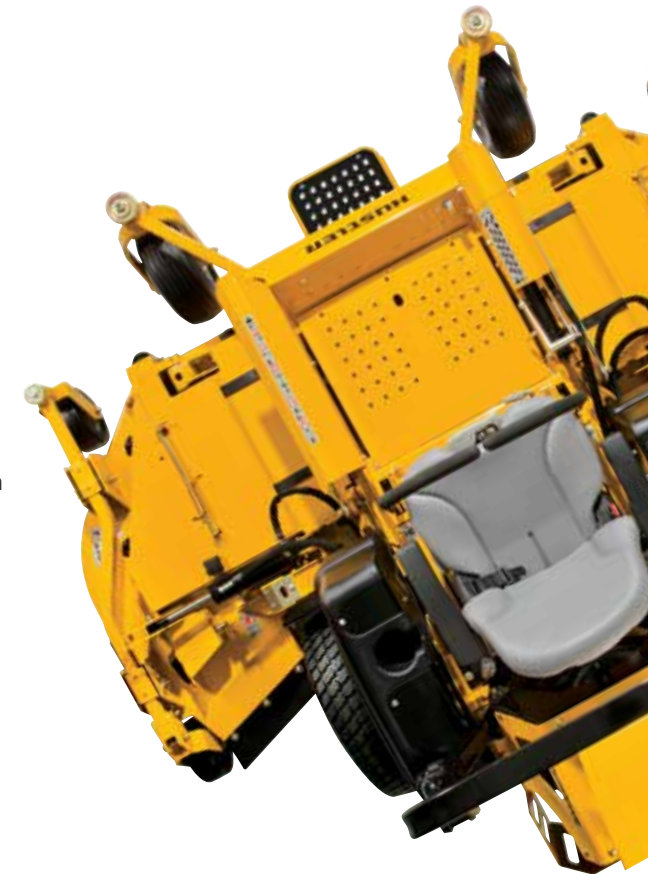

RESIDENTIAL

RAPTOR

RAPTOR SD

RAPTOR FLIP-UP

FASTRAK

FASTRAK SDX

X-ONE

MODEL	42"	52"	36"	42"	48"	54"	48"	48"	54"	60"	48"	54"	60"	48"	54"	60"
ENGINE	Kawasaki FR651 Kawasaki FR691		Kawasaki FR651		Kawasaki FR691		Kawasaki FR651	Kawasaki FR691	Kawasaki FR691	Kawasaki FR730	Kawasaki FX691	Kawasaki FX691	Kawasaki FX730	Kawasaki FX691	Kawasaki FX850	Kawasaki FX850
HORSE POWER (hp)	21.5	23	21.5	21.5	23	23	23	23	23	24	22	22	23.5	22	27	27
DISPLACEMENT (cc)	726	726	726	726	726	726	726	726	726	726	726	726	726	726	852	852
STARTER	12 Volt		12 Volt		12 Volt		12 Volt	12 Volt		12 Volt		12 Volt		12 Volt		
FUEL TYPE	Unleaded		Unleaded		Unleaded		Unleaded	Unleaded		Unleaded		Unleaded		Unleaded		
DRIVE SYSTEM	Dual Hydrostatic		Dual Hydrostatic		Dual Hydrostatic		Dual Hydrostatic	Dual Hydrostatic		Dual Hydrostatic		Dual Hydrostatic		Dual Hydrostatic		
TRANSMISSION	Hydro-gear EZT		Hydro-gear ZT2800		Hydro-gear ZT2800		Hydro-gear EZT	Hydro-gear ZT3100		Hydro-gear ZT3100		Hydro-gear ZT3400		Parker TF0240 Motor & Hydro-gear PK12 cc Pump		
SPEED FORWARD (kph)	0-10.46		0-12.1		0-12.1		0-12.1	0-12.9		0-12.9		0-14.5		0-17.7		
SPEED REVERSE (kph)	0-6.4		0-6.4		0-6.4		0-6.4	0-8		0-8		0-8		0-9.6		
DECK	Welded 11 ga		Welded 11 ga		Welded 11 ga		Welded 11 ga	Welded 10 ga		Welded 10 ga		Welded 10 ga		Welded 10 ga		
SPINDLE HOUSING	Die Cast Alloy		Die Cast Alloy		Die Cast Alloy		Alloy casting	Alloy casting		Alloy casting		Alloy casting		Ductile iron casting		
BLADE TIP SPEED (fpm)	16 700	16 600	18 400	18 400	18 600	18 900	18 600	18 600	18 910	18 410	18 600	18 910	18 410	18 580	18 340	18 410
BLADES	2	3	2	2	3	3	3	3	3	3	3	3	3	3	3	3
BLADE ENGAGEMENT	Electric		Electric		Electric		Electric	Electric		Electric		Electric		Electric		
CLUTCH SIZE (ft,lb)	105	105	105	105	105	105	105	125	125	125	200	200	200	200	200	200
CUTTING WIDTH (mm)	1066	1320	914.4	1030	1219	1371	1219	1196	1348	1500	1196	1348	1500	1196	1348	1500
CUTTING HEIGHT (mm)	38.1-114.3		38.1-114.3		38.1-114.3		38.1-114.3	38.1-114.3		38.1-114.3		38.1-114.3		25.4-139.7		
DISCHARGE	Side		Side		Side		Side	Side		Side		Side		Side		
DECK LIFT	Hand-operated		Foot-operated		Foot-operated		Foot-operated	Foot-operated		Foot-operated		Foot-operated		Foot-operated		
ANTI-SCALP WHEELS	1	2	1	1	3	3	4	3	3	3	3	3	3	3	3	3
GENERAL	11.36 L		11.36 L		11.36 L		11.36 L	18.9		18.9		18.9		38.9		
FRONT CASTOR TYRE	11"		13"		13"		9"	13"		13"		13"		13"		
REAR DRIVE TYRE	18"		20"		20"		20"	22"		22"		23"	23"	24"		
SEAT	Moulded Vinyl		Vinyl High Back		Vinyl High Back		Vinyl High Back	Vinyl High Back		Vinyl High Back		Vinyl High Back		Bolstered Grammer Suspension with operator isolation and armrests		
FOLDABLE ROPS	N/A		N/A		N/A		N/A	Standard		Standard		Standard		Standard		
SAFETY	Operator Presence		Operator Presence		Operator Presence		Operator Presence	Operator Presence		Operator Presence		Operator Presence		Operator Presence		
HOURLY METER	N/A		N/A	Standard	Standard	Standard	Standard	Standard		Standard		Standard		Standard		
DIMENSIONS	N/A		N/A		N/A		N/A	1673.35		1673.35		1686.05	1686.05	1724.7		
HEIGHT (mm) ROPS DOWN	990		1066		1066		1084.6	1158.75		1158.75		1171.45	1171.45	1333.5		
LENGTH (mm)	1850		1850		1850		1876.7	1869.4		1869.4		1869.4		2052.3		
WIDTH (mm) DISCHARGE CHUTE UP	1128	1358.9	947.4	1128	1244	1397	1244	1064.3	1399.5	1551.9	1064.3	1399.5	1551.9	1358.9	1505	1680
TYRE TO TYRE W (mm)	1040	1040	972.8	1040	1040	1168	1110	1193.8	1320.8	1320.8	1193.8	1320.8	1320.8	1193.8	1295.4	1376
WEIGHT (kg)	229	236.8	265.8	269	284.8	294.8	340	378	390	401	378	390	401	544	548	571
WARRANTY*	3 yrs, no Hr Limit		3 yrs or 300 hrs		3 yrs or 300 hrs		4 yrs or 400 hrs	4 yrs or 400 hrs		4 yrs or 1000 hrs		4 yrs or 1000 hrs		5 yrs or 500 hrs		
LIFETIME	N/A		N/A		N/A		N/A	Frame & leading edge of deck		Frame & leading edge of deck		Frame & leading edge of deck		Frame & leading edge of deck		
TRANSMISSION	3 yrs, no Hr Limit		3 yrs or 300 hrs		3 yrs or 300 hrs		4 yrs or 400 hrs	4 yrs or 400 hrs		4 yrs or 1000 hrs		4 yrs or 1000 hrs		5 yrs or 500 hrs		
SPINDLES	3 yrs, no Hr Limit		3 yrs or 300 hrs		3 yrs or 300 hrs		4 yrs or 400 hrs	4 yrs or 400 hrs		4 yrs or 1000 hrs		4 yrs or 1000 hrs		5 yrs or 500 hrs		
ENGINE	3 yrs		3 yrs		3 yrs		3 yrs Residential	3 yrs		3 yrs		3 yrs		3 yrs		

RESIDENTIAL & COMMERCIAL

		SUPER Z®			SUPER Z™ HYPERDRIVE					HUSTLER Z™ D I E S E L				SUPER 104	
MODEL		54"	60"	60" RD	60"	66"	72"	60" RD	60" EFI	72" EFI	54"	60"	60" RD	72"	104"
ENGINE	ENGINE	Kawasaki FX850			Kawasaki FX1000				B&S Vanguard V-Twin EFI		Shibaura			Kawasaki FX1000	
	HORSE POWER (hp)	27			35				37		25			35	
	DISPLACEMENT (cc)	852			999				993		1134			999	
	STARTER	12 Volt			12 Volt						12 Volt			12 Volt	
DRIVE SYSTEM	FUEL TYPE	Unleaded			Unleaded						Diesel			Unleaded	
	TYPE	Dual Hydrostatic			Dual Hydrostatic						Dual Hydrostatic			Dual Hydrostatic	
	TRANSMISSION	Parker TG310 Wheel Motors & Hydro-gear PY Pumps			Parker TG0280 Wheel Motors & Sauer Danfoss DDC-20						Parker TG0335 Wheel Motors & Hydro-gear 21 cc Pump			Parker TG0360 Wheel Motors & Sauer Danfoss DDC-20	
	SPEED FORWARD (kph)	0-25.75			0-25.75						0-19.3			0-17.7	
DECK	SPEED REVERSE (kph)	0-12.1			0-12.07						0-11.2			0-12.07	
	CONSTRUCTION	Welded 11ga. + 11ga. + 7ga			Welded 11ga. + 11ga. + 7ga						Welded 11ga. + 11ga. + 7ga			Welded 11 ga	
	SPINDLE HOUSING	Ductile Iron Casting			Ductile Iron Casting						Ductile Iron Casting			Ductile Iron Casting	
	BLADE TIP SPEED (fpm)	18 340	18 630	18 630	18 630	18 230	18 530	18 630	18 630	18 530	18 322	18 260	18 240	18 890	15 800
	BLADES	3	3	3	3	3	3	3	3	3	3	3	3	3	4
	BLADE ENGAGEMENT	Electric			Electric						Electric			Electric	
	CLUTCH SIZE (lb)	200	200	200	250	250	250	250	250	250	250	250	250	250	250
	CUTTING WIDTH (mm)	1371.6	1524	1524	1505	1657	1809	1505	1505	1657	1352	1505	1500	1830	2635
	CUTTING HEIGHT (mm)	25.4 -139.7			25.4 -139.7						25.5-140			25.5 -139.7	
	DISCHARGE	Side	Side	Rear	Side	Side	Side	Rear	Side	Side	Side	Side	Rear	Side	Rear
GENERAL	DECK LIFT	Foot-operated			Foot-operated						Foot-operated			Foot-operated	
	ANTI-SCALP WHEELS	3	3	3	3	3	3	3	3	3	3	3	3	3	7
	FUEL CAPACITY	45.4 L			45.4 L						54.5			54.5	
	FRONT CASTOR TYRE	13"			13"						13"			15"	
	REAR DRIVE TYRE	24"			26"						24"			26"	
	SEAT	Bolstered Grammer Suspension			Bolstered Grammer Suspension with operator isolation and armrests										
	FOLDABLE ROPS	Standard			Standard						Standard			Standard	
	SAFETY	Operator Presence			Operator Presence						Operator Presence			Operator Presence	
	HOUR METER	Standard			Standard						Standard			Standard	
	DIMENSIONS	HEIGHT (mm) ROPS UP	1816			1816						1750			1816
HEIGHT (mm) ROPS DOWN		1370			1370						1300			1370	
LENGTH (mm)		2146			2146						2172			2425.7	
WIDTH (mm) DISCHARGE CHUTE UP		1524	1676		1676	1828.8	1981.2	1676	1676	1981.2	1505	1676	1676	1981	2695 (wings down)
TYRE TO TYRE W (mm)		1447.8			1447.8	1524	1524	1447.8	1447.8	1524	1400	1420	1420	1420	1532
WEIGHT (kg)	685			792	805	818	792	792	818	746	769	769	798	1065.9	
WARRANTY*	ENTIRE PRODUCT	5 yrs or 500 hrs			5 yrs or 500 hrs						5 yrs or 500 hrs			5 yrs or 500 hrs	
	LIFETIME	Frame & leading edge of deck			Frame & leading edge of deck						Frame & leading edge of deck			Frame	
	TRANSMISSION	5 yrs or 500 hrs			5 yrs or 3000 hrs						5 yrs or 500 hrs			5 yrs or 500 hrs	
	SPINDLES	5 yrs or 500 hrs			5 yrs or 500 hrs						5 yrs or 500 hrs			5 yrs or 500 hrs	
	ENGINE	3 yrs			3 yrs						3 yrs			3 yrs	



PLP shall not be liable for technical or editorial errors or omissions contained herein, nor for incidental or consequential damages resulting from furnishing this material. The information is provided "as is" without warranty of any kind and is subject to change without notice. PLP also reserves the right to revise the content of this document at any time without prior notice. For more information regarding unit specs and availability, please see your local dealer. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording or storing in a retrieval system, or translated into any language in any form without prior written permission of PLP. Copyright © 2017 Roy Gripske & Sons Pty. Ltd. All rights reserved. 752.
Last Updated August 2017.

Photographic images are for illustrative purposes only.

1 300 363 027 | 1 800 33 22 13



hustlermower.com.au